

Exit & Emergency

Emergence Wet-Location Exit Series

- Wet-Location LED Polycarbonate Exit Sign
- White or Black Housing
- Field Selectable Red/Green Legend
- Field Selectable Single/Double Face
- Multiple Mounting Options
- Remote Capacity
- Self-Test/Self-Diagnostics

EMERGENCE™ SERIES



Specifications

Description

Halco's Wet-Location Exit Sign Series offers a code compliant exit sign that was specifically designed for demanding environments. The field-selectable red/green legend, field-selectable single/double face, and universal ceiling/end/wall mounting includes field-selectable chevron indicators as well as universal input voltage to provide a highly configurable exit sign. The EMG-WLEX utilizes a fully gasketed lens and housing to perform well in wet location installations.

Electrical

- 120 / 277 VAC, 60Hz input
- Self-testing/self-diagnostics with battery charging indicator
- Long-life maintenance free LiFePO4 battery
- 24 hour recharge time
- -20°C - 50°C operating temperature
- 1.5 Watts of remote capacity

Certifications

- UL924 wet, cold location listed
- NFPA 101 and NFPA 70
- CEC T20 Compliant

Construction & Mounting

- Gasketed polycarbonate lens with 5VA thermoplastic housing
- Fully illuminated 6" characters with 3/4" stroke
- Field-selectable, snap in and out chevrons
- Suitable for wall, ceiling and end mount, canopy included
- Universal J-Box mounting pattern on back plate
- 5 year warranty
- Field-selectable Red/Green legend

Exit & Emergency

Emergency Wet-Location Exit Series


Ordering Information

Product SKU	Product Code	Product Description
97126	EMG-WLEX-WH-RG	Emergency Series, Wet, Cold-Location, Exit Sign, White Housing, Field-Selectable Red or Green Legend with Field-Selectable Single/Double Face, Self-Diagnostics, Remote Capacity
97127	EMG-WLEX-BK-RG	Emergency Series, Wet, Cold-Location, Exit Sign, Black Housing, Field-Selectable Red or Green Legend with Field-Selectable Single/Double Face, Self-Diagnostics, Remote Capacity
Remote Heads		
97012	EV2-RH-1-OUT-RD	Evade Single Remote Outdoor Round Head, White
97013	EV2-RH-2-OUT-RD	Evade Double Remote Outdoor Round Head, White
97118	EMG-RH-1-OUT-BK	Emergency Single Remote Outdoor Round Head, Black
97119	EMG-RH-2-OUT-BK	Emergency Double Remote Outdoor Round Head, Black

Specifications Table

	EMG-WLEX-XX-RG
Housing	Injection-Molded Thermoplastic Housing, Polycarbonate Lens
Surface Mounting	Ceiling, End or Wall - Canopy Included
Face	Field Selectable Single/Double Face
Legend	Uniformly Illuminated 6" height, 3/4" stroke
Chevrons	Field Selectable Snap-in/out
Letter Color	Selectable Red/Green
LED Life Expectancy	100,000 hours+
Input Voltage	120 or 277 VAC
Wattage	2.2W
Frequency	60Hz
Battery	Maintenance Free LiFePO4 Battery
Recharge Time	<24 Hours
Discharge	>90 Minutes
Remote Capacity	1.5 Watts @ 6VDC
Testing Function	Self-Testing/Self-Diagnostics
Operating Temperature	-20°C to 50°C
Listings & Compliance	UL 924, CEC Title 20, NFPA 70 & NFPA 101
Environment	Wet Location Listed
Warranty*	5 Year

Dimensions

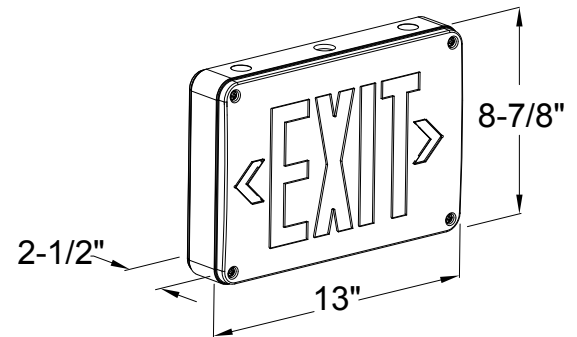

* All life safety equipment, including emergency lighting for path of egress must be maintained, serviced, and tested in accordance with all National Fire Protection Association (NFPA) and local codes. Failure to perform the required maintenance, service, or testing could jeopardize the safety of occupants and will void all warranties.