Environ - 120W LED Area Light

Order Code: ENV-120CT5-BBZ

Product Performance	
Wattage	120W
Lumen Output	13560
Correlated Color Temperature (CCT)	5000K
Color Rendering Index (CRI)	70+
Lumen Maintenance @50,000 hours*	99%
Calculated L70 @ 25°C Ambient in Hours*	>500,000
Distribution	Type 5
Replaces HID Wattage	175W V, 250W H
Operating Temperature Range	-40°F to 104°F (-40°C to 40°C)

Physical Characteristics	
Fixture Color	Bronze
EPA	1.56
Weight	13.9 lbs (6.3kg)
Width	10.25"
Length	17.5"
Height	6.01"

Electrical Characteristics	
Input Voltage Range	347-480V
Amperage Draw (Input Volts/Amps)	347/0.33 480/0.24
Surge Protection	10kA

Regulatory Qualifications
cULus Listed, Rated for wet locations

Accessories
EN14178 Round pole straight arm - bronze
EN26814 Square pole mount - bronze
EN35512 Adjustable slipfitter - bronze
EN38419 Mast arm - bronze
EN47832 Wall mount - bronze
PH81156 3-Pin Twist lock photocell (480V)
PH87145 3-pin Twist lock photocell (347V)
PH81975 Replacement shorting cap
Add suffix "-M34" to order code for a factory installed fixture with a Motion/Dim/Photocell Sensor
Add suffix "-SH" to order code for a factory installed fixture with backlight shield
Add suffix "-SHM12" to order code for a factory installed fixture with backlight shield & Motion/Dim/Photocell sensor
SP12826 – 347-480V Surge Protector

NOTE:

*Lumen maintenance data is based on LED testing per IESNA LM-80-08 and projected per IESNA TM-21-11

Venture Environ - 120W LED Area Light

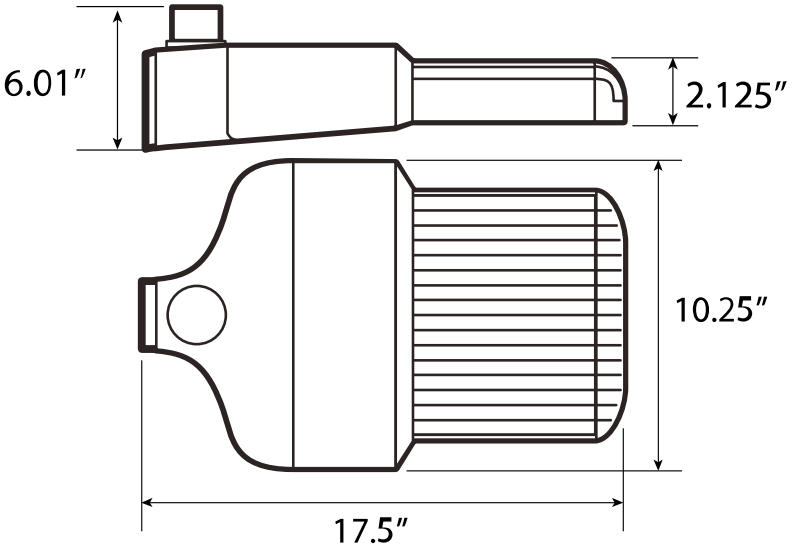

PH81975

EN26814

EN38419

EN14178

EN35512

EN47832

Accessories

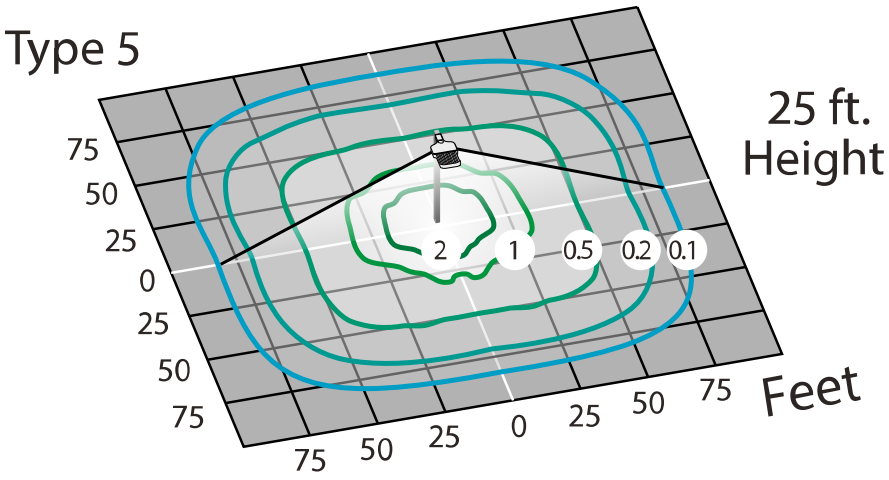

VENTURE LIGHTING