



EPC-2-M-D



Emergency Power Control
For 0-10V & DALI Dimmable Loads

Product Application

In the past, emergency lights were kept on 24 hours a day to meet life safety codes. Now, you can use a UL 924 listed Emergency Power Control, Model **EPC-2-M-D**, to convert regular light fixtures into approved emergency lights. The **EPC-2-M-D** saves energy and money while ensuring compliance with both life safety and energy codes.

During normal operation, the same dimmer, occupancy sensor, dimming panel, or lighting control can switch and dim regular and emergency fixtures on and off simultaneously.

During a utility power interruption, the **EPC-2-M-D** automatically bypasses the regular lighting controls, turning the emergency lights ON at full brightness, regardless of dimmer position.

The **EPC-1-M-D** is ceiling or wall mounted in a junction box with a single gang plaster ring and is usually located in the area where the emergency fixtures are installed.

Features

- Isolated 0-10V relay contact ensures full bright-ness during! utility power interruption, regardless of dimmer model.
- When the room switch is turned off, the **EPC-2-M-D** will!run a 2.5 self-test routine, verifying that the emergency!power source was available and that the **EPC-2222-M-D**,!ballast, and lamp(s) are all function-ing correctly. This!feature eliminates the need for time-consuming and costly!manual monthly testing and is approved for this purpose.!This also allows the unit to be installed in remote or!inaccessible locations, because the unit does not rely on!access to its manual test switch.
- Fire Alarm, Remote Test & 0-10V Dimming Option
- Utility & Emergency Power Indicator LED's
- Slim, attractive flush mount profile allows easy access to! manual test switch and LED's.

Ordering

EPC-2-M-D

PROJECT:


FIXTURE TYPE:

LOCATION:

CONTACT/PHONE:



Mounting

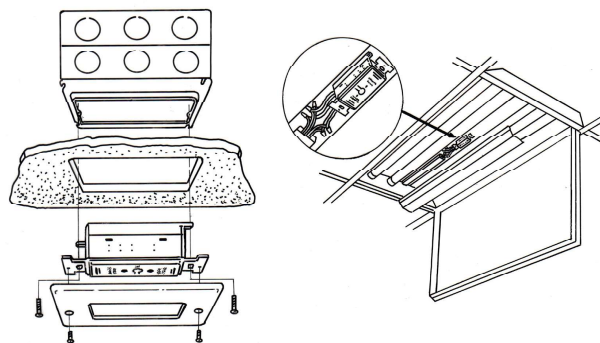

0-10 Dimmer
Compatible



LED COMPATIBLE

UL **US**
C **UL924 LISTED**



5
YEAR
WARRANTY



EPC-2-M-D



Emergency Power Control
For 0-10V & DALI Dimmable Loads


PROJECT:

FIXTURE TYPE:


LOCATION:

CONTACT/PHONE:

SINGLE LINE DRAWING

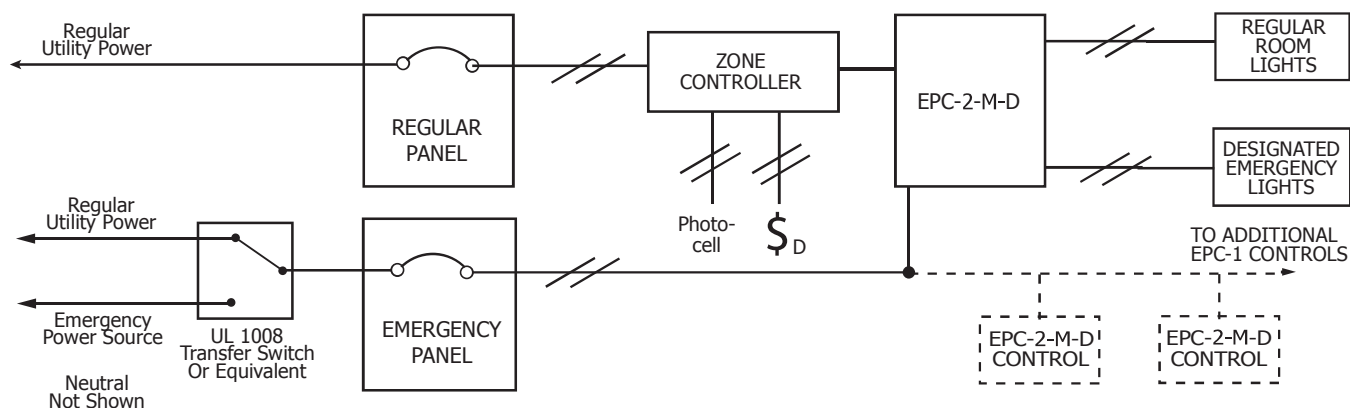

WIRING DIAGRAM

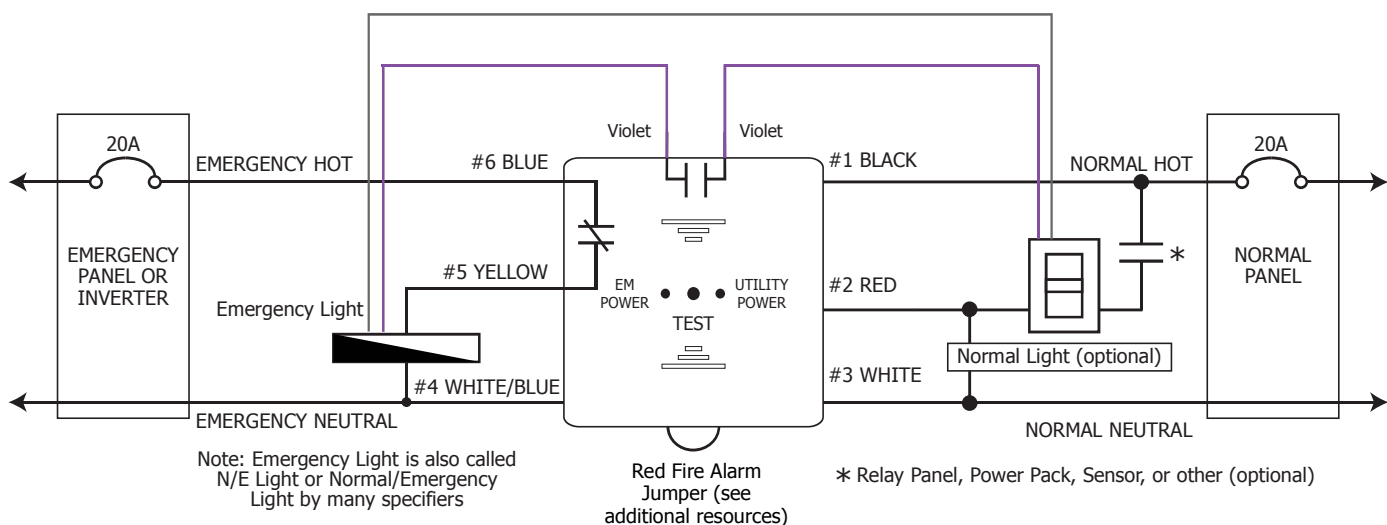

SPECIFICATIONS

ELECTRICAL	MODEL NO.	EPC-2-M-D
	SENSING INPUT	120V - 277V
	LOAD RATING	120V - 277V (20A)
	BALLAST LOAD RATING	20A (120-277V)
	INCANDESCENT LOAD	1200W (120V) / 1500W (277V)
	WARRANTY	5 Year Replacement Warranty

MECHANICAL	MOUNTING	4-11/16" Junction Box w/ single gang plaster
	RATING	UL94-5VA
	SHIPPING WEIGHT / COLOR	12 oz. / White
	TEMPERATURE	32°F - 140°F (0°C - 60°C)
	FLUSH MOUNTED SIZE	Single Gang Size
	BODY SIZE	1.7" x 3" x 1.2" (W x H x D body)