


4

3

DWG NO. 1000369 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

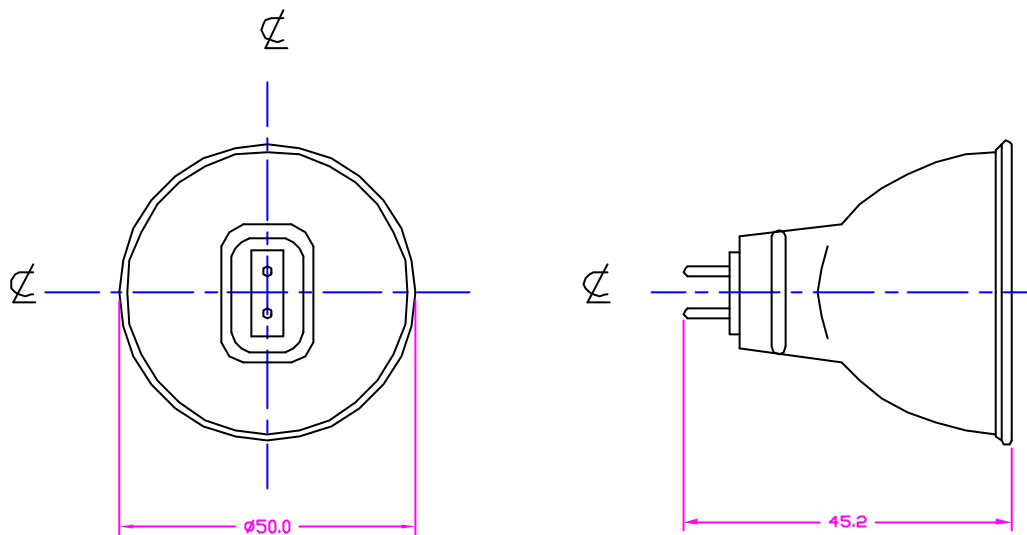

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	12 V
WATTAGE	20 W
TOTAL LUMENS	4800 Lm
COLOR TEMP	2950 K
AVERAGE LIFE	3500 HRS
BASE TYPE	GU5.3
BEAM ANGLE	12°
FILAMENT TYPE	C-8
BURN POSITION	Any

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10307 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630		
		APPROVALS				DATE
		DRAWN	R.AMPARO	12/14/99	TITLE ESX/C/A/FG HALOGEN LAMP	
		CHKD	D.GILCZYNSKI	12/14/99		
		ENGR				
		MFG				
		QUAL				
MATERIAL COMPOSITE		SIZE		CODE IDENT NO.	DWG NO.	
FINISH		DSGN ACTVY		B	ESX	1000369
		GOVT ACTVY		SCALE	WEIGHT	SHEET
				NONE		1 OF 1

4

3

2

1

CAD