


INCANDESCENT LAMPS

Decorative

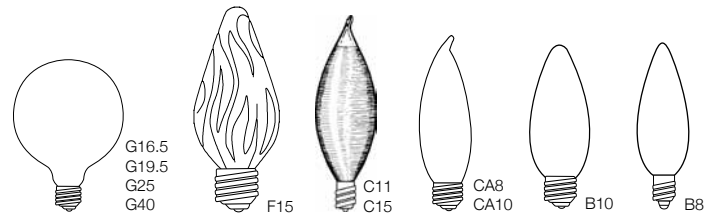

| Bulb | Base | Product Number | Footnotes | Product Code | Description | Pkg. Qty. | Volts | Lumens | Avg. Life | Design Filament | MOL | Beam Spread |
|----------------|--------------|----------------|--------------|--------------------|--------------------------|-----------|-------|--------|-----------|-----------------|-------|-------------|
| 40 WATT | | | | | | | | | | | | |
| B8 | Cand. | 1023 | 2 | CTCP40 | Clear 25mm | 25/500 | 130 | 370 | 3000 | CC-2V | 3.15" | - |
| B10 | Cand. | 1006 | 2 | CTC40 | Clear 32mm | 25/500 | 130 | 370 | 3000 | CC-2V | 3.87" | - |
| | | 1007 | 2 | CTF40 | Frost 32mm | 25/500 | 130 | 370 | 3000 | CC-2V | 3.87" | - |
| | E14 | 121025 | X, 2 | CTC40/E14 | Clear 32mm | 25/500 | 130 | 370 | 3000 | CC-2V | 3.87" | - |
| | Med. | 1015 | 2 | ETC40 | Clear 32mm | 25/500 | 130 | 370 | 3000 | CC-2V | 3.87" | - |
| | | 102148 | 2 | ETC40/CS | Clear CoverShield® | 25/500 | 130 | - | 3000 | CC-2V | 3.87" | - |
| 1016 | | 2 | ETF40 | Frost 32mm | 25/500 | 130 | 370 | 3000 | CC-2V | 3.87" | - | |
| CA8 | Cand. | 2023 | 2 | CFCP40 | Clear 25mm | 25/500 | 130 | 370 | 3000 | CC-2V | 3.58" | - |
| CA10 | Cand. | 2006 | 2 | CFC40 | Clear 32mm | 25/500 | 130 | 370 | 3000 | CC-2V | 4.12" | - |
| | | 2007 | 2 | CFF40 | Frost 32mm | 25/500 | 130 | 370 | 3000 | CC-2V | 4.12" | - |
| | Med. | 2015 | 2 | EFC40 | Clear 32mm | 25/500 | 130 | 370 | 3000 | CC-2V | 4.12" | - |
| | | 2016 | 2 | EFF40 | Frost 32mm | 25/500 | 130 | 370 | 3000 | CC-2V | 4.12" | - |
| C11 | Cand. | 100212 | 2 | C11SG40 | Clear Spun Glow | 25/500 | 130 | - | 1500 | CC-2V | 4.02" | - |
| C15 | Med. | 100216 | 2 | C15SG40 | Clear Spun Glow | 25/500 | 130 | - | 1500 | CC-2V | 4.49" | - |
| | | 100224 | X, 2 | C15SG40/AMB | Amber Spun Glow | 25/500 | 130 | - | 2000 | C-9 | 4.49" | - |
| F15 | Med. | 3004 | 2 | F15CL40 | Clear | 25/250 | 130 | 300 | 3000 | C-9 | 4.50" | - |
| | | 3006 | 2 | F15AMB40 | Amber | 25/250 | 130 | - | 3000 | C-9 | 4.50" | - |
| G16.5 | Cand. | 4003 | 2 | G16CL40 | Clear | 25/500 | 130 | 370 | 3000 | CC-2V | 3.00" | - |
| | | 4017 | 2 | G16WH40 | White | 25/500 | 130 | 320 | 3000 | CC-2V | 3.00" | - |
| G19.5 | Med. | 104504 | X, 2 | G19WH40 | White | 25/500 | 130 | 340 | 2000 | C-9 | 3.50" | - |
| G25 | Med. | 5003 | | G25CL40 | Clear | 10/100 | 130 | 300 | 3500 | C-9 | 4.50" | - |
| | | 125003 | | G25CL40/120 | Clear | 10/100 | 120 | 300 | 3500 | C-9 | 4.50" | - |
| | | 102380 | | G25CL40/SB | Clear Silver Bowl Prism® | 10/100 | 130 | - | 3500 | C-9 | 4.50" | - |
| | | 5004 | | G25WH40 | White | 10/100 | 130 | 270 | 3500 | C-9 | 4.50" | - |
| | | 125004 | X | G25WH40/120 | White | 10/100 | 120 | 280 | 3500 | C-9 | 4.50" | - |
| G40 | Med. | 5203 | | G40CL40 | Clear | 6/24 | 130 | 260 | 5000 | C-9 | 6.93" | - |
| | | 5202 | | G40WH40 | White | 6/24 | 130 | 240 | 5000 | C-9 | 6.93" | - |

Ⓢ Means this lamp meets Federal Minimum Efficiency standards.
Incandescent lamps symbols, footnotes and abbreviations are located on pages 151-153.