


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

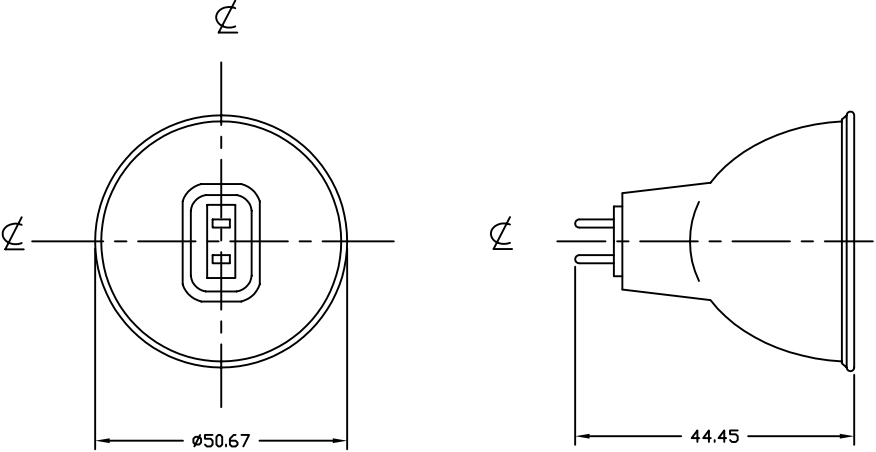

- NOTES:
1. ALL DIMENSIONS ARE IN MM.
 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS			
VOLTAGE	82 V		
WATTAGE	250 W		
COLOR TEMP	3300 K		
AVERAGE LIFE	50 HRS		
BASE TYPE	GY5.3		
REFLECTOR TYPE	Stippled		
FILAMENT TYPE	CC-8	NEXT ASSY	USED ON
BURN POSITION	BD/Hor	APPLICATION	

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING	CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630		
	APPROVALS		DATE		
	DRAWN	R.AMPARO	08/26/99		TITLE EVW JCR82V-250W
	CHKD	D.GILCZYNSKI	08/26/99		
	ENGR				
	MFG				
QUAL					
MATERIAL COMPOSITE	DSGN ACTVY		SIZE	CODE IDENT NO.	DWG NO.
FINISH			B	EVW	1000386
	GOVT ACTVY		SCALE	WEIGHT	SHEET
			NONE		1 OF 1