

|              |       |
|--------------|-------|
| Project:     | Type: |
| Prepared By: | Date: |

**Technical Specifications**

**Performance**

**Product Type:**

Chicago-Approved Steel Exit/Stair Sign

**Description:**

Chicago-approved exit sign with a single face, red letters, and 90 minutes of emergency battery backup.

**Input Wattage:**

5W @120V and 277V

**Electrical**

**Power Factor:**

≥0.4

**Input Voltage:**

Dual 120/277 Voltage

**Operating Frequency (Hz):**

60Hz

**Input Current @ 120V (mA):**

10mA

**Input Current @ 277V (mA):**

50mA

**Dual Voltage Circuit Operation:**

No

**Operating Temperature:**

32°F to 122°F (0°C to 50°C)

**Emergency Illumination:**

120 minutes

**Battery Type:**

Nickel Cadmium

**Battery Voltage:**

4.8V

**Recharge Time Required:**

24-hours

**Battery Operating Temperature:**

0°F to 50°F (32°C to 122°C)

**Storage Temperature:**

68°F to 86°F (20°C to 30°C)

**Storage Shelf Life:**

3 years before the initial charge. 5 years after initial charge.

**Self Diagnostics:**

No, manual test only

**Remote Test Switch:**

No

**Emergency Backup**

**Battery Backup:**

Yes

**Installation**

**Mounting Method:**

Back/Top/End

**Mounting Type:**

Wall/Ceiling Mount

**Cold Weather Rated:**

No

**Construction**

**Shape:**

Rectangle

**Housing Material:**

Steel Sheet

**Panel Material:**

Glass

**Panel Color:**

White

**Letter Color:**

Red

**Technical Specifications (continued)****Housing Color:**

White

**Number of Faces:**

Single Face

**Arrow Direction:**

Right Arrow

**Sign Format:**

Panel

**Remote Capacity:**

No

**Compliance****Listings:**UL924 Listed, NFPA 101 (current Life Safety Code),  
NEC and OSHA illumination standards**Environment:**Suitable for indoor use in dry and damp  
environments**IP Rating:**

Indoor

**Certification Model Number:**

CAXTEU1RWEM-RA

**T20 Compliant:**Can be used to conform with the requirements of  
California Title 20**California Title 24 JA8 Compliant:**

Not applicable

**California Energy Commission (CEC) Status:**

Lawful for Sales in California

**City Compliance:**

Chicago Approved


**FCC:**

Complies with Part 15 of the FCC Rules

**Other****5-Year, No-Compromise Warranty:**RAB warrants that our LED products will be free from  
defects in materials and workmanship for a period of  
five (5) years from the date of delivery to the end  
user, including coverage of light output, color  
stability, driver performance and fixture finish. RAB's  
warranty is subject to all terms and conditions found  
at [rablighting.com/warranty](http://rablighting.com/warranty).

Battery is prorated.

## Dimensions

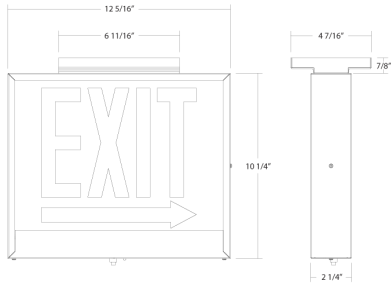

## Features

- Single-face panel with red letters
- Steel housing
- Approved for use in the city of Chicago
- Compliant with California Title 20

## Ordering Matrix

| Family | Face                                  | Exit Sign Letter Color   | Arrows   | Housing               | State   | Battery Backup                                   | Remote Capable                                  |
|--------|---------------------------------------|--------------------------|--|-----------------------|---|--|---|
| EXIT   | 1                                     |                          | RA   |                       | CH  | /E   |   |
|        | 1 = 1 Face<br>Blank = Universal Faces | Blank = Red<br>G = Green | LRA = Left Right Arrow<br>RA = Right Arrow<br>LA = Left Arrow<br>DA = Double Arrow<br>Blank = No Arrow | Blank = White Housing | Blank = Standard<br>CH = Chicago<br>NY = New York | Blank = No Battery Backup<br>/E = Battery Backup | Blank = No Remote Capable<br>R = Remote Capable |