



LED Exit Sign T6 Bulbs

Only 1.5 Watts, Replaces Incandescents up to 20W – E12, E17 Screw Bases or 15mm DC Bayonet



FEATURES

- 5 Year Lamp Warranty
- Up to 90% Energy Reduction over Incandescents
- Long Lifespan: White LEDs up to 100,000 Hours
- Solid State – Shock & Vibration Resistant
- High Lumen / High Efficacy
- UL V-0 Rated, Semi-Frosted Polycarbonate Tube
- Wide Oper. Temperature Range: -22°F to 122°F

APPLICATIONS

- Compatible with Most Standard Single or Double-Sided EXIT Signs
- Decorative & Accent Lighting
- Picture Lights

AVAILABLE OPTIONS

- Other Colors, Voltages & Base Types




Over 30 Years of LEDtronic Design, Engineering & Manufacturing Experience



E12 Base

EXLT6-4E12-XIW-002 (Warm White)
EXLT6-4E12-XNW-002 (Natural White)

| | XIW | XNW |
|--------------------|--------------------------------|---------------|
| Color Temperature | 2800K~3300K | 3800K~4300K |
| Emitted Color | Warm White | Natural White |
| Input Power | 1.5 Watts | |
| Input Voltage | 120VAC | |
| Input Current | 0.032A | 0.035A |
| Efficacy | 100 lm/W | 120 lm/W |
| Lumens | 150 lm | 180 lm |
| Power Factor | 0.34 | |
| Illumination Angle | 250° Double Side | |
| Oper. Temperature | -22°F ~+122°F / -30°C ~+50°C | |
| Base | E12 Candelabra Screw | |
| Tube Material | Polycarbonate (UL V-0 Rating) | |
| Tube Color | Clear Semi-Frosted | |
| Dimensions | 4.13 x 0.98 inch / 105 x 25 mm | |
| Net Weight | 0.64 oz / 18.14 g | |

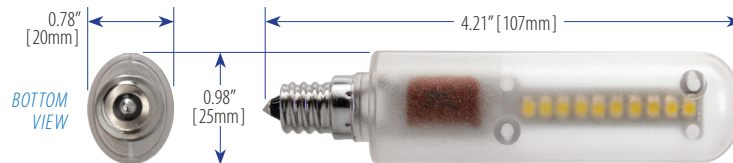

LEDTRONICS®

America's Premium Brand LED Company™



23105 Kashiwa Court, Torrance, CA 90505
 Phone: (800) 579.4875 / (310) 534.1505
 Fax: (310) 534.1424
 E-mail: info@ledtronics.com
 Website: ledtronics.com



© 2016 LEDtronics, Inc.

To order LEDtronic products, contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:
LEDtronic.com

LED Exit Sign T6 Bulbs – E17 Screw Base

2

WWW.LEDTRONICS.COM




E17 Base

EXLT6-4E17-XHW-002 (Halogen White)

EXLT6-4E17-XNW-002 (Natural White)

EXLT6-4E17-XPW-002 (Pure White)

| | XHW | XNW | XPW |
|---------------------------|--------------------------------|-------------|-------------|
| Color Temperature | 2800K~3300K | 3800K~4300K | 5500K~6500K |
| Input Power | 1.5 Watts | | |
| Input Voltage | 120VAC | | |
| Input Current | 0.032A | | |
| Efficacy | 100 lm/W | 120 lm/W | 120 lm/W |
| Lumens | 150 lm | 180 lm | 180 lm |
| Illumination Angle | 250° Double Side | | |
| Oper. Temperature | -22°F ~+122°F / -30°C ~+50°C | | |
| Base | E17 Intermediate Screw | | |
| Tube Material | Polycarbonate (UL V-0 Rating) | | |
| Tube Color | Clear Semi-Frosted | | |
| Dimensions | 4.13 x 0.98 inch / 105 x 25 mm | | |
| Net Weight | 0.64 oz / 18.14 g | | |

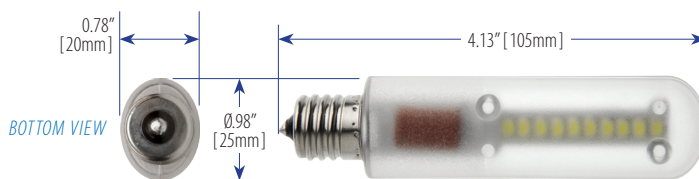


LED Exit Sign T6 Bulbs – Ba15d Bayonet Base



Ba15d Double Contact Bayonet Base

EXLT6-4BA15D-XNW-002

| | |
|---------------------------|--------------------------------|
| Input Power | 1.5 Watts |
| Input Voltage | 120VAC |
| Input Current | 0.035A |
| Efficacy | 185 lm/W |
| Lumens | 280 lm |
| Power Factor | 0.34 |
| Emitted Color | Natural White |
| Color Temperature | 3800K~4300K |
| Illumination Angle | 250° Double Side |
| Oper. Temperature | -22°F ~+122°F / -30°C ~+50°C |
| Base | Ba15d Dual-Contact Bayonet |
| Tube Material | Polycarbonate (UL V-0 Rating) |
| Tube Color | Clear Semi-Frosted |
| Dimensions | 4.25 x 0.98 inch / 108 x 25 mm |
| Net Weight | 0.64 oz / 18.14 g |

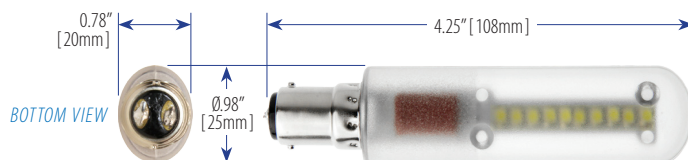

LOG 617