


DWG NO. 1000453 SH 1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

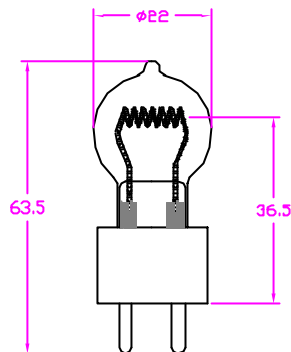

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	250 W
LUMEN OUTPUT	8050 Lm
COLOR TEMP.	3000 K
BASE TYPE	C5.3
AVERAGE LIFE	100 HRS
FILAMENT TYPE	CC-6
BURN POSITION	BD/Hor

NEXT ASSY	USED ON

APPLICATION

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Carritos Ave. Cypress, CA 90630	
		APPROVALS			
		DRAWN	DATE	TITLE	
		CHKD	DATE		
		ENTBR		EYH/FKT JCD120V-250WB HALOGEN LAMP	
MATERIAL		MFG			
COMPOSITE		QUAL		SIZE	CODE IDENT NO.
FINISH		OBEN ACTVY		B	EYH
		GOVT ACTVY		SCALE	DWG NO.
				NONE	1000453
				WEIGHT	SHEET
					1 OF 1

4

3

1

D

D

C

C

B

B

A

A

4

3

2

1

CAD