

Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacor.com

Customer Name:
Project Name:
Fixture Type:



GE
Lighting

46671 - F14W/T5/835/ECO

GE Ecolux® Starcoat® T5

- Passes TCLP, which can lower disposal costs.

a product of
ecomagination™



High Color Rendering



GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
	Linear
Bulb	T5
Base	Miniature Bi-Pin (G5)
Wattage	14
Voltage	82
Rated Life	30000 hrs
Rated Life (rapid start) @ Time	30000.0 @ 3.0/36000.0 @ 12.0 h
Bulb Material	Soda lime
Starting Temperature	-20 °C (-4 °F)
LEED-EB MR Credit	121 picograms Hg per mean lumen hour
Additional Info	TCLP compliant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1350
Mean Lumens	1240
Nominal Initial Lumens per Watt	96
Color Temperature	3500 K
Color Rendering Index (CRI)	85
S/P Ratio (Scotopic/Photopic Ratio)	1.5

ELECTRICAL CHARACTERISTICS

Open Circuit Voltage (rapid start) Min @ Temperature	230 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor	1.7

DIMENSIONS

Maximum Overall Length (MOL)	22.1700 in(563.1 mm)
Nominal Length	21.600 in(548.6 mm)
Bulb Diameter (DIA)	0.625 in(15.9 mm)
Bulb Diameter (DIA) (MAX)	0.625 in(15.9 mm)
Max Base Face to Base Face (A)	21.610 in(548.9 mm)
Face to End of Opposing Pin (B) (MIN)	21.790 in(553.5 mm)
Face to End of Opposing Pin (B) (MAX)	21.890 in(556.0 mm)

PRODUCT INFORMATION

Product Code	46671
Description	F14W/T5/835/ECO
Standard Package	Case
Standard Package GTIN	10043168466711
Standard Package Quantity	40
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	40
UPC	043168466714

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning


- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Lumen Maintenance

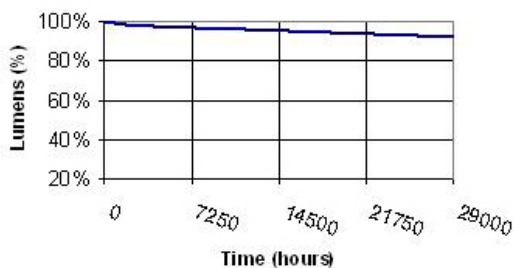

Lamp Mortality

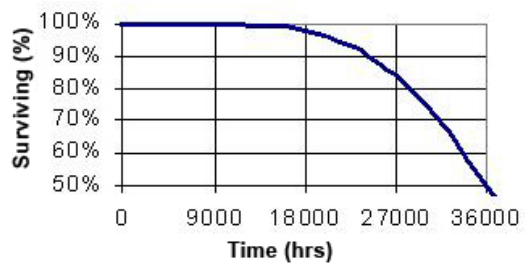

Spectral Power Distribution

