

# F26T8/SPX 1 5/8" Mod-U-Line®

## Product Description

Product Code  
Case Quantity

## F26T8/SPX30/U/ECO

62169  
15

## F26T8/SPX35/U/ECO

62170  
15

## F26T8/SPX41/U/ECO

62171  
15

## Physical Characteristics

|                                   |                     |                     |                     |
|-----------------------------------|---------------------|---------------------|---------------------|
| Bulb Designation                  | T8                  | T8                  | T8                  |
| Bulb Material                     | Soda Lime           | Soda Lime           | Soda Lime           |
| Max Bulb Diameter in Bend (D)     | 1.10"               | 1.10"               | 1.10"               |
| Nominal Bulb Diameter (D)         | 1" (25.4mm)         | 1" (25.4mm)         | 1" (25.4mm)         |
| Base Type                         | Medium Bi-Pin (G13) | Medium Bi-Pin (G13) | Medium Bi-Pin (G13) |
| Base Face to Top of Lamp          | 22 1/4"             | 22 1/4"             | 22 1/4"             |
| Lamp Legs Center to Center Length | 1 5/8"              | 1 5/8"              | 1 5/8"              |
| Max Overall Length (C)            | 22.6"               | 22.6"               | 22.6"               |
| Nominal Overall Length (C)        | 22 1/2"             | 22 1/2"             | 22 1/2"             |


## Electrical Characteristics

|                            |       |       |       |
|----------------------------|-------|-------|-------|
| Nominal Lamp Watts (W)     | 26    | 26    | 26    |
| Nominal Lamp Voltage (V)   | 135   | 135   | 135   |
| Nominal Lamp Current (A)   | 0.265 | 0.265 | 0.265 |
| Minimum Starting Temp (°F) | 60    | 60    | 60    |


## Photometric Characteristics

|                                                |       |       |       |
|------------------------------------------------|-------|-------|-------|
| Reference - Initial Lumens                     | 2250  | 2250  | 2250  |
| Nominal Efficacy (Lumens/Watt)                 | 88    | 88    | 88    |
| Avg Rated Life (hrs) 3 hr cycle - PRS ballast  | 24000 | 24000 | 24000 |
| Avg Rated Life (hrs) 12 hr cycle - PRS ballast | 30000 | 30000 | 30000 |
| Color Rendering Index (Ra) CRI                 | 82    | 82    | 82    |
| Correlated Color Temperature (Kelvin)          | 3000  | 3500  | 4100  |


Spectral Power Distribution  
(3000K)

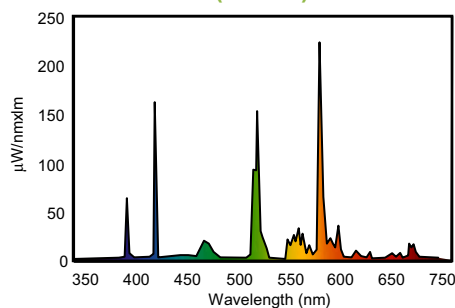


Spectral Power Distribution  
(3500K)

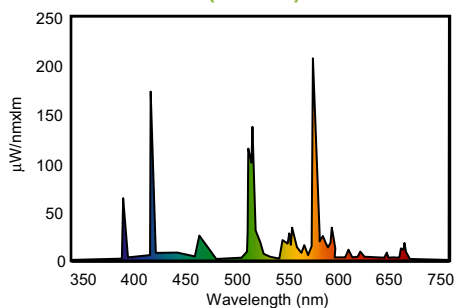

Spectral Power Distribution  
(4100K)

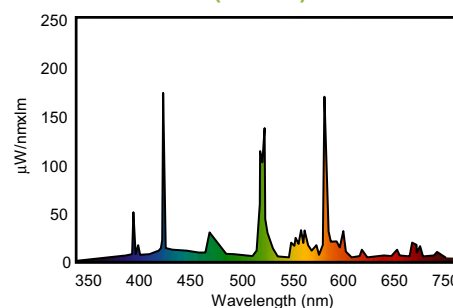

Life Expectancy

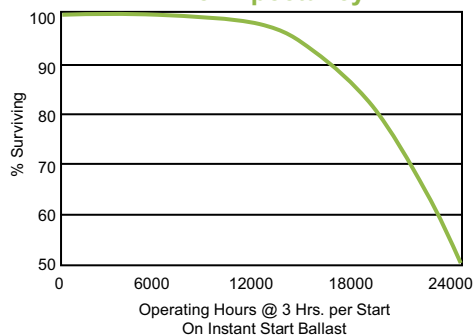

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, express or implied, that such performance will be obtained under end-use conditions.