


# LINEAR FLUORESCENT LAMPS

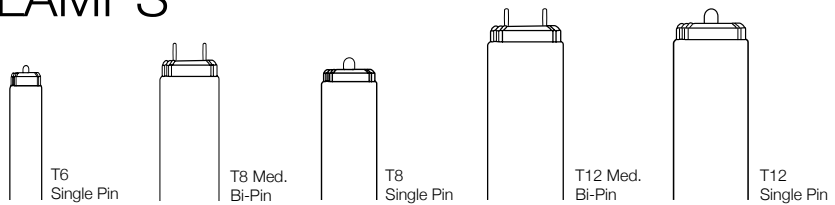

Bulb	Watts	Product Number	Footnotes	Product Code	Description	Pkg. Qty.	Color Temp.	CRI	Initial Lumens	Mean Lumens	Avg. Life	Nom. Length
<b>ProLume T-8 Rapid Start - Medium Bi-Pin Eco-Shield® continued</b>												
T8	32	37200	1	F32T8BLB	Blacklight-Blue	12	-	-	-	-	20000	48"
	40	30171	1	F40T8/735/ECO	735 Phosphor	30	3500	78	3600	3450	24000	60"
	40	30172	1	F40T8/741/ECO	741 Phosphor	30	4100	78	3600	3450	24000	60"
	58	35179	1	F58T8/840	840 Phosphor	25	4000	86	5300	5000	24000	60"
	70	39452	1	F70T8/840/M	840 Phosphor Major	25	4000	85	6000	5985	20000	70"

## T-8 Rapid Start - Single Pin

T8	59	23411	Ⓜ \$ 1	F96T8/735/M	735 Phosphor Major	24	3500	75	5700	5130	15000	96"
	59	23412	Ⓜ \$ 1	F96T8/741/M	741 Phosphor Major	24	4100	72	5700	5130	15000	96"
	59	205773	Ⓜ \$ 1	F96T8/850/M	850 Phosphor Major	24	5000	80	5900	5428	15000	96"

## ProLume T-12 Rapid Start - Medium Bi-Pin

T12	30	9204	1	F30T12CW	Cool White	30	4100	62	2100	1830	8000	36"
	30	9236	1	F30T12DL	Daylight	30	6500	74	1900	1650	8000	36"
	30	313742	1	F30T12WW	Warm White Major	30	3000	53	2300	2000	18000	36"
	34	24588	1	F34CWX/SS/M	Cool White Deluxe Major	30	4100	87	1925	1656	20000	48"
	40	423889	1	F40CWS/ECO/M	Cool White Supreme Major	30	4100	89	2600	2250	20000	48"
	40	109480	1	F40/350BL	Blacklight	6	-	-	-	-	20000	48"
	40	109490	1	F40BLB	Blacklight-Blue	6	-	-	-	-	20000	48"

## Slimline Instant Start - Single Pin

T6	25	24266	1	F42T6CW/M	Cool White Major	24	4100	60	1750	1540	7500	42"
T12	39	363218	1	F48CW/M	Cool White Low Mercury Major	15	4100	62	2950	2600	9000	48"
	39	387019	1	F48DL/M	Daylight Low Mercury Major	15	6500	79	2500	2375	9000	48"
	50	26001	1	F60CW/M	Cool White Major	30	4100	60	3700	3256	12000	60"
	50	23076	1	F60DL/M	Daylight Major	30	6500	76	3000	2640	12000	60"
	50	355768	1	F64CW/M	Cool White Major	30	4100	60	3900	3432	12000	64"
	50	355776	1	F64DL/M	Daylight Major	30	6500	76	3300	2904	12000	64"
	56	369892	1	F72CW/M	Cool White Low Mercury Major	15	4100	59	4450	3900	12000	72"
	56	369850	1	F72DL/M	Daylight Low Mercury Major	15	6500	79	3800	3350	12000	72"
	70	13764	1	F84CW/M	Cool White Major	15	4100	60	5300	4664	12000	84"
	75	423194	1	F96CWS/ECO/M	Cool White Supreme Major	15	4100	89	5000	4250	12000	96"
	75	14067	Ⓜ 1	F96/735/M	735 Phosphor Major	15	3500	70	6420	5906	12000	96"

Ⓜ Means this lamp meets Federal Minimum Efficiency standards.  
Linear Fluorescent lamp symbols, footnotes and abbreviations are located on pages 90-91.