

Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacor.com

Customer Name:
Project Name:
Fixture Type:




GE
Lighting

21323 - F40KB/ECO 6PK

GE Kitchen & Bath T12

- For use in kitchens and baths
- Food looks fresher & skin tones are more attractive
- Lasts up to 7 years!
- Passes TCLP, which can lower disposal costs.

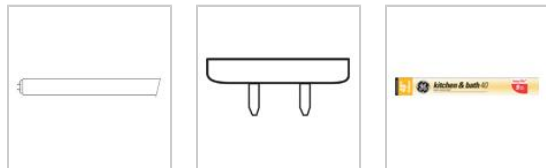

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.


Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
 - Avoid direct water/liquid contact.

*GE Ecolux Fluorescent lamps contain less than 1/2 the 1994 industry average of mercury for 4 foot Fluorescent lamps and they pass the EPA Toxicity Characteristic Leaching Procedure (TCLP) test.

GRAPHS & CHARTS

Lumen Maintenance

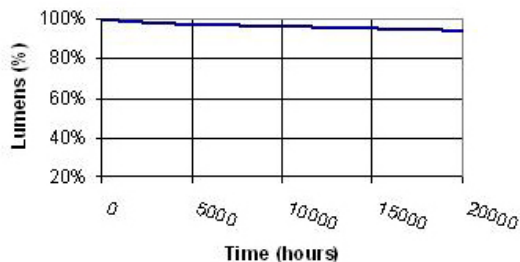

Lamp Mortality

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
	Linear
Bulb	T12
Base	Medium Bi-Pin (G13)
Wattage	40
Voltage	101
Rated Life	20000 hrs
Bulb Material	Soda lime
Starting Temperature	10 °C (50 °F)
LEED-EB MR Credit	80 picograms Hg per mean lumen hour
Additional Info	TCLP compliant
Primary Application	Kitchen & Bath

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	3400
Mean Lumens	3090
Nominal Initial Lumens per Watt	85
Color Temperature	3000 K
Color Rendering Index (CRI)	70

ELECTRICAL CHARACTERISTICS


Open Circuit Voltage (rapid start)	330 V
Open Circuit Voltage (rapid start) Min @ Temperature	256 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor	1.7

DIMENSIONS

Maximum Overall Length (MOL)	48.0000 in(1219.2 mm)
Minimum Overall Length	47.6700 in(1210.8 mm)
Nominal Length	48.000 in(1219.2 mm)
Bulb Diameter (DIA)	1.500 in(38.1 mm)
Bulb Diameter (DIA) (MIN)	1.410 in(35.8 mm)
Bulb Diameter (DIA) (MAX)	1.500 in(38.1 mm)
Max Base Face to Base Face (A)	47.220 in(1199.4 mm)
Face to End of Opposing Pin (B) (MIN)	47.400 in(1204.0 mm)
Face to End of Opposing Pin (B) (MAX)	47.500 in(1206.5 mm)
End of Base Pin to End of Opposite Pin End (C)	47.670 in(1210.8 mm)

PRODUCT INFORMATION

Product Code	21323
Description	F40KB/ECO 6PK
ANSI Code	1010-1
Standard Package	BUNDLE
Standard Package GTIN	00043168213233
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168980654

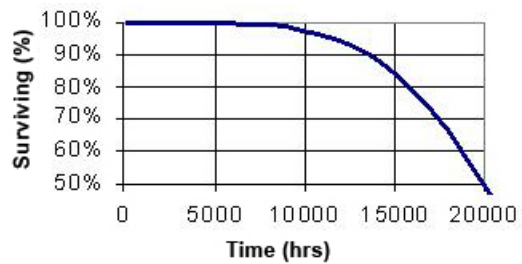

Lamp Mortality

