


**Presented By:** Candela Corporation  
 Contact Phone: (800) 922-9226  
 Contact E-mail: sales@candelacor.com

Customer Name:  
 Project Name:  
 Fixture Type:



GE  
 Lighting

**23075 - F60T12/CWHO 15PK**  
 GE Cool White T12

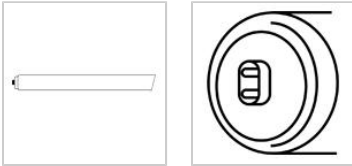

**CAUTIONS & WARNINGS**

**Caution**


- Lamp may shatter and cause injury if broken
  - Wear safety glasses and gloves when handling lamp.
  - Do not use excessive force when installing lamp.

**Warning**


- Risk of Electric Shock
  - Turn power off before inspection, installation or removal.

**GRAPHS & CHARTS**

**Spectral Power Distribution**

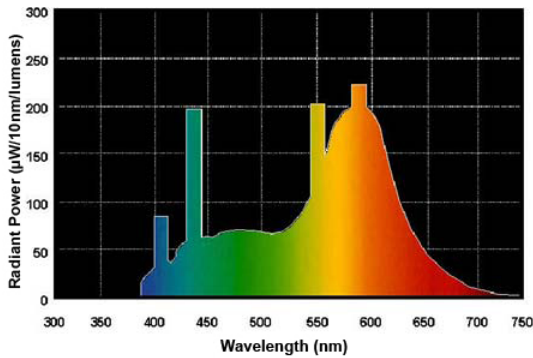

**Lamp Mortality**

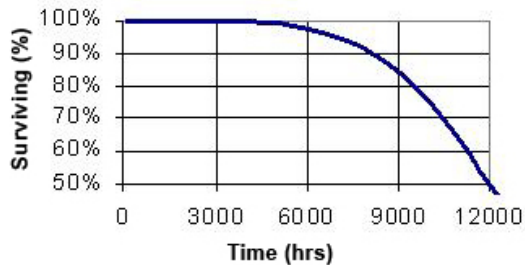

**GENERAL CHARACTERISTICS**

Lamp Type	Linear Fluorescent - Straight
	Linear
Bulb	T12
Base	Recessed Double Contact (R17d)
Wattage	75
Voltage	98
Rated Life	12000 hrs
Bulb Material	Soda lime
Starting Temperature	-29 °C (-20 °F)
LEED-EB MR Credit	1674 picograms Hg per mean lumen hour

**PHOTOMETRIC CHARACTERISTICS**

Initial Lumens	5150
Mean Lumens	4480
Nominal Initial Lumens per Watt	68
Color Temperature	4100 K
Color Rendering Index (CRI)	60

**ELECTRICAL CHARACTERISTICS**

Open Circuit Voltage (rapid start) Min @ Temperature	325 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor	1.7

**DIMENSIONS**

Maximum Overall Length (MOL)	57.9100 in(1470.9 mm)
Minimum Overall Length	57.7200 in(1466.1 mm)
Nominal Length	60.000 in(1524.0 mm)
Bulb Diameter (DIA)	1.500 in(38.1 mm)
Bulb Diameter (DIA) (MIN)	1.410 in(35.8 mm)
Bulb Diameter (DIA) (MAX)	1.500 in(38.1 mm)
End of Base Pin to End of Opposite Pin End (C)	57.720 in(1466.1 mm)

**PRODUCT INFORMATION**

Product Code	23075
Description	F60T12/CWHO 15PK
ANSI Code	1014-1
Standard Package	Case
Standard Package GTIN	10043168230756
Standard Package Quantity	15
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	15
UPC	043168230759