


PRODUCT FOCUS **XL SUPER T8 SERIES,
PREMIUM T8 & Watt Saver**
Linear Fluorescent Lamp

FB32T8/735 24,000 Hour (7) 6762751054 (0)*	FB32T8/741 24,000 Hour (7) 6762751055 (7)*	FB32T8/750 24,000 Hour (7) 6762751051 (9)*
FB32T8/835 24,000 Hour (7) 6762751052 (6)*	FB32T8/841 24,000 Hour (7) 6762751056 (4)*	FB32T8/850 24,000 Hour (7) 6762751057 (1)*

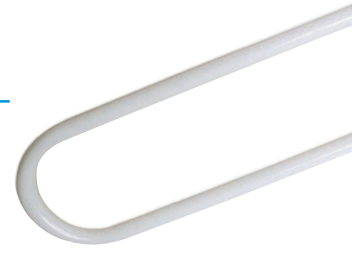

PREMIUM T8 SPECIFICATIONS

Watts	Order Code	Description	Lumens	Lamp Life (Hrs)	CRI	Case Pack	Cathode Guard	K
32	51054	FB32T8/735 T8 U-Bend'	2650	24,000▲	75	20	Y	3500
32	51055	FB32T8/741 T8 U-Bend'	2650	24,000▲	75	20	Y	4100
32	51051	FB32T8/750 T8 U-Bend'	2650	24,000▲	75	20	Y	5000
32	51052	FB32T8/835 T8 U-Bend'	2900	24,000▲	85	20	Y	3500
32	51056	FB32T8/841 T8 U-Bend'	2900	24,000▲	85	20	Y	4100
32	51057	FB32T8/850 T8 U-Bend'	2900	24,000▲	85	20	Y	5000

All specifications are subject to change without notice

SPECIAL NOTES	APPLICATIONS	LOCATIONS
<ul style="list-style-type: none"> >> System Warranty: System warranty is available on MaxLite Lamp and Ballast purchased together. Contact your local Sales Representative. >> ▲ 24,000 Hours on a 3 hr cycle; 30,000 Hours on a 12 hr cycle. 	<ul style="list-style-type: none"> • Industrial Lighting • Commercial Lighting • Residential Lighting 	<ul style="list-style-type: none"> • Office • Hotel/Motel • Schools/Hospital • Warehouse • Factory

BENEFITS	SPECIFICATIONS
<ul style="list-style-type: none"> • XL Super T8 & Premium Series: <ul style="list-style-type: none"> >> High lumen, Low mercury >> TCLP compliant <5mg> >> Finest blend of premium trichromatic rare earth phosphors • Watt Saver Series: <ul style="list-style-type: none"> >> For maximizing energy savings >> Low mercury - TCLP compliant 	<ul style="list-style-type: none"> • Ballast Type >> Electronic Ballast • Starting Method >> Instant Start • Input Line Voltage >> 120VAC • Input Line Frequency >> 50/60HZ • Minimum Starting Temp. >> 0°F • Max. Operating Temp. >> 100°F • Color Rendering Index >> 75/85

MAX10494-10