


4

3

DWG NO. 1000499 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

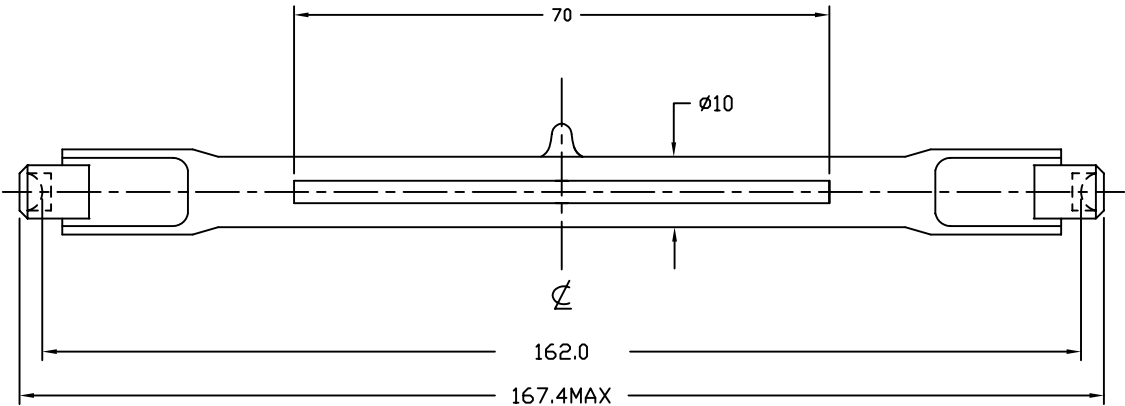

- NOTES:
1. ALL DIMENSIONS ARE IN MM.
 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	1500 W
LUMENS	41200 Lm
COLOR TEMP.	3200 K
BASE TYPE	R7S-15
AVERAGE LIFE	250 HRS
FILAMENT TYPE	C-8
BURN POSITION	Horizontal±4°

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630	
		APPROVALS	DATE		
		DRAWN R.AMPARO	12/17/99	TITLE FDB JP210V-1500WC	
		CHKD D.GILCZYNSKI	12/17/99		
		ENGR		SIZE B	
		MFG			
		QUAL		CODE IDENT NO. FDB	
		DSGN ACTVY			
		GOVT ACTVY		DWG NO. 1000499	
				SCALE NONE	
				WEIGHT	
				SHEET 1 OF 1	

MATERIAL
COMPOSITE

FINISH

NEXT ASSY
USED ON
APPLICATION