



LTR	REVISION	DATE	APPD
A	102814-PL01: UPDATED DWG.	10-28-14	GP



ACTUAL SIZE

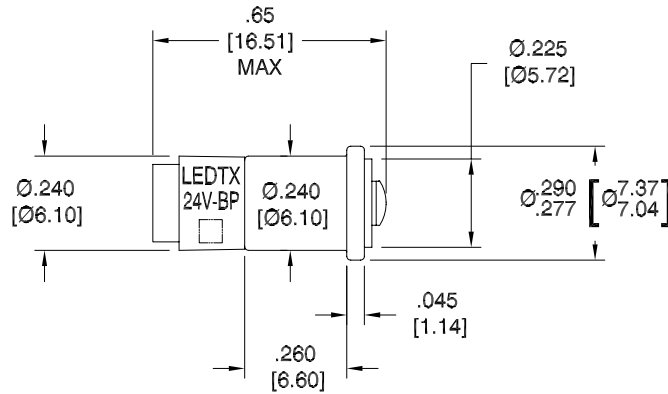

**NOTES:**

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: RYNITE FR530
3. BASE MATERIAL: SHELL, NICKEL PLATED BRASS
4. RIVET CAP MATERIAL: BRASS, GRADE B, .0005 THK.  
FINISH: NICKEL PLATE PER MIL SPEC MIL-C-26074
5. OPERATING TEMPERATURE: ~-30°C TO ~+50°C



REVISION NOTIFICATION	
<input type="checkbox"/>	DLC
<input type="checkbox"/>	UL/ETL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

**ELECTRICAL-OPTICAL CHARACTERISTICS (Ta = 25°C)**

FF200-0AG-024B	AQUA GREEN	24Vdc	0.36 W	0.016 A	0.960cd	518nm	-	110°
FF200-0CW-024B	COOL WHITE	24Vdc	0.36 W	0.015 A	0.825cd	-	8000K	100°
FF200-0UG-024B	SUPER GREEN	24Vdc	0.36 W	0.015 A	0.044cd	570nm	-	100°
FF200-0UR-024B	ULTRA RED	24Vdc	0.36 W	0.015 A	0.085cd	652nm	-	100°
FF200-0UY-024B	SUPER YELLOW	24Vdc	0.36 W	0.015 A	0.075cd	595nm	-	110°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λ.P nm	COLOR TEMP. (K)	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)

 23105 KASHIWA COURT TORRANCE, CA 90505	-PROPRIETARY- This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.		<b>TITLE</b> <b>FF200-0XX-024B</b>					
	.XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0°,30' FRACT. ± 1/32		DWG NO FF200-24V-BP	SCALE 2:1	SHEET 1 OF 1	DATE 10-31-07		
	CODE IDENT NO. 8Z410	DWG BY MM 10-31-07	CHK BY PL 10-28-14	QA	MFG	R&D		