


## FLUORESCENT LIGHTING

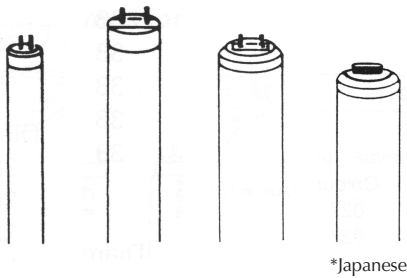

**Fluorescent Lamps**

Cat. No.	Watts	Color	Length Excl. Pins	Diam.
125106	4	white	136	16
125132	6	white	212	16
125133	6	33	212	16
125158	8	white	288	16
125160	8	33	288	16
125202	10	white	329	26
125228	13	white	516	16
125254	14	white	360	26
125280	15	white	437	26
125286	15	827	437	26
125292	15	830	437	26
125324	18	33	590	26
125330	18	54	590	26
125336	18	827	590	26
125342	18	830	590	26
125348	18	840	590	26
125406	18	red	590	26
125380	20	daylight	580*	32
125454	30	cool white	630*	32
125490	36	33	1200	26
125496	36	54	1200	26
125502	36	827	1200	26
125546	40	white	590	38
125578	58	33	1500	26
125581	58	54	1500	26
125590	58	840	1500	26
125604	60	white	1166	38


\*Japanese

\*Japanese




**Fluorescent Lamps, Rapid Start Color White (33)**

Cat. No.	Watts	Length Excl. Pins		Diam.
125650	20	580	Japanese	32
125662	20	590	TL'M' RS	38
125666	20	590	TL'RS'	38
125698	40	1200	TL'M' RS	38
125704	40	1200	TL'RS'	38
125710	40	1184	TL'S' cap R18s	38
125720	65	1500	TL'M' RS	38




**'Circline' Fluorescent Lamps Color White (33), G10Q Base**

Cat. No.	Watts	Lamp Diam.	Diam.
125806	20	205	29
125814	22	216	28
125822	30	229	32
125830	32	311	32
125838	40	413	32

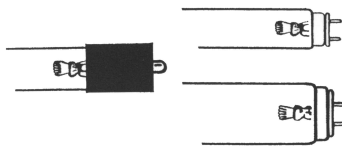


**UV Lamps for Sterilization Purposes (Germicidal)**

Cat. No.	Watts	Length Excl. Pins	Diam.	Color	Pins
125956	8	288	16	Clear	2
125962	10	330	25		2
125968	15	437	25		2
125978	30	892	25		2
125992	36	840	19	G36 T6	1




**Single Pin Instant Start Safety Fluorescent Lamps Type TL'X', Color White (33)**

Cat. No.	Watts	Length	Diam.
125850	20	571	38
125862	40	1180	38



**Shades for Fluorescent Fittings**

Cat. No.	L	W	H	For Fitting
126580	675	142	68	126392 2x18 clear
126666	1291	140	70	126677 2x36 clear

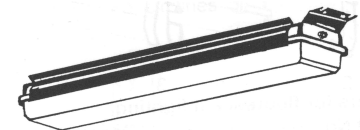

**Watertight Lighting Fittings IP 65/67 220V 60 Hz Stainless Steel**


Cat. No.	Watts	Length	Width	Height
126392	2x18	838	165	123
126677	2x36	1334	165	128

## EXPLOSION-PROOF LIGHT FIXTURES

Ex-protected light fittings.

Explosion category: Ex s edm IIC T4 for Zone 1, Zone 2 and Zone II acc. to VDE 0165.

For regular Bi-pin FL tubes.

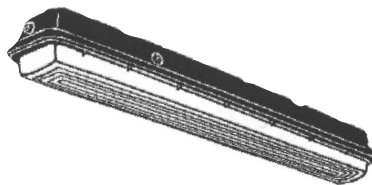

Cat. No.	Description
765101	Shade (2x18 W) for Cat. No. 765120
765103	Shade (2x36 W) for Cat. No. 765122
765120	110-254 V 47-63 Hz and 220V DC 2x18 W G13 base
765122	110-254 V 47-63 Hz and 220V DC 2x36 W G13 base

**Kerger Marine Electric, Inc.**  
 4350 South Wayside Drive, Suite 104  
 Houston, TX 77087  
 Phone: (713) 643-3326  
 Fax: (713) 643-6683  
 (800) 328-3670  
 E-mail: saleshouston@kerger.com

We stock a complete line of European & Japanese marine electrical spare parts, including **Glamox MIR and CEAG Lighting Fixtures**  
 Visit our Website for more information: [www.kerger.com](http://www.kerger.com)  
**SOLE AGENTS FOR "MERKUR" NAVIGATION LAMPS**

**Head Office: Kerger & Co. B.V.**  
 Fokkerstraat 515  
 3125 BD Schiedam  
 The Netherlands  
 Phone: 31-104374500  
 Fax: 31-104376825  
 E-mail: sales@kerger.nl