


4

3

DWG NO. 1000556 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

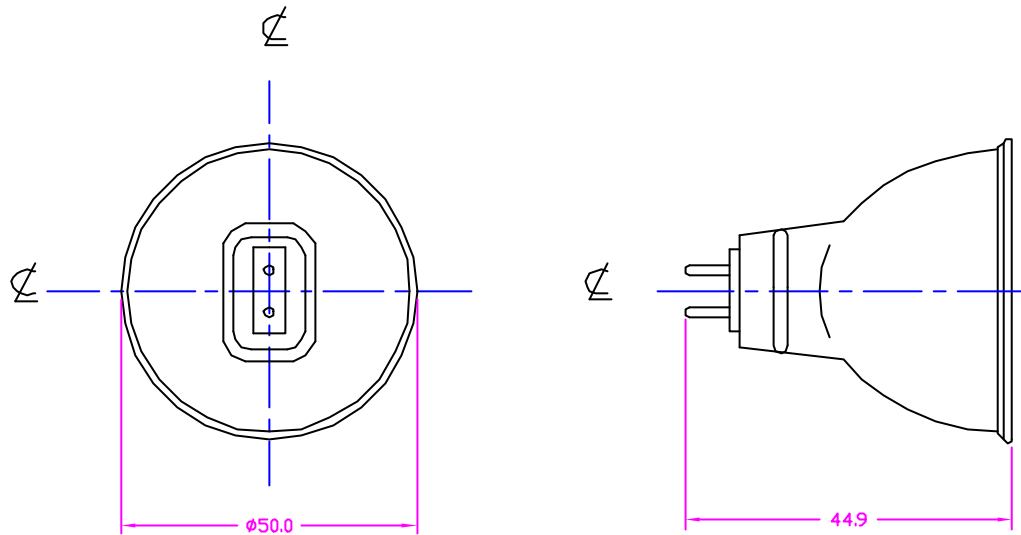

- NOTES:
1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10307 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		
			APPROVALS		
			DATE		
			DRAWN R.AMPARO 09/07/99		
			CHKD D.GILCZYNSKI 09/07/99		
MATERIAL COMPOSITE			ENGR		
			MFG		
			QUAL		
FINISH			DSGN ACTVY		
			GOVT ACTVY		
			TITLE		
			USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630		
			FMV/C/A HALOGEN LAMP		
			SIZE B	CODE IDENT NO. FMV	DWG NO. 1000556
			SCALE NONE	WEIGHT	SHEET 1 OF 1

CHARACTERISTICS	
VOLTAGE	12 V
WATTAGE	35 W
COLOR TEMP	2950 K
AVERAGE LIFE	3500 HRS
BASE TYPE	GU5.3
BEAM ANGLE	24°
FILAMENT TYPE	C-8
BURN POSITION	Any

NEXT ASSY	USED ON
	APPLICATION

4

3

2

1

CAD