


4

3

DWG NO. 1000588 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

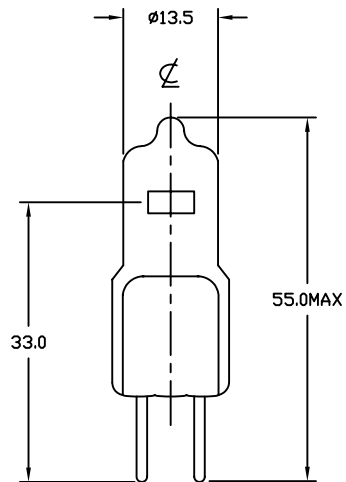

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	24 V
WATTAGE	275 W
TOTAL LUMEN	10000 Lm
COLOR TEMP.	3400 K
BASE TYPE	G5.3
AVERAGE LIFE	75 HRS
FILAMENT TYPE	CBar6
BURN POSITION	BD/Hor

NEXT ASSY	USED ON

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630	
DECIMALS .X ± - .XX ± - .XXX ± -		APPROVALS			
ANGLES ± -		DATE		TITLE FNT JC24V-275W	
DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		DRAWN R.AMPARO 08/20/99			
MATERIAL COMPOSITE		CHKD D.GILCZYNSKI 08/20/99		SIZE B CODE IDENT NO. FNT DWG NO. 1000588	
FINISH		ENGR			
		MFG		SCALE NONE WEIGHT SHEET 1 OF 1	
		QUAL			
		DSGN ACTVY		CAD	
		GOVT ACTVY			

4

3

2

1

CAD