



## ServiceMaster Transformer

**FRANCE**  
LIGHTING SOLUTIONS

**P5G-2UE**



### ADVANTAGES

#### True 30mA & 60mA Output

The ServiceMaster can replace 8 ratings.

#### Diagnostic Circuit

LED Indicates the reason for service, allowing for quick, easy troubleshooting.

**Primary Wiring Requirements of a Non-SCGFP** with the added safety of Secondary Circuit Ground Fault Protection.

#### Secondary Circuit Ground Fault Protection

Unit is disabled upon detection of arcs to ground in compliance with UL2161, C22.2 No. 255 and NEC requirements.

**Service Button** overrides the SCGFP for up to 30 minutes or easy troubleshooting of ground faults and primary wiring problems.

**Auto Reset** three times within ten seconds after secondary ground fault. Manual reset possible at any time.

#### Easy wiring and mounting

Step Plate eliminates double-nutting. Adapts to most grounding situations. Virtual Ground and Series Wiring Methods.

### MODELS

#### 15030 P5G-2UE

Secondary Output: 15kV, 30mA

**Model Number: 38823**

#### 9030 P5G-2UE

Secondary Output: 9kV, 30mA

**Model Number: 38824**

#### 15060 P5G-2UE

Secondary Output: 15kV, 60mA

**Model Number: 68636**

#### 9060 P5G-2UE

Secondary Output: 9kV, 60mA

**Model Number: 38825**

#### 15030 P5G-2UE 277

Secondary Output: 15kV, 30mA

**Model Number: 38826**

#### 9030 P5G-2UE 277

Secondary Output: 9kV, 30mA

**Model Number: 38827**

#### 15060 P5G-2UE 277

Secondary Output: 15kV, 60mA


**Model Number: 68637**

#### 9060 P5G-2UE 277

Secondary Output: 9kV, 60mA

**Model Number: 38828**

| NORMAL POWER FACTOR |     |    |           |    |            |            |              |                          |      |      |       |       |      |
|---------------------|-----|----|-----------|----|------------|------------|--------------|--------------------------|------|------|-------|-------|------|
| Catalog Number      | VAC | Hz | Secondary |    | Primary VA | Input Amps | Weight (lbs) | Case Dimensions (inches) |      |      |       |       |      |
|                     |     |    | Volts     | mA |            |            |              | L                        | W    | H    | A     | B     | C    |
| 15030 P5G-2UE       | 120 | 60 | 15000     | 30 | 510        | 4.25       | 21           | 9.20                     | 4.65 | 5.71 | 10.13 | 11.25 | 3.00 |
| 9030 P5G-2UE        | 120 | 60 | 9000      | 30 | 330        | 2.75       | 13           | 8.37                     | 3.70 | 5.39 | 9.00  | 10.00 | 2.00 |
| 15060 P5G-2UE       | 120 | 60 | 15000     | 60 | 530        | 1.90       | 21           | 9.20                     | 4.65 | 5.71 | 10.13 | 11.25 | 3.00 |
| 9060 P5G-2UE        | 120 | 60 | 9000      | 60 | 320        | 1.15       | 13           | 8.37                     | 3.70 | 5.39 | 9.00  | 10.00 | 2.00 |
| 15030 P5G-2UE 277   | 277 | 60 | 15000     | 30 | 940        | 7.80       | 39           | 10.87                    | 5.37 | 6.20 | 11.88 | 13.00 | 3.00 |
| 9030 P5G-2UE 277    | 277 | 60 | 9000      | 30 | 600        | 5.00       | 23           | 9.20                     | 4.65 | 5.71 | 10.13 | 11.25 | 3.00 |
| 15060 P5G-2UE 277   | 277 | 60 | 15000     | 60 | 980        | 3.60       | 39           | 10.87                    | 5.37 | 6.20 | 11.88 | 13.00 | 3.00 |
| 9060 P5G-2UE 277    | 277 | 60 | 9000      | 60 | 610        | 2.20       | 23           | 9.20                     | 4.65 | 5.71 | 10.13 | 11.25 | 3.00 |

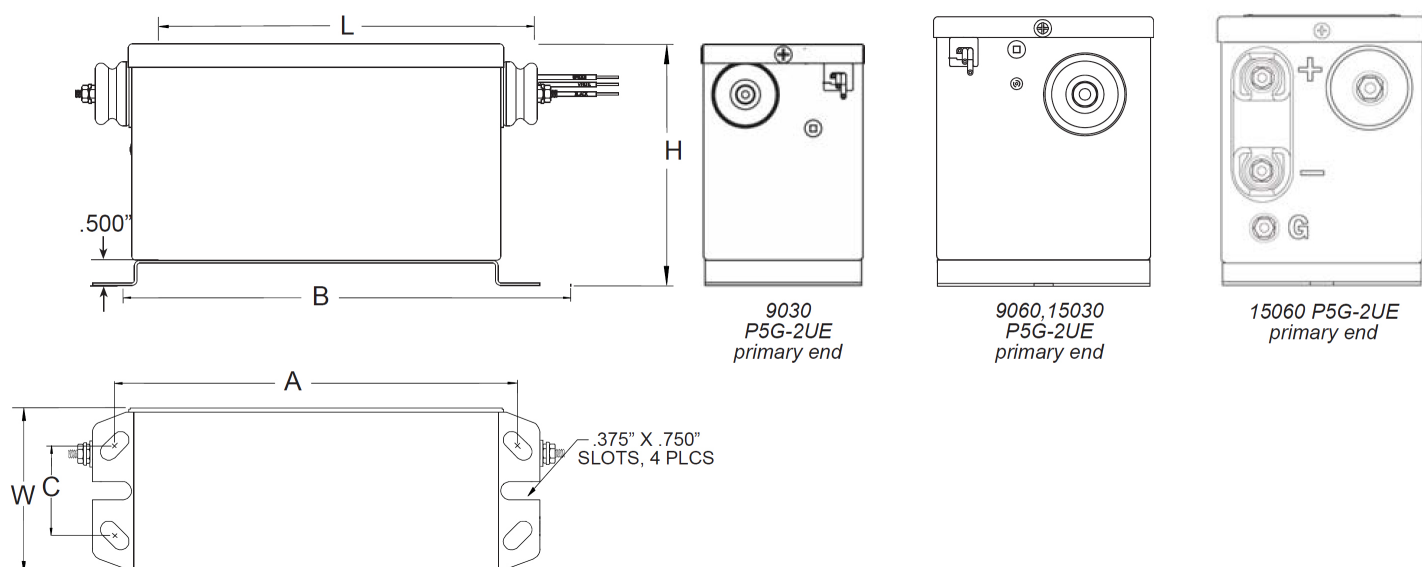

| SERVICEMASTER MODEL | MODELS REPLACED                                |
|---------------------|------------------------------------------------|
| 15030 & 15060       | 1500, 1200, 10500 Volt                         |
| 9030 & 9060         | 9000, 75000, 6000, 5000, 4000, 3000, 2000 Volt |