

# Products

## Lamp



model number  
**FRT 1000 EN**  
1 2

### 1 LENGTH

- 500 = 495mm (19 1/2")
- 850 = 845mm (33 1/4")
- 1000 = 995mm (39 3/16")
- 1250 = 1245mm (49")
- 1500 = 1495mm (58 7/8")


### 2 COLOR TEMPERATURE

- EL25 = 2500K
- EL28 = 2800K
- EL30 = 3000K
- EW = 3500K
- EW = 4200K
- EN = 5000K
- ED = 6700K

CRI : 88  
 Average rated life : 20,000 hours  
 Mercury content < 5mg


## COLOR TEMPERATURE

- EL25 = 2500K
- EL28 = 2800K
- EL30 = 3000K
- EW = 3500K
- EW = 4200K
- EN = 5000K
- ED = 6700K

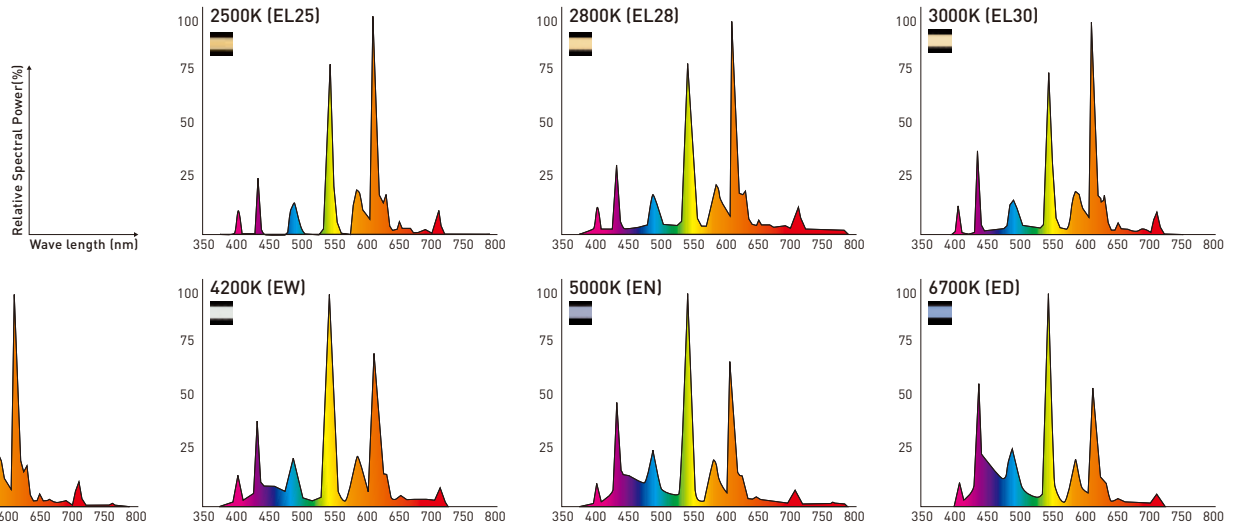

## ACCESSORIES


### POWER FEED BOX SF



### I-COUPLING SCI




### L-COUPLING SCL T-COUPLING SCT X-COUPLING SCX



### DC to PWM Converter Unit

This unit can operate up to 20 fixtures by one unit with 0-10Vdc signal from Dimming control unit.

- UFDA-035AP 120volts,90mA
- UFDC-035AP 277volts,40mA

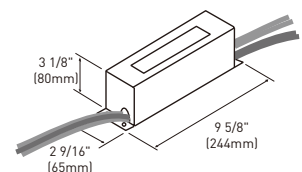

Phone 877-NIPPO11 (647-7611)

www.NIPPO-web.com/us

Verbatim Americas, LLC 8210 University Executive Park Drive Suite 300 Charlotte, NC 28262