

**SCM SLIM CANOPY 10"x10"**

PROJECT: \_\_\_\_\_

SCHEDULE: \_\_\_\_\_ DATE: \_\_\_\_\_

PREPARE BY: \_\_\_\_\_

NOTES: \_\_\_\_\_

**DESCRIPTION**

naturaLED® SCM IP65 rated fixtures come in an aesthetically pleasing construction, low-profile design with die-cast aluminum housing and shatter-resistant polycarbonate prismatic lens. In addition, they are dust-proof and include 1/2" threaded conduit entrances on each side. The SCM fixtures are available with or without a microwave occupancy sensor mounted behind the lens. This sensor has multiple settings that can be selected via a dip switch. The settings on the sensor include: step dimming, area sensitivity, standby time and on/off. The SCM supports both pendant mounting and direct surface mounting ceiling or wall. Pendant mounting accepts a 3/4" NPT thread and can be mounted to multiple types of J-boxes.



**Rated Life 50,000 Hours  
Warranty 5 Years**

**APPLICATIONS**

Warehouses, Parking Garages, Offices, Factories, Hospitals, Hotels

**FEATURES**

- DLC Premium Qualified
- IP65 Rated
- ETL Listed
- Long life LED chips
- ColorTemp: 4000K, 5000K
- Dimmable: 1-10V
- Input line voltage: 120-277V
- CRI: 80
- Powerfactor >0.9
- Beam Angle: 160°
- Emergency driver compatible as optional accessories
- Material: aluminum die-cast
- Operating temperature: -22°F - 122°F
- 5 Year Warranty
- Finish: Black /White

**ACCESSORIES**

	Emergency Driver
	Motion Sensor
	Beauty Plate
	Drop Lens
	Frosted Lens
	Surge Protector
	Photocell

**SAMPLE NUMBER FX10SCM28/840/BK-SEN**

FAMILY	SIZE	SERIES	WATTAGE	CRI/COLOR TEMP	COLOR	ACCESSORY
FX fixture	10 10 inch	SCM slim canopy	28 28 watt	840 CRI 80 4000K	BK Black (WH) White	SEN Motion Sensor none N/A



# SLIM CANOPY 10X10

## CEILING & AREA LUMINAIRES

### ORDERING

\*P= Premium DLC / \*S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Dim (V)	Color	Sensor	IP65 Rated	DLC (S/P)
28	<b>9432</b>	FX10SCM28/840/BK-SEN	4000K	3,540	150	1-10V	Black	•	•	P
28	<b>9433</b>	FX10SCM28/850/BK-SEN	5000K	3,746	150	1-10V	Black	•	•	P
42	<b>9434</b>	FX10SCM42/840/BK-SEN	4000K	5,517	175	1-10V	Black	•	•	P
42	<b>9435</b>	FX10SCM42/850/BK-SEN	5000K	5,638	175	1-10V	Black	•	•	P
59	<b>9436</b>	FX10SCM59/840/BK-SEN	4000K	7,695	250	1-10V	Black	•	•	P
59	<b>9437</b>	FX10SCM59/850/BK-SEN	5000K	7,845	250	1-10V	Black	•	•	P
28	<b>9457</b>	FX10SCM28/850/WH-SEN	5000K	3,746	150	1-10V	White	•	•	P
42	<b>9458</b>	FX10SCM42/850/WH-SEN	5000K	5,638	175	1-10V	White	•	•	P
59	<b>9459</b>	FX10SCM59/850/WH-SEN	5000K	7,845	250	1-10V	White	•	•	P
28	<b>9414</b>	FX10SCM28/840/BK	4000K	3,540	150	1-10V	Black	-	•	P
28	<b>9415</b>	FX10SCM28/850/BK	5000K	3,746	150	1-10V	Black	-	•	P
42	<b>9418</b>	FX10SCM42/840/BK	4000K	5,517	175	1-10V	Black	-	•	P
42	<b>9419</b>	FX10SCM42/850/BK	5000K	5,638	175	1-10V	Black	-	•	P
59	<b>9422</b>	FX10SCM59/840/BK	4000K	7,695	250	1-10V	Black	-	•	P
59	<b>9423</b>	FX10SCM59/850/BK	5000K	7,845	250	1-10V	Black	-	•	P
28	<b>9416</b>	FX10SCM28/840/WH	4000K	3,540	150	1-10V	White	-	•	P
28	<b>9417</b>	FX10SCM28/850/WH	5000K	3,746	150	1-10V	White	-	•	P
42	<b>9420</b>	FX10SCM42/840/WH	4000K	5,517	175	1-10V	White	-	•	P
42	<b>9421</b>	FX10SCM42/850/WH	5000K	5,638	175	1-10V	White	-	•	P
59	<b>9424</b>	FX10SCM59/840/WH	4000K	7,695	250	1-10V	White	-	•	P
59	<b>9425</b>	FX10SCM59/850/WH	5000K	7,845	250	1-10V	White	-	•	P

### ACCESSORIES (Ordered Separately)



**Motion Sensor**  
P10234 SEN-MC605V-D  
(Microwave Motion Sensor 0-10V)



**Emergency Driver**  
7336 BAEM4-60BC/MV-A  
(Emergency Driver for 28W, 38W)



**Drop Lens**  
P10126 LENS-SCM/DR9X9  
(Drop Lens for SCM 28W, 42W, 59W)



**Photocell**  
P10036 SEN-PHO-BT-MT/MV  
(Button Photocell 120V-277)



**Beauty Plates**  
P10195 PLT-SCM/14X14/WH  
(14"x14" Beauty Plate used with SCM)  
P10196 PLT-SCM/24X24/WH  
(24"x24" Beauty Plate used with SCM)



**Frosted Lens**  
P10125 LENS-SCM/FR9X9  
(Frosted Lens for SCM 28W, 42W, 59W)



**Surge Protector**  
P10389 SPD-L-10KV-277  
(Surge Protection 10KV 120-277V)




**Surge Protector**  
P10390 SPD-L-20KV-277  
(Surge Protection 20KV 120-277V)



**Surge Protector**  
P10391 SPD-L-20KV-480  
(Surge Protection 20KV 347-480V)


DIMENSIONS

28W 4.50-lbs  
42W 5.10-lbs  
59W 5.10-lbs

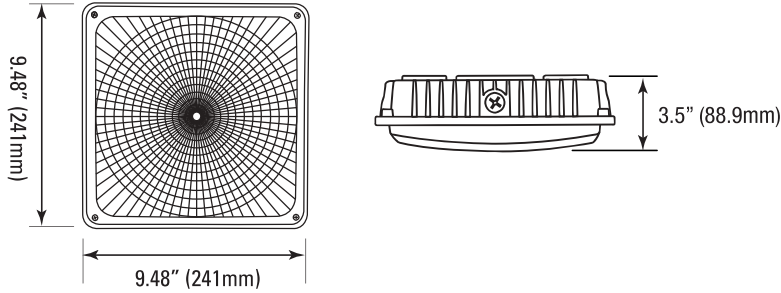


PHOTOMETRICS CHART


28 Watt  
DLC Premium

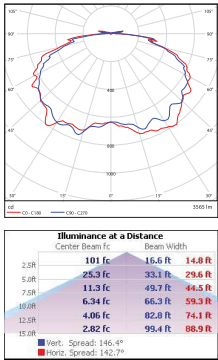


42 Watt  
DLC Premium

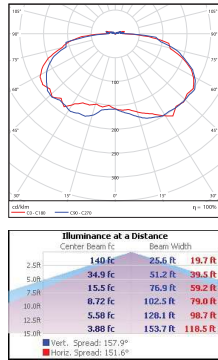


59 Watt  
DLC Premium

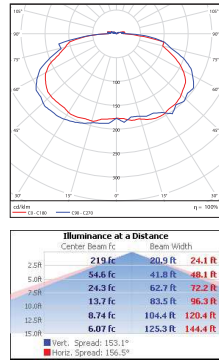


28 Watt with sensor  
DLC Premium

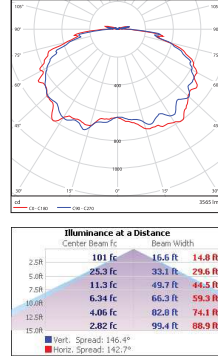

42 Watt with sensor  
DLC Premium

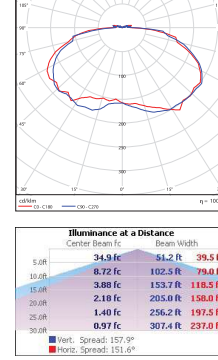

59 Watt with sensor  
DLC Premium

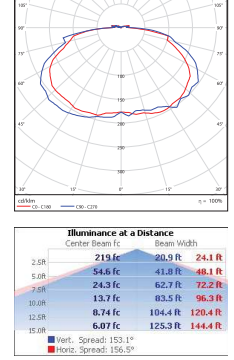

PACKAGE

Case Qty 1 pc

