


Version		Date	
Prepared By			

PRODUCT SPECIFICATION	
Category	LED Backlit Panel
Item Number	7527
Stock Code	FXPNL46SW/2X4/8CCT3
Mounting	Recessed
Housing Color	White

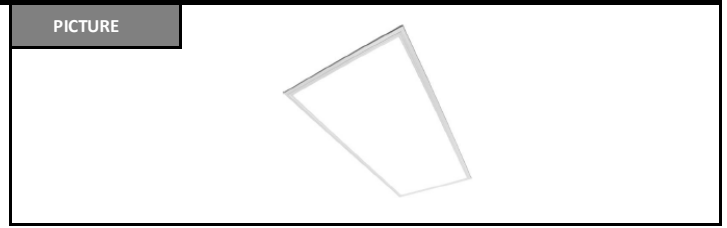

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	46/39/28	Replacement Wattage (W)	
Tested Wattage (W)	46/39/28		
Input Voltage (V)	120-277		
Voltage Frequency (Hz)	50/60	Surge Protect Level	4KV
Input Current (A)	max.0.44 (@120V)	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	NO
THD			

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	5280/4750/3483	CCT (K)	3500/4000/5000
Efficacy (lm/w)	>110	Beam Angle (°)	115
CRI	80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-4°F~104°F(-20°C~40°C)
Storage Temperature (°F)	-4°F~176°F(-20°C~80°C)
IP Rating	DAMP Location
Rated Life	50000 hrs
Warranty	5 years

ACCESSORIES		
Item #	Stock Code	Description

PRODUCT DIMENSIONS			
Width- in (mm)	47.72	1212.09	
Height- in (mm)	1.71	43.43	
Length- in (mm)	23.74	603.00	
EPA (ft²)			
Weight (lbs)	9.48		
Mounting Height (ft)			
Cable Length (ft)			

CERTIFICATIONS			
UL/ETL	ETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	✓	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS