

TWP TRADITIONAL WALL PACK CCT 3

DESCRIPTION

naturaLED® TWP traditional wallpack comes in rugged cast-aluminum housing with excellent thermal design. DLC Premium qualified, our TWP product offers a popular classic appearance for your needs. The traditional shape maintains an aesthetic appearance and will replace any building's wallpack or perimeter lighting. Ideal for outdoor applications such as carports, loading areas, driveways, parking area and pathways. Designed for wall mounting above four feet from ground. New available in Wattage Selectable and Color Temperature Selectable option. *Requires an easy installation using the connectors to activate photocell sensor.

APPLICATIONS

Security, Pathway, Perimeter, Entryway, Area Lighting, and building facades

FEATURES

- DLC Premium Qualified
- IP65 Rated
- ETL Listed
- Built In Photocell Sensor Included (Easy connector to activate the photocell)
- ColorTemp: 4000K, 5000K or CCT3
- Dimmable: 0-10V /1-10V (28W)
- Input line voltage: 120-277V
- Input Current: 28W-0.24A, 38W-0.32A, 60W-0.50A, 80W-0.67A, 100W-0.50A
- Surge Protect Level: 4KV
- Emergency driver and microwave sensor compatible as optional accessories
- Wireguard and replacement lens
- Material: Die Cast Aluminum
- Lens: Borosilicate Glass Lens
- Corrosion resistant powder coating
- Operating temperature: -22°F - 122°F
- 5Year Warranty
- Finish: Bronze

| | |
|-------------|-------|
| PROJECT: | |
| SCHEDULE: | DATE: |
| PREPARE BY: | |
| NOTES: | |



Rated Life 50,000 Hours
Warranty 5 Years

ACCESSORIES

| | |
|--|-------------------|
| | Motion Sensor |
| | Emergency Drivers |
| | Wireguard |
| | Replacement Lens |
| | Shield Cover |
| | Surge Protection |

SAMPLE NUMBER FXTWP60SW/CCT3/BZ-PHO

| FAMILY | SERIES | WATTAGE | SELECTABLE | COLOR TEMP | FINISH COLOR | ACCESSORY |
|---------------|-----------------------------|-----------------|--------------------------|---------------------------------|--------------|---------------------------|
| FX Fixture | TWP Traditional Wallpack | 60 28/38/60W | SW Selectable Wattage | CCT3 3000K 4000K 5000K | BZ Bronze | PHO Photocell Included |



TRADITIONAL WALL PACK & CCT 3

WALL & AREA LUMINAIRES

ORDERING

*P= Premium DLC / *S = Standard DLC

| Watts (W) | Ordering Code | Description | CCT (K) | Lumens (Lm) | Equiv. Wattage (W) | Dim (V) | IP65 Rated | DLC (S/P) |
|-----------|---------------|------------------------|-----------|-------------|--------------------|---------|------------|-----------|
| 28 | 9453 | FXTWP28/40K/BZ-PHO | 4000K | 4,128 | 175 | 1-10V | • | P |
| 28 | 9454 | FXTWP28/50K/BZ-PHO | 5000K | 4,189 | 175 | 1-10V | • | P |
| 38 | 9447 | FXTWP38/40K/BZ-PHO | 4000K | 5,700 | 175-250 | 0-10V | • | P |
| 38 | 9448 | FXTWP38/50K/BZ-PHO | 5000K | 5,700 | 175-250 | 0-10V | • | P |
| 60 | 9449 | FXTWP60/40K/BZ-PHO | 4000K | 9,000 | 250-400 | 0-10V | • | P |
| 60 | 9450 | FXTWP60/50K/BZ-PHO | 5000K | 9,000 | 250-400 | 0-10V | • | P |
| 80 | 9451 | FXTWP80/40K/BZ-PHO | 4000K | 12,000 | 400- 575 | 0-10V | • | P |
| 80 | 9452 | FXTWP80/50K/BZ-PHO | 5000K | 12,000 | 400-575 | 0-10V | • | P |
| 28 | 9455 | FXTWP60SW/CCT3/BZ-PHO | 3/4/5000K | 4,404 | 175-400 | 0-10V | • | P |
| 38 | | | 3/4/5000K | 6,260 | 175-400 | 0-10V | • | P |
| 60 | | | 3/4/5000K | 9,134 | 175-400 | 0-10V | • | P |
| 60 | 9456 | FXTWP100SW/CCT3/BZ-PHO | 3/4/5000K | 9,065 | 400-750 | 0-10V | • | P |
| 80 | | | 3/4/5000K | 11,260 | 400-750 | 0-10V | • | P |
| 100 | | | 3/4/5000K | 14,500 | 400-750 | 0-10V | • | P |

ACCESSORIES (Ordered Separately)



Motion Sensor

P10234 SEN-MC605V-D

(Microwave Motion Sensor 0-10V)



Replacement Glass Lens

P10002 LENS-TWP-SMALL

(Glass Lens Gasket for 28W)



Wireguard

P10004 WG-TWP-MEDIUM

(Wireguard for medium 38W,60W,80W,100W,CCT3)



Replacement Glass Lens

P10000 LENS-TWP-MEDIUM

(Glass Lens Gasket for 38-100W, CCT3)



Emergency Driver

7334 BAEM15-48BC/MV-A

(Emergency Driver for 38W, 60W, 80W, CCT3)



Replacement PC Lens

P10003 LENS-TWP-PC-MEDIUM

(Plastic Lens Gasket for 38-100W, CCT3)



Emergency Driver

7336 BAEM4-60BC/MV-A

(Emergency Driver for 28W, 38W)



Surge Protection

P10389 SPD-L-10KV-277

(Surge Protection 10KV 120-277V)



Shield

P10402 CVR-TWP-small/BZ

(Shield cover- small 28W Bronze)



Surge Protection

P10390 SPD-L-20KV-277

(Surge Protection 20KV 120-277V)



Shield

P10403 CVR-TWP-medium/BZ

(Shield cover- medium 38-100W Bronze)




Surge Protection

P10391 SPD-L-20KV-480

(Surge Protection 20KV 347-480V)

DIMENSIONS


28W
5.51-lbs

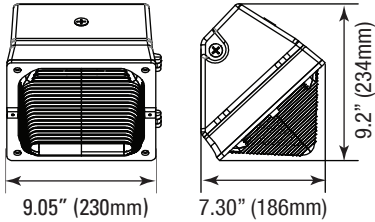

38W
6.79-lbs


60W
6.86-lbs

CCT3 60W
6.86-lbs

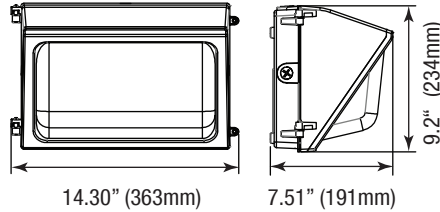


80W
8.07-lbs

CCT3 100W
9.26-lbs

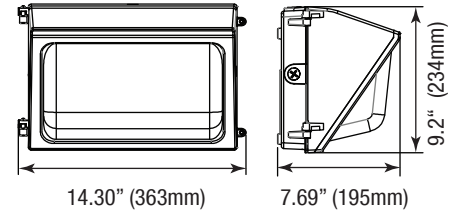

PHOTOMETRICS CHART


28 Watt
DLC Premium



| Center Beam fc | Beam Width |
|----------------|-----------------------|
| 2.5R | 136 fc 7.8 R 11.7 R |
| 5.0R | 34.0 fc 13.6 R 23.4 R |
| 7.5R | 15.1 fc 23.5 R 35.1 R |
| 10.0R | 8.50 fc 31.3 R 46.8 R |
| 12.5R | 5.44 fc 39.1 R 58.5 R |
| 15.0R | 3.78 fc 46.9 R 70.3 R |

Vert. Spread: 114.8°
Horiz. Spread: 133.8°


38 Watt
DLC Premium



| Center Beam fc | Beam Width |
|----------------|-----------------------|
| 2.5R | 182 fc 6.5 R 7.2 R |
| 5.0R | 45.4 fc 12.9 R 14.4 R |
| 7.5R | 20.2 fc 18.4 R 21.5 R |
| 10.0R | 11.3 fc 25.9 R 28.7 R |
| 12.5R | 7.26 fc 32.4 R 35.9 R |
| 15.0R | 5.04 fc 38.8 R 43.1 R |

Vert. Spread: 110.4°
Horiz. Spread: 110.3°


60 Watt
DLC Premium



| Center Beam fc | Beam Width |
|----------------|-----------------------|
| 2.5R | 284 fc 5.3 R 5.9 R |
| 5.0R | 71.1 fc 12.7 R 11.8 R |
| 7.5R | 31.6 fc 18.0 R 17.6 R |
| 10.0R | 17.8 fc 25.3 R 23.5 R |
| 12.5R | 11.4 fc 31.7 R 29.4 R |
| 15.0R | 7.90 fc 38.0 R 35.3 R |

Vert. Spread: 103.4°
Horiz. Spread: 99.2°


80 Watt
DLC Premium



| Center Beam fc | Beam Width |
|----------------|------------------------|
| 2.5R | 436 fc 6.8 R 5.8 R |
| 5.0R | 109.5 fc 13.6 R 11.6 R |
| 7.5R | 48.5 fc 20.5 R 17.4 R |
| 10.0R | 27.3 fc 27.3 R 23.2 R |
| 12.5R | 17.5 fc 34.1 R 29.0 R |
| 15.0R | 12.1 fc 40.9 R 34.8 R |

Vert. Spread: 107.5°
Horiz. Spread: 98.5°


28/38/60 Watt (CCT)
DLC Premium



| Center Beam fc | Beam Width |
|----------------|-----------------------|
| 2.5R | 254 fc 6.8 R 7.0 R |
| 5.0R | 63.4 fc 13.6 R 13.9 R |
| 7.5R | 28.2 fc 20.4 R 20.9 R |
| 10.0R | 15.8 fc 27.2 R 27.9 R |
| 12.5R | 10.1 fc 34.0 R 34.8 R |
| 15.0R | 7.04 fc 40.7 R 41.8 R |

Vert. Spread: 107.3°
Horiz. Spread: 108.7°

60/80/100 Watt (CCT)
DLC Premium



| Center Beam fc | Beam Width |
|----------------|-----------------------|
| 2.5R | 548 fc 6.9 R 6.5 R |
| 5.0R | 137 fc 13.9 R 13.0 R |
| 7.5R | 60.9 fc 20.8 R 19.5 R |
| 10.0R | 34.3 fc 27.8 R 26.0 R |
| 12.5R | 21.9 fc 34.7 R 32.5 R |
| 15.0R | 15.2 fc 41.7 R 39.0 R |

Vert. Spread: 108.5°
Horiz. Spread: 104.9°

PACKAGE

Case Qty 1 pc

