

TWP TRADITIONAL WALL PACK CCT 3

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® TWP traditional wallpack comes in rugged cast-aluminum housing with excellent thermal design. DLC Premium qualified, our TWP product offers a popular classic appearance for your needs. The traditional shape maintains an aesthetic appearance and will replace any building's wallpack or perimeter lighting. Ideal for outdoor applications such as carports, loading areas, driveways, parking area and pathways. Designed for wall mounting above four feet from ground. New available in Wattage Selectable and Color Temperature Selectable option. *Requires an easy installation using the connectors to activate photocell sensor.

APPLICATIONS

Security, Pathway, Perimeter, Entryway, Area Lighting, and building facades



FEATURES

- DLC Premium Qualified
- IP65 Rated
- ETL Listed
- Built In Photocell Sensor Included (Easy connector to activate the photocell)
- ColorTemp: 4000K, 5000K or CCT3
- Dimmable: 0-10V /1-10V (28W)
- Input line voltage: 120-277V, 120-347V
- Input Current: 28W-0.24A, 38W-0.32A, 60W-0.50A, 80W-0.67A, 100W-0.50A
- Surge Protect Level: 4KV
- Material: Die Cast Aluminum
- Lens: Borosilicate Glass Lens
- Corrosion resistant powder coating
- Operating temperature: -40°F - 122°F
- 5 Year Warranty
- Finish: Bronze
- Optional for Purchase: Motion Sensor, Emergency Driver, Wireguard, Replacement Lens, Shield Cover, Surge Protection

ACCESSORIES

| | |
|--|-------------------|
| | Motion Sensor |
| | Emergency Drivers |
| | Wireguard |
| | Replacement Lens |
| | Shield Cover |
| | Surge Protection |

SAMPLE NUMBER FXTWP60SW/CCT3/BZ-PHO

| FAMILY | SERIES | WATTAGE | SELECTABLE | COLOR TEMP | FINISH COLOR | ACCESSORY |
|---------------|-----------------------------|-----------------|--------------------------|---------------------------------|--------------|---------------------------|
| FX fixture | TWP traditional wallpack | 60 28/38/60W | SW selectable wattage | CCT3 3000K 4000K 5000K | BZ Bronze | PHO Photocell Included |



TRADITIONAL WALL PACK & CCT 3

WALL & AREA LUMINAIRES

ORDERING

*P= Premium DLC / *S = Standard DLC

| Watts (W) | Ordering Code | Description | CCT (K) | Lumens (Lm) | Equiv. Wattage (W) | Dim (V) | IP65 Rated | DLC (S/P) |
|-----------|---------------|----------------------------|-------------|-------------|--------------------|---------|------------|-----------|
| 28 | 9453 | FXTWP28/40K/BZ-PHO | 4000K | 4,128 | 175 | 1-10V | • | P |
| 28 | 9454 | FXTWP28/50K/BZ-PHO | 5000K | 4,189 | 175 | 1-10V | • | P |
| 38 | 9447 | FXTWP38/40K/BZ-PHO | 4000K | 5,700 | 175-250 | 0-10V | • | P |
| 38 | 9448 | FXTWP38/50K/BZ-PHO | 5000K | 5,700 | 175-250 | 0-10V | • | P |
| 60 | 9449 | FXTWP60/40K/BZ-PHO | 4000K | 9,000 | 250-400 | 0-10V | • | P |
| 60 | 9450 | FXTWP60/50K/BZ-PHO | 5000K | 9,000 | 250-400 | 0-10V | • | P |
| 80 | 9451 | FXTWP80/40K/BZ-PHO | 4000K | 12,000 | 400- 575 | 0-10V | • | P |
| 80 | 9452 | FXTWP80/50K/BZ-PHO | 5000K | 12,000 | 400-575 | 0-10V | • | P |
| 28 | 9455 | FXTWP60SW/CCT3/BZ-PHO | 3000K | 4,404 | 175-400 | 0-10V | • | P |
| 38 | | | 4000K | 6,260 | 175-400 | 0-10V | • | P |
| 60 | | | 5000K | 9,134 | 175-400 | 0-10V | • | P |
| 60 | 9456 | FXTWP100SW/CCT3/BZ-PHO | 3000K | 9,065 | 400-750 | 0-10V | • | P |
| 80 | | | 4000K | 11,260 | 400-750 | 0-10V | • | P |
| 100 | | | 5000K | 14,500 | 400-750 | 0-10V | • | P |
| 38 | 9534 | FXTWP38/40K/BZ/347-PHO | 4000K | 5,700 | 175-250 | 0-10V | • | P |
| 38 | 9535 | FXTWP38/50K/BZ/347-PHO | 5000K | 5,700 | 175-250 | 0-10V | • | P |
| 60 | 9536 | FXTWP60/40K/BZ/347-PHO | 4000K | 9,000 | 250-400 | 0-10V | • | P |
| 60 | 9537 | FXTWP60/50K/BZ/347-PHO | 5000K | 9,000 | 250-400 | 0-10V | • | P |
| 28 | 9532 | FXTWP60SW/CCT3/BZ/347-PHO | 3CCT | 4,060 | 175-400 | 0-10V | • | P |
| 38 | | | (3000/ | 5,510 | 175-400 | 0-10V | • | P |
| 60 | | | 4000/5000K) | 8,700 | 175-400 | 0-10V | • | P |
| 60 | 9533 | FXTWP100SW/CCT3/BZ/347-PHO | 3CCT | 8,700 | 400-750 | 0-10V | • | P |
| 80 | | | (3000/ | 11,600 | 400-750 | 0-10V | • | P |
| 100 | | | 4000/5000K) | 14,500 | 400-750 | 0-10V | • | P |

ACCESSORIES (Ordered Separately)



Motion Sensor
P10234 SEN-MC605V-D
(Microwave Motion Photocell Sensor 0-10V)



Replacement Glass Lens
P10002 LENS-TWP-SMALL
(Glass Lens Gasket for 28W)



Surge Protection
P10389 SPD-L-10KV-277
(Surge Protection 10KV 120-277V)



Wireguard
P10004 WG-TWP-MEDIUM
(Wireguard for Medium TWP
38W,60W,80W,100W,CCT3)



Replacement Glass Lens
P10000 LENS-TWP-MEDIUM
(Glass Lens Gasket for 38-100W, CCT3)



Surge Protection
P10390 SPD-L-20KV-277
(Surge Protection 20KV 120-277V)



Emergency Driver
7334 BAEM15-48BC/MV-A
(15W CEC Compliant LED Emergency Driver
for 38W, 60W, 80W, CCT3)



Replacement Plastic Lens
P10003 LENS-TWP-PC-MEDIUM
(Plastic Lens Gasket for 38-100W, CCT3)



Surge Protection
P10391 SPD-L-20KV-480
(Surge Protection 20KV 347-480V)



Emergency Driver
7336 BAEM4-60BC/MV-A
(4W CEC Compliant LED Emergency Driver
for 28W, 38W)



Shield
P10402 CVR-TWP-SMALL/BZ
(Shield cover- small 28W Bronze)




Shield
P10403 CVR-TWP-MEDIUM/BZ
(Shield cover- medium 38-100W Bronze)

TRADITIONAL WALL PACK & CCT 3


WALL & AREA LUMINAIRES

DIMENSIONS

28W
5.51-lbs

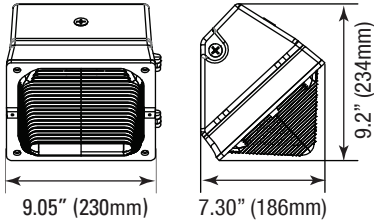


38W
6.79-lbs




60W
6.86-lbs


CCT3 60W
6.86-lbs



80W
8.07-lbs




CCT3 100W
9.26-lbs



PHOTOMETRICS CHART


28 Watt
DLC Premium



| Center Beam fc | Beam Width |
|----------------|------------|
| 2.5ft | 136 f |
| 5.0ft | 34.0 f |
| 7.5ft | 15.1 f |
| 10.0ft | 8.50 f |
| 12.5ft | 5.44 f |
| 15.0ft | 3.78 f |

Vert. Spread: 114.8°
Horiz. Spread: 133.8°


38 Watt
DLC Premium



| Center Beam fc | Beam Width |
|----------------|------------|
| 2.5ft | 182 f |
| 5.0ft | 45.4 f |
| 7.5ft | 20.2 f |
| 10.0ft | 11.3 f |
| 12.5ft | 7.26 f |
| 15.0ft | 5.04 f |

Vert. Spread: 110.4°
Horiz. Spread: 110.3°


60 Watt
DLC Premium



| Center Beam fc | Beam Width |
|----------------|------------|
| 2.5ft | 284 f |
| 5.0ft | 71.1 f |
| 7.5ft | 31.6 f |
| 10.0ft | 17.8 f |
| 12.5ft | 11.4 f |
| 15.0ft | 7.90 f |

Vert. Spread: 103.4°
Horiz. Spread: 99.3°


80 Watt
DLC Premium



| Center Beam fc | Beam Width |
|----------------|------------|
| 2.5ft | 436 f |
| 5.0ft | 109 f |
| 7.5ft | 48.5 f |
| 10.0ft | 27.3 f |
| 12.5ft | 17.5 f |
| 15.0ft | 12.1 f |

Vert. Spread: 107.5°
Horiz. Spread: 98.5°


28/38/60 Watt (CCT)
DLC Premium



| Center Beam fc | Beam Width |
|----------------|------------|
| 2.5ft | 254 f |
| 5.0ft | 63.4 f |
| 7.5ft | 28.2 f |
| 10.0ft | 15.8 f |
| 12.5ft | 10.1 f |
| 15.0ft | 7.04 f |

Vert. Spread: 107.3°
Horiz. Spread: 106.7°

60/80/100 Watt (CCT)
DLC Premium



| Center Beam fc | Beam Width |
|----------------|------------|
| 2.5ft | 540 f |
| 5.0ft | 137 f |
| 7.5ft | 60.0 f |
| 10.0ft | 34.3 f |
| 12.5ft | 21.9 f |
| 15.0ft | 15.2 f |

Vert. Spread: 106.5°
Horiz. Spread: 104.9°

PACKAGE

Case Qty 1 pc

