


## Decorative

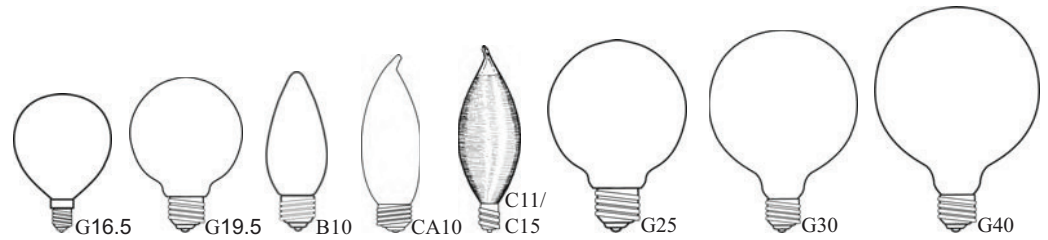

Bulb	Base	Product Number	Footnotes	Product Code	Description	Pkg Qty	Volts	Lumens	Avg. Life	Design Filament	MOL	Beam Spread
<b>60 WATT</b>												
B10	Cand.	1009	2	<b>CTC60</b>	Clear 32mm Halco®	25/500	130	650	3000	CC-2V	3.87"	-
		121009	x,2	<b>CTC60/120</b>	Clear 32mm Halco®	25/500	120	650	3000	CC-2V	3.87"	-
		101284	N,2	<b>CTC60/ND</b>	Clear Neodymium PureLite®	10/50	120	500	5000	CC-2V	3.87"	-
	1010	2	<b>CTF60</b>	Frost 32mm Halco®	25/500	130	640	3000	CC-2V	3.87"	-	
	E14	121027	†	<b>CTC60/E14</b>	Clear 32mm Halco®	25/500	120	650	3000	CC-2V	3.87"	-
	Med.	1018	2	<b>ETC60</b>	Clear 32mm Halco®	25/500	130	650	3000	CC-2V	3.87"	-
		102146	2	<b>ETC60/TF</b>	Clear Silicone Coated Halco®	25/500	130	-	-	CC-2V	3.87"	-
		1019	2	<b>ETF60</b>	Frost 32mm Halco®	25/500	130	640	3000	CC-2V	3.87"	-
	CA10	Cand.	2009	2	<b>CFC60</b>	Clear 32mm Halco®	25/500	130	650	3000	CC-2V	4.12"
2010			2	<b>CFF60</b>	Frost 32mm Halco®	25/500	130	640	3000	CC-2V	4.12"	-
Med.		2018	2	<b>EFC60</b>	Clear 32mm Halco®	25/500	130	650	3000	CC-2V	4.12"	-
		2019	2	<b>EFF60</b>	Frost 32mm Halco®	25/500	130	640	3000	CC-2V	4.12"	-
C11	Cand.	100213	2	<b>C11SG60</b>	Clear Spun Glow Halco®	25/500	130	-	1500	CC-2V	4.02"	-
		100228	x	<b>C11SG60/AMB</b>	Amber Spun Glow Halco®	25/500	130	-	2000	CC-2V	4.02"	-
C15	Med.	100218	2	<b>C15SG60</b>	Clear Spun Glow Halco®	25/500	130	-	1500	CC-2V	4.49"	-
		100226	x	<b>C15SG60/AMB</b>	Amber Spun Glow Halco®	25/500	130	-	2000	C-9	4.49"	-
G16.5	Cand.	4004	2	<b>G16CL60</b>	Clear Halco®	25/500	130	650	3000	CC-2V	3"	-
		4018	2	<b>G16WH60</b>	White Halco®	25/500	130	560	3000	CC-2V	3"	-
G19.5	Med.	104506	2	<b>G19WH60</b>	White Halco®	25/500	130	550	1500	C-9	3.5"	-
G25	Med.	5005		<b>G25CL60</b>	Clear Halco®	10/100	130	550	3500	C-9	4.5"	-
		125005		<b>G25CL60/120</b>	Clear Halco®	10/100	120	550	3500	C-9	4.5"	-
		102382		<b>G25CL60/SB</b>	Clear Silver Bowl	10/100	130	-	3500	C-9	4.5"	-
		5006		<b>G25WH60</b>	White Halco®	10/100	130	480	3500	C-9	4.5"	-
		125006	x	<b>G25WH60/120</b>	White Halco®	10/100	120	480	3500	C-9	4.5"	-
G30	Med.	5506		<b>G30WH60</b>	White Halco®	10/100	130	480	5000	C-9	5"	-
G40	Med.	5205		<b>G40CL60</b>	Clear Halco®	6/24	130	520	5000	C-9	6.93"	-
		5204		<b>G40WH60</b>	White Halco®	6/24	130	450	5000	C-9	6.93"	-
<b>100 WATT</b>												
G25	Med.	5007		<b>G25CL100</b>	Clear Halco®	10/100	130	1100	3500	C-9	4.5"	-
		5008		<b>G25WH100</b>	White Halco®	10/100	130	950	3500	C-9	4.5"	-
G40	Med.	5207		<b>G40CL100</b>	Clear Halco®	6/24	130	1100	5000	C-9	6.93"	-
		5206		<b>G40WH100</b>	White Halco®	6/24	130	950	5000	C-9	6.93"	-
<b>150 WATT</b>												
G40	Med.	5209	x	<b>G40CL150</b>	Clear Halco®	6/24	130	1600	5000	C-9	6.93"	-
		5208		<b>G40WH150</b>	White Halco®	6/24	130	1300	5000	C-9	6.93"	-

Ⓔ Means this lamp meets Federal Minimum Efficiency standards.  
Incandescent symbols, footnotes and abbreviations are located on page 106.