


# H-2Q26-TP-BLS

Brand Name	COMPACT-HPF
Ballast Type	Magnetic
Starting Method	Pre-Heat
Lamp Connection	Series
Input Voltage	120
Input Frequency	60 HZ
Status	Active

## Electrical Specifications

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (°F/C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	MAX THD %	Power Factor	Lamp Current Crest Factor	B.E.F.
* CFM26W/GX24D	2	26	50/10	0.45	54	0.92	15	0.99	1.7	1.72
CFQ26W/G24D	2	26	50/10	0.44	52	0.90	15	0.99	1.7	1.72

## Wiring Diagram

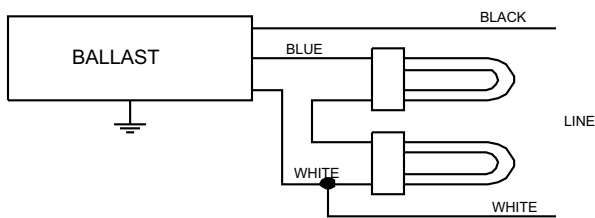


Diag. 50

The wiring diagram that appears above is for the lamp type denoted by the asterisk (\*)

### Standard Lead Length (inches)

	in.	cm.		in.	cm.
Black	7	17.8	Yellow/Blue		0
White	7	17.8	Blue/White		0
Blue	7	17.8	Brown		0
Red		0	Orange		0
Yellow		0	Orange/Black		0
Gray	0		Black/White		0
Violet		0	Red/White		0

## Enclosure

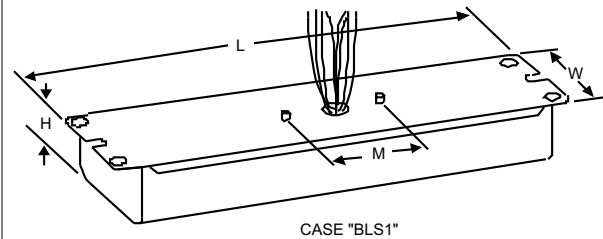

### Enclosure Dimensions

OverAll (L)	Width (W)	Height (H)	Mounting (M)
8.5 "	2.3125 "	1.6875 "	2 "
8 1/2	2 5/16	1 11/16	2
21.6 cm	5.9 cm	4.3 cm	5.1 cm