

HalogenA IDE

HalogenA IDE 500W E40 230V CL 1CT

Mains-voltage high-wattage double-envelope giving a white halogen light

PHILIPS

Product data

• General Characteristics

Cap-Base	E40
Bulb	T38 [T 38mm]
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Life to 50% failures	2000 hr
Nominal Lifetime	2000 hr
Rated Lifetime (hours)	2000 hr
Rated Lifetime (years)	2 an

• Light Technical Characteristics

Color Rendering Index	100 Ra8
Color Temperature	2900 K
Color Temperature Technical	2900 K
Luminous flux lamp	10250 Lm
Rated Luminous Flux	10250 Lm
Luminous Efficacy Lamp	20.5 Lm/W
LLMF - end nominal lifetime	80 (min) %

• Electrical Characteristics

Rated Wattage	500.0 W
Lamp Wattage	500 W
Lamp Wattage Technical	500.0 W
Power Factor	1 -
Voltage	230 V
Lamp Current	2.17 A
Dimmable	Yes
Starting Time	0.0 s

Warm-up Time to 60% Light Outp instant full light

• Environmental Characteristics

Energy Efficiency Label (EEL)	D
Energy consumption kWh/1000h	500 kWh

• Measuring Conditions

Switching cycle	8000X
-----------------	-------


• Product Dimensions

Overall Length C	216 (max) mm
Diameter D	38.5 (max) mm

• Product Data

Order code	923900144240
Full product code	923900144240
Full product name	HalogenA IDE 500W E40 230V CL 1CT
Order product name	HalA IDE 500W E40 230V CL 1CT/6
Pieces per pack	1
Packing configuration	6
Packs per outerbox	6
Bar code on pack - EAN1	8711500491268
Bar code on outerbox - EAN3	8711500499943
Logistic code(s) - 12NC	923900144240
ILCOS code	HEGT-500-230-e40
Net weight per piece	141.000 gr

Dimensional drawing

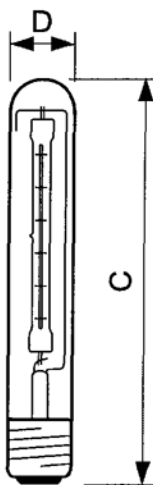

HalogenA IDE 500W E40 230V CL 1CT

Product	C (Max)	D (Norm)	D (Max)
IDE 500W E40 230V T38 CL	216	-	38.5

Dimensional drawing



E40

