

LED LINEAR Highbay LIGHTING

Clear Lens Linear Highbay

Wattage	Order Code	Lumen Output	Color Temp.	CRI	Life Hours	Fixture Color	Amp. Draw (A)		DLC Model Number
							120V	277V	
110W	HB17813*	14740	4000K	80	50,000	White	0.93	0.45	HBL2-110WNAC-BF2
110W	HB43723	14850	5000K	80	50,000	White	0.93	0.45	HBL2-110WCAC-BF2
160W	HB27818*	21700	4000K	80	50,000	White	1.35	0.61	HBL2-160WNAC-BF2
160W	HB41918	21870	5000K	80	50,000	White	1.35	0.61	HBL2-160WCAC-BF2
320W	HB45708	43300	5000K	80	50,000	White	2.80	1.20	HBL-320CAC

Frosted Lens Linear Highbay

Wattage	Order Code	Lumen Output	Color Temp.	CRI	Life Hours	Fixture Color	Amp. Draw (A)		DLC Model Number
							120V	277V	
110W	HB23814*	14300	4000K	80	50,000	White	0.93	0.45	HBL2-110WNAF-BF2
110W	HB51843	14400	5000K	80	50,000	White	0.93	0.45	HBL2-110WCAF-BF2
160W	HB31452*	20360	4000K	80	50,000	White	1.35	0.61	HBL2-160WNAF-BF2
160W	HB52728	21200	5000K	80	50,000	White	1.35	0.61	HBL2-160WCAF-BF2
320W	HB46174	42050	5000K	80	50,000	White	2.80	1.20	HBL-320CAF

* Contact for lead time


Benefits and Features

- V-hook (2pcs) and 42" chain accessories supplied with each fixture for suspended mount
- Versatile and easy to install - pendant or surface mount accessories sold separately
- Operating temperature range of -30°C to 45°C (110W, 160W); -30°C to 40°C (320W)
- Universal 120-277V 50/60 Hz input
- Clear or frosted lens versions available
- 0-10V Dimming standard

Photometrics


110W LED Linear Highbay

Luminous Intensity Distribution Diagram




160W LED Linear Highbay

Luminous Intensity Distribution Diagram




Dimensions


110W: Weight: 10.2 lbs (4.63 kg)



160W: Weight: 14.0 lbs (6.35 kg)



320W: Weight: 28.0 lbs (12.7 kg)

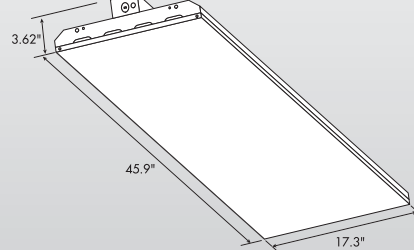

Accessories (Order as separate line items)

- KT21343** - Wire guard kit with hardware for 110W
- KT18519** - Wire guard kit with hardware for 160W
- KT41013** - Wire guard kit with hardware for 320W
- KT16782** - Pendant mount kit with hardware (white)
- KT27604** - Surface mount kit (white) for 110W
- KT35428** - Surface mount kit (white) for 160W and 320W
- KT37197** - Sensor mount kit with hardware (white)
- AC24512** - 1 meter chain with S-hooks (2pcs) (replacement)
- AC28841** - V-Hook (2 pcs set) for 110W Linear HB (replacement)
- AC19722** - V-Hook (2 pcs set) for 160W Linear HB (replacement)
- LN18714** - Clear Lens for 110W for field installation
- LN18725** - Clear Lens for 160W for field installation
- LN48876** - Clear Lens for 320W for field installation
- LN18614** - Frosted Lens for 110W for field installation
- LN18625** - Frosted Lens for 160W for field installation
- LN42193** - Frosted Lens for 320W for field installation