

ELECTRONIC COMPACT FLUORESCENT BALLAST

Input Voltage	120Vac $\pm$ 10%
Ballast Factor	Normal
Starting Method	Rapid Start

CERTIFICATIONS



ELECTRICAL SPECIFICATIONS BY LAMP TYPE

Lamp Type	No. of Lamps	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max THD%
CFQ26WG23q	1	24	0.40	0.54	<1.7	0.90	3.75	150
CFS28W/GR10q	1	26	0.40	0.58	<1.7	0.90	3.46	130
F32T8	1	32	0.45	0.59	<1.7	0.95	2.97	130
F25T8	1	25	0.37	0.57	<1.7	0.95	3.80	130
F19T5(28" or 30")	1	18	0.29	0.52	<1.7	1.00	5.56	150
F18T5(24" or 26")	1	17	0.27	0.52	<1.7	1.00	5.88	160
F17T8	1	18	0.27	0.54	<1.7	1.00	5.55	150
F15T8	1	16	0.26	0.52	<1.7	1.00	6.25	150
F13T8	1	16	0.26	0.51	<1.7	1.10	6.88	160
FC9T5	1	23	0.35	0.55	<1.7	1.05	4.57	140

PERFORMANCE:

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- 3 Year Warranty
- Input Frequency: 60hz


APPROVALS:

- Transient Protection Meets ANSI/IEEE C62.41 Cat A
- Lamp end-of-life protected
- UL, cUL 935 listed


PHYSICAL DIMENSIONS:

- Length (L): 4.00"
- Width (W): 1.87"
- Height (H): 1.19"
- Mounting (M1): 3.58"
- Mounting (M2): 2.00"
- Mounting (M3): 0.63"

- Lead Length:
- White, Black: 12"
- Blue: 12"
- Red: 12"



WIRING DIAGRAM:

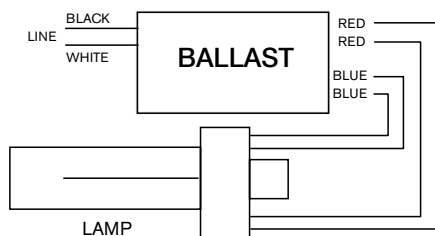

T_C POINT LOCATION:

