

For Quick & Easy Ballast Replacement

Hatch Smart Kit	Universal	Advance	Osram	Robertson	GE	Keystone
HC213PS/UV-K	C213UNVSE000K/BE/BES	ICF-2S13-H1-LD	QTP 1/2x13CF/UNV	PSM213CQMV	GEC213-MVPS-SE GEC213-MVPS-BES	KTEB-213-UV-TP- PSD
HC218PS/UV-K	C218UNVSE/BE/BES	ICF-2S18-H1-LD REL-2Q18 VEL-2Q18 R-2Q18-4P-TP V-2Q18-4P-TP	QTP 1/2x18CF/UNV	PSM218CQMV	GEC218-MVPS-SE GEC218-MVPS-BES	KTEB-218-UV-TP- PSD
HC226PS/UV-K	C2642UNVSE/BE/BES C132SR120BE C132SR277BE C226SR120BE C226SR277BE	ICF-2S26-H1-LD REL-1T32 VEL-1T32 REL-1T42 VEL-1T42	QTP 1x26/32/42CF/UNV QTP 2x26/UNV QTP 1/2xCF/UNV	PSM226CQMV	GEC226-MVPS-SE GEC226-MVPS-BES	KTEB-226-UV-TP- PSD
HC242PS/UV-K	C242UNV BE/SE/BES	ICF-2S42-M2-BS ICF-2S42-MS-LD ICF-2S42-MS-LS		PSP242T-RMVW PSP242T-RMVDW PSP242T-RMVDSW	C242UNVSE C242UNVBES GEC242MVPS-BES GEC242MVPS-SE	KTEB-242T-UV-TP- PSD




Ballast Cross Reference Guide


- Recommended for regularly replaced applications.
- Affordable option for applications replaced less frequently.
- Maximum case temperature of 90 C which is beneficial when used in recessed fixture applications.
- Keeps mounting simple with button and side push in connectors, AND includes all materials needed (bottom lead, side lead adapter plate, mounting feet).
- Senses if the lamp is about to fail, then automatically powers down so there is no damage to the lamp or system.
- Made for institutional, commercial and office use.
- Color coded poke-in connectors.
- Designed to meet the most demanding power requirements.
- Low profile case.
- In most cases, THD is less than 10%.
- Program Start.

Slide on stud mount plates are included with the SMART Stud Mounting Plate Dimensions






13, 18 & 26 Watt Dimensions



42 Watt Dimensions



- For one or two lamps
- Slide on stud mounting plate for J-Box
- Electronic Universal CFL Ballasts
- Color coded lead wires
- Wire removal tool
- No Additional Hardware Required






Compact Fluorescent Electronic Ballast Kit

For Quick & Easy Ballast Replacement

HETCH SMART*

High Power Factor Energy Saving Design

Multiple Wiring & Mounting Applications

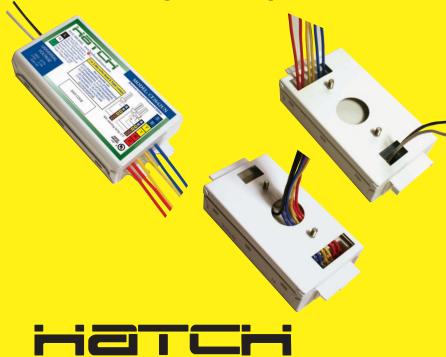

Use Hatch Compact Fluorescent Smart Kit ™ replacement ballasts for 13-42W lamps when replacing lighting fixture ballasts. They are easy to install and energy efficient.

For All J-Box and Fixture Mounting

- **1 Bottom Feed**
- 2 Side Lead
- 3 Bottom Feed w/stud mounting plate
- 4 Bottom Center Feed w/stud mounting plate

Programmed rapid start ballasts apply filament heat initially and delay application of sufficient open circuit voltage to start the lamps until after the filaments have been heated adequately.