


# HR-LED90


## HR90 LED Button Light

# WAC LIGHTING

Responsible Lighting®



Surface mounted



Recessed

Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

### PRODUCT DESCRIPTION

Designed for recessed or surface mounted installations, delivering strong light output with the latest in LED technology.

### FEATURES

- Can be surface mounted or recessed
- Super thin profile at 1/2"
- Edge-lit LEDs reduce glare and assure even light distribution
- Anti-microbial white paint
- Includes 72" pre-installed lead wire
- 100,000 hour rated life
- 5 year WAC Lighting product warranty

### SPECIFICATIONS

**Construction:** Die-cast aluminum fixture, stamped steel housing for surface mount. Beam spread lens.

**Power:** Class 2, 24V remote and plug-in transformers allow for up to 10 button lights to be wired together. Use a multiple terminal block to wire up to 6 fixtures in a neat under cabinet installation without the use of open splices (see below).

**Light Source:** 2700K or 3000K mid-power LEDs. CRI 90

**Dimming:** May be dimmed down to 5% with an electronic low voltage (ELV) dimmer. Compatible with LUTRON DVELV-300 and SELV-300 (ELV) dimmer.

**Mounting:** *Recessed*– 3 1/4" cutout hole. Compression springs hold fixture firmly in place. *Surface*– Screw mounting plate to surface, snap the fixture onto the mounting plate. **Not recommended for use in ceiling.**

**Finish:** Black (BK), Brushed Nickel (BN), Dark Bronze (DB) and White (WT) Anti-microbial paint.

**Standards:** ETL and cETL Listed

### ORDER NUMBER

	Color Temp	Finish	Power	Lumens
HR-LED90	27	2700K	5W*	200
	30	3000K		
		<b>BK</b> Black		
		<b>WT</b> White		
		<b>BN</b> Brushed Nickel		
		<b>DB</b> Dark Bronze		

\*Power consumption may vary depending on the efficiency of the power supply being used.



Example: **HR-LED90-27-BK**

- Minimizes wiring back to transformer
- Minimal voltage drop, power supplied using a variable current
- If one fixture goes out the rest remain on

### CLASS 2 ELECTRONIC TRANSFORMERS


Type	Model	Dim	Input	Output	Power Up To	Dimensions
Remote	<b>EN-2460-RB2</b>	ELV	120V	24V AC/60W	7 × LED90	6 1/2" × 1 5/8" × 1 1/4"
	<b>EN-24100-RB2</b>	ELV	120V	24V AC/96W	10 × LED90	6 1/2" × 1 5/8" × 1 1/4"
	<b>EN-24100-277-RB2-T</b>	0-10V	277V	24V DC/96W	10 × LED90	12 5/8" × 3 3/4" × 2"
Plug-In	<b>EN-2460-P-AR</b>	ELV	120V	24V AC/60W	7 × LED90	2 3/4" X 1 5/8" X 1 3/4"

Includes 6' cord and 5 SL-WC-1 clips.

### MULTIPLE TERMINAL BLOCK

Model #	Dimensions
<b>MTB-01</b>	L: 3 1/4" W: 1 3/4" H: 7/8"

12.5A max accommodates up to 6 output connections for 14 AWG wires.

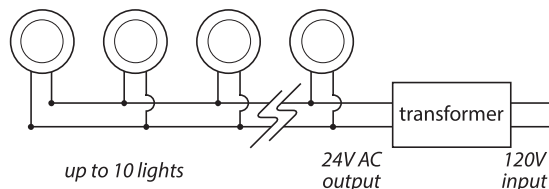

### WAC Lighting

www.waclighting.com  
Phone (800) 526.2588 • Fax (800) 526.2585

### Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050  
Phone (516) 515.5000 • Fax (516) 515.5050

### Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760  
Phone (800) 526.2588 • Fax (800) 526.2585