

LED Luminaires

ProLED Select HoverBay Round Highbay Series

- Lumen packages from 9,600 to 42,000 lm
- Field-selectable beam angle, lumen output, and CCT
- Tool-less access with swappable driver and LED board for easy service
- Multiple mounting options for flexible installation
- Plug-and-play sensor compatibility
- DLC 6.0 Premium

Specifications

Description

The HoverBay Round High Bay delivers high performance, flexibility, and long-term serviceability for warehouses, distribution centers, manufacturing facilities, gymnasiums, and big-box retail spaces. Field-selectable lumen output, CCT, and beam angle allow precise control of light levels and distribution. A tool-less design with swappable LED board and driver simplifies maintenance and extends product life. The powder-coated die-cast aluminium housing and impact-resistant polycarbonate lens provide excellent thermal performance and durability, while an IP65 rating ensures reliable operation in dusty, humid, and wet locations. Installation is fast and versatile with a standard 6' power cord, steel hook, and optional surface-mount U-bracket, and advanced control compatibility supports modern high-bay applications.

Performance

- Selectable Color Temperatures 3500K, 4000K, 5000K
- Field Beam Angle Selectable (60°/90°/110°)
- Up to 180 Lumens per watt
- 80+ CRI
- Operating Temperature Range: -40°C to +55°C
- Built in 6kv surge protection
- 5 Year Limited Warranty

Certifications

- DLC 6.0 Premium
- cULus
- RoHS compliant
- IP65
- Wet location

Applications

- Warehouses
- Manufacturing Facilities
- Gymnasiums
- Big Box Stores
- Retailers
- Showrooms



Construction

- Die-cast Aluminum Housing With Powder Coated Black or White Finish
- Polycarbonate lens
- Standard 6' - 18/3 shielded power cord
- Standard steel hook
- Yoke mount bracket (accessory)
- Wire Guard, PC and AL Refractor, Pendant Mount
- Optional battery backup
- Safety cable

Controls

- 0-10 VDC dimming
- Integrated 3.5 mm audio-jack receptacle for plug-and-play control solutions

ProLED Select HoverBay Round Highbay Series

Product Description

Ordering Logic: Ex: HRRB-1-LS-CS-U-BL

Series	Size	Lumen Selectable	CCT	Voltage	Options	Finish
HRRB = HoverBay Round Highbay	1 = 60W-80W-100W 2 = 100W-120W-150W 3 = 120W-150W-200W 4 = 180W-200W-240W	LS = Lumen Selectable 1-LS = 9,600-12,800-16,000 2-LS = 16,000-19,200-24,000 3-LS = 19,200-24,000-32,000 4-LS = 28,800-32,000-38,400 LS = High Efficacy (HE Option) Lumen Selectable 1-LS = 10,500-14,000-17,500 2-LS = 17,500-21,000-26,250 3-LS = 21,000-26,250-35,000 4-LS = 31,500-35,000-42,000	CS = Color Selectable 3500K/4000K/5000K	U = 120-277VAC H = 277-480VAC	Blank = 150 lm/W HE = 180 lm/W	BL = Black WH = White

Ordering Information

Stock SKU's		
Product SKU	Product Code	Product Description
30400	HRRB-1-LS-CS-U-WH	HoverBay Round Highbay, Lumen Selectable (9,600-12,800-16,000lm/60W-100W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, Universal Voltage 120-277 VAC, White Housing
30401	HRRB-1-LS-CS-U-BL	HoverBay Round Highbay, Lumen Selectable (9,600-12,800-16,000lm/60W-100W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, Universal Voltage 120-277 VAC, Black Housing
30402	HRRB-2-LS-CS-U-WH	HoverBay Round Highbay, Lumen Selectable (16,000-19,200-24,000lm/100W-150W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, Universal Voltage 120-277 VAC, White Housing
30403	HRRB-2-LS-CS-U-BL	HoverBay Round Highbay, Lumen Selectable (16,000-19,200-24,000lm/100W-150W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, Universal Voltage 120-277 VAC, Black Housing
30404	HRRB-3-LS-CS-U-WH	HoverBay Round Highbay, Lumen Selectable (19,200-24,000-32,000lm/120W-200W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, Universal Voltage 120-277 VAC, White Housing
30405	HRRB-3-LS-CS-U-BL	HoverBay Round Highbay, Lumen Selectable (19,200-24,000-32,000lm/120W-200W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, Universal Voltage 120-277 VAC, Black Housing
30406	HRRB-4-LS-CS-U-WH	HoverBay Round Highbay, Lumen Selectable (28,800-32,000-38,400lm/180W-240W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, Universal Voltage 120-277 VAC, White Housing
30407	HRRB-4-LS-CS-U-BL	HoverBay Round Highbay, Lumen Selectable (28,800-32,000-38,400lm/180W-240W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, Universal Voltage 120-277 VAC, Black Housing

ProLED Select HoverBay Round Highbay Series

Accessories

Product SKU	Product Code	Product Description
Accessories		
30414	HRHB-YB-WH	U-shape Bracket White Works with 100-240W
30415	HRHB-YB-BK	U-shape Bracket Black Works with 100-240W
30418	HRHB-AR-12	HoverBay Round Highbay Aluminum Reflector - 100W & 150W Fixtures
30419	HRHB-AR-34	HoverBay Round Highbay Aluminum Reflector - 200W & 240W Fixtures
30420	HRHB-PC-12	HoverBay Round Highbay Polycarbonate Reflector - 100W & 150W Fixtures
30421	HRHB-PC-34	HoverBay Round Highbay Polycarbonate Reflector - 200W & 240W Fixtures
30422	HRHB-WG-12	HoverBay Round Highbay Wire Guard - 100W & 150W Fixtures
30423	HRHB-WG-34	HoverBay Round Highbay Wire Guard - 200W & 240W Fixtures
30424	HRHB-PA-1/2	Pendant Adapter Works with 1/2in NPT Pipe
30425	HRHB-PA-3/4	Pendant Adapter Works with 3/4in NPT Pipe
30426	HRHB-CN	Iron Chain (100-240W) 1.5m Length (59in)
30260	HRHB-JBM	Hoverbay and Essential Round Highbay Junction Box
30432	HRHB-34-HOOK	NPS 3/4" Male Steel Hook for use with Junction Box 30260 (for Essential and Hoverbay Round Highbays)
Battery Backup		
96104*	BBU-30W	Emergency Battery Pack 30 Watt for 60W-240W Round High Bays (Hoverbay & Essential) 100-347V, 90-min Runtime, 0-10V Dimming
Sensors		
37314	HSN-SEN-PIR-DAY-010-3.5-BK	Haisen PIR 12VDC Input, 0-10V Dimming, with Daylight Harvesting and Photocell Function sensor 12VDC, 3.5mm Audio Pin Black
37315	HSN-SEN-MS-DAY-010-3.5-BK	Haisen Microwave 12VDC Input, 0-10V Dimming, with Daylight Harvesting and Photocell Function sensor 12VDC, 3.5mm Audio Pin Black
90555	HSN-REMCON-HD06R	Remote control for DC sensor 0-10V Dimming 12VDC, 3.5mm Audio Pin
37323	HSN-SEN-PIR-DAY-010-3.5-WH	Haisen PIR Sensor 12VDC Input, 0-10V Dimming, with Daylight Harvesting and Photocell Function, 3.5mm Audio Pin White
37324	HSN-SEN-MS-DAY-010-3.5-WH	Haisen Microwave Sensor 12VDC Input, 0-10V Dimming, with Daylight Harvesting and Photocell Function 3.5mm Audio Pin White
25440	SR-Adapter	Sensor Receptacle Adapter Converts 3.5mm Pin to Z-10 Base Receptacle 12-24VDC Black
25441	PSC-ZKV-BLE-PIR-KIT-SR-BN	TruBlu SIG Mesh Fixture PIR Sensor Controller with 3.5mm Pin to Z-10 Base Adaptor Kit for High/Low Bay Z-10 Bronze 12-24VDC Single Channel 0-10V Dimming Indoor/Outdoor with Photocell (for Highbay, Area & Floods) 
25442	PSC-ZKV-BLE-PIR-KIT-SR-WH	TruBlu SIG Mesh Fixture PIR Sensor Controller with 3.5mm Pin to Z-10 Base Adaptor Kit for High/Low Bay Z-10 White 12-24VDC Single Channel 0-10V Dimming Indoor/Outdoor with Photocell (for Highbay, Area & Floods) 

*Note: Battery Backup is not compatible with Non-Stock High Voltage SKUs.

ProLED Select HoverBay Round Highbay Series

Replacements

Product SKU	Product Code	Product Description
High Efficacy LED Boards		
30408	HRHB-LED-12	LED Board with Toolless Connector Converts HRHB-1 (60-100W) and HRHB-2 (100-150W) to 180LPW Higher Lumen Efficacy with Same 3-CCT Selectable and Watts
30409	HRHB-LED-34	LED Board with Toolless Connector Converts HRHB-3 (120-200W) and HRHB-4 (180-240W) to 180LPW Higher Lumen Efficacy with Same 3-CCT Selectable and Watts
HV Drivers		
96104	BBU-30W	Emergency Battery Pack 30 Watt for 60W-240W Round High Bays (Hoverbay & Essential) 100-347V, 90-min Runtime, 0-10V Dimming
30410	HRHB-DRV-480-100W-BL	Driver 277-480V, 60W/80W/100W, Black Housing Swappable no Tools
30411	HRHB-DRV-480-150W-BL	Driver 277-480V, 100W/120W/150W, Black Housing Swappable no Tools
30412	HRHB-DRV-480-200W-BL	Driver 277-480V, 120W/150W/ 200W, Black Housing Swappable no Tools
30413	HRHB-DRV-480-240W-BL	Driver 277-480V, 180W/200W/ 240W, Black Housing Swappable no Tools
30428	HRHB-DRV-480-100W-WH	Driver 277-480V, 60W/80W/100W, White Housing Swappable no Tools
30429	HRHB-DRV-480-150W-WH	Driver 277-480V, 100W/120W/150W, White Housing Swappable no Tools
30430	HRHB-DRV-480-200W-WH	Driver 277-480V, 120W/150W/ 200W, White Housing Swappable no Tools
30431	HRHB-DRV-480-240W-WH	Driver 277-480V, 150W/200W/ 240W, White Housing Swappable no Tools

Non Stock SKUs High Lumen (higher efficacy)

Product SKU	Product Code	Product Description
30433	HRHB-1-LS-CS-U-HE-WH	HoverBay Round Highbay, High Lumen Selectable (10,500-14,000-17,500lm/60W-100W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, Universal Voltage 120-277 VAC, White Housing 180 lm/W
30434	HRHB-1-LS-CS-U-HE-BL	HoverBay Round Highbay, High Lumen Selectable (10,500-14,000-17,500lm/60W-100W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, Universal Voltage 120-277 VAC, Black Housing 180 lm/W
30435	HRHB-2-LS-CS-U-HE-WH	HoverBay Round Highbay, High Lumen Selectable (17,500-21,000-26,250lm/100W-150W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, Universal Voltage 120-277 VAC, White Housing 180 lm/W
30436	HRHB-2-LS-CS-U-HE-BL	HoverBay Round Highbay, High Lumen Selectable (17,500-21,000-26,250lm/100W-150W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, Universal Voltage 120-277 VAC, Black Housing 180 lm/W
30437	HRHB-3-LS-CS-U-HE-WH	HoverBay Round Highbay, High Lumen Selectable (21,000-26,250-35,000lm/120W-200W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, Universal Voltage 120-277 VAC, White Housing 180 lm/W
30438	HRHB-3-LS-CS-U-HE-BL	HoverBay Round Highbay, High Lumen Selectable (21,000-26,250-35,000lm/120W-200W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, Universal Voltage 120-277 VAC, Black Housing 180 lm/W
30439	HRHB-4-LS-CS-U-HE-WH	HoverBay Round Highbay, High Lumen Selectable (31,500-35,000-42,000lm/180W-240W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, Universal Voltage 120-277 VAC, White Housing 180 lm/W
30440	HRHB-4-LS-CS-U-HE-BL	HoverBay Round Highbay, High Lumen Selectable (31,500-35,000-42,000lm/180W-240W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, Universal Voltage 120-277 VAC, Black Housing 180 lm/W

ProLED Select HoverBay Round Highbay Series

Non Stock SKUs High Voltage

Product SKU	Product Code	Product Description
30441	HRHB-1-LS-CS-H-WH	HoverBay Round Highbay, High Voltage Lumen Selectable (9,600-12,800-16,000lm/60W-100W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, High Voltage 277-480VAC, White Housing Gen-2
30442	HRHB-1-LS-CS-H-BL	HoverBay Round Highbay, High Voltage Lumen Selectable (9,600-12,800-16,000lm/60W-100W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, High Voltage 277-480VAC, Black Housing Gen-2
30443	HRHB-2-LS-CS-H-WH	HoverBay Round Highbay, High Voltage Lumen Selectable (16,000-19,200-24,000lm/100W-150W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, High Voltage 277-480VAC, White Housing Gen-2
30444	HRHB-2-LS-CS-H-BL	HoverBay Round Highbay, High Voltage Lumen Selectable (16,000-19,200-24,000lm/100W-150W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, High Voltage 277-480VAC, Black Housing Gen-2
30445	HRHB-3-LS-CS-H-WH	HoverBay Round Highbay, High Voltage Lumen Selectable (19,200-24,000-32,000lm/120W-200W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, High Voltage 277-480VAC, White Housing Gen-2
30446	HRHB-3-LS-CS-H-BL	HoverBay Round Highbay, High Voltage Lumen Selectable (19,200-24,000-32,000lm/120W-200W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, High Voltage 277-480VAC, Black Housing Gen-2
30447	HRHB-4-LS-CS-H-WH	HoverBay Round Highbay, High Voltage Lumen Selectable (28,800-32,000-38,400lm/180W-240W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, High Voltage 277-480VAC, White Housing Gen-2
30448	HRHB-4-LS-CS-H-BL	HoverBay Round Highbay, High Voltage Lumen Selectable (28,800-32,000-38,400lm/180W-240W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, High Voltage 277-480VAC, Black Housing Gen-2

Non Stock SKUs High Voltage & High Lumen (higher efficacy)

Product SKU	Product Code	Product Description
30449	HRHB-1-LS-CS-H-HE-WH	HoverBay Round Highbay, High Voltage & High Lumen Selectable (10,500-14,000-17,500lm/60W-100W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, High Voltage 277-480VAC, White Housing 180 lm/W
30450	HRHB-1-LS-CS-H-HE-BL	HoverBay Round Highbay, High Voltage & High Lumen Selectable (10,500-14,000-17,500lm/60W-100W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, High Voltage 277-480VAC, Black Housing 180 lm/W
30451	HRHB-2-LS-CS-H-HE-WH	HoverBay Round Highbay, High Voltage & High Lumen Selectable (17,500-21,000-26,250lm/100W-150W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, High Voltage 277-480VAC, White Housing 180 lm/W
30452	HRHB-2-LS-CS-H-HE-BL	HoverBay Round Highbay, High Voltage & High Lumen Selectable (17,500-21,000-26,250lm/100W-150W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, High Voltage 277-480VAC, Black Housing 180 lm/W
30453	HRHB-3-LS-CS-H-HE-WH	HoverBay Round Highbay, High Voltage & High Lumen Selectable (21,000-26,250-35,000lm/120W-200W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, High Voltage 277-480VAC, White Housing 180 lm/W
30454	HRHB-3-LS-CS-H-HE-BL	HoverBay Round Highbay, High Voltage & High Lumen Selectable (21,000-26,250-35,000lm/120W-200W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, High Voltage 277-480VAC, Black Housing 180 lm/W
30455	HRHB-4-LS-CS-H-HE-WH	HoverBay Round Highbay, High Voltage & High Lumen Selectable (31,500-35,000-42,000lm/180W-240W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, High Voltage 277-480VAC, White Housing 180 lm/W
30456	HRHB-4-LS-CS-H-HE-BL	HoverBay Round Highbay, High Voltage & High Lumen Selectable (31,500-35,000-42,000lm/180W-240W), CCT Selectable (3500K- 4000K-5000K), Beam Angle Selectable, Controls Ready Bluetooth 3.5mm Jack, High Voltage 277-480VAC, Black Housing 180 lm/W

ProLED Select HoverBay Round Highbay Series

Specifications Table

150lm/w	HRHB-1-LS-CS-U	HRHB-2-LS-CS-U	HRHB-3-LS-CS-U	HRHB-4-LS-CS-U
Nominal Wattage	60W/80W/100W Selectable	100W/120W/150W Selectable	120W/150W/200W Selectable	180W/200W/240W Selectable
Delivered Lumens	9,600/12,800/16,000	16,000/19,200/24,000	19,200/24,000/32,000	28,800/32,000/38,400
Efficacy (lm/W)	150-164	150-164	150-164	150-164
Amperage	120VAC(0.8A) 277VAC(0.35A)	120VAC(1.2A) 277VAC(0.52A)	120VAC(1.6A) 277VAC(0.7A)	120VAC(1.9A) 277VAC(0.82A)
Distribution	60°/90°/110°			
CCT	3500K/4000K/5000K Selectable			
CRI	>80 CRI			
L70 Lifetime (hrs)	>100,000 Hrs			
Voltage	Universal 120-277VAC & High Voltage 277-480VAC			
Power Factor	>0.9			
Dimming	0-10VDC Dimming			
Housing Material	Die-cast Aluminum with Powder Coated Finish			
Lens	Polycarbonate Optics			
Operating Temperature	-40°C to 55°C (-40°F to 131°F)			
Listings	cULus, DLC 6.0 Premium, FCC			
Environment	IP 65, UL Wet Location Rating			
Weight (lbs)	3.3	3.3	3.7	3.7
Warranty	5 Years Standard			

180lm/w	HRHB-1-LS-CS-U-HE	HRHB-2-LS-CS-U-HE	HRHB-3-LS-CS-U-HE	HRHB-4-LS-CS-U-HE
Nominal Wattage	60W/80W/100W Selectable	100W/120W/150W Selectable	120W/150W/200W Selectable	180W/200W/240W Selectable
Delivered Lumens	10,500/14,000/17,500	17,500/21,000/26,250	21,000/26,250/35,000	31,500/35,000/42,000
Efficacy (lm/W)	170-180	170-180	170-180	170-180
Amperage	120VAC(0.8A) 277VAC(0.35A)	120VAC(1.2A) 277VAC(0.52A)	120VAC(1.6A) 277VAC(0.7A)	120VAC(1.9A) 277VAC(0.82A)
Distribution	60°/90°/110°			
CCT	3500K/4000K/5000K Selectable			
CRI	>80 CRI			
L70 Lifetime (hrs)	>100,000 Hrs			
Voltage	Universal 120-277VAC & High Voltage 277-480VAC			
Power Factor	>0.9			
Dimming	0-10VDC Dimming			
Housing Material	Die-cast Aluminum with Powder Coated Finish			
Lens	Polycarbonate Optics			
Operating Temperature	-40°C to 55°C (-40°F to 131°F)			
Listings	UL, cUL, DLC 6.0 Premium, FCC			
Environment	IP 65, UL Wet Location Rating			
Weight (lbs)	3.3	3.3	3.7	3.7
Warranty	5 Years Standard			

ProLED Select HoverBay Round Highbay Series

Performance Table

Product Code	Selectable Wattage	Beam Angle	3500K		4000K		5000K	
			Lumen(lm)	Efficacy(lm/W)	Lumen(lm)	Efficacy(lm/W)	Lumen(lm)	Efficacy(lm/W)
HRRB-1-LS-CS-U	60W	60°	8400	140	9300	155	8520	142
		90°	9000	150	9840	164	9120	152
		110°	8760	146	9600	160	8880	148
	80W	60°	11200	140	12400	155	11360	142
		90°	12000	150	13120	164	12160	152
		110°	11680	146	12800	160	11840	148
HRRB-2-LS-CS-U	100W	60°	14000	140	15500	155	14200	142
		90°	15000	150	16400	164	15200	152
		110°	14600	146	16000	160	14800	148
	120W	60°	14000	140	15500	155	14200	142
		90°	15000	150	16400	164	15200	152
		110°	14600	146	16000	160	14800	148
HRRB-3-LS-CS-U	150W	60°	16800	140	18600	155	17040	142
		90°	18000	150	19680	164	18240	152
		110°	17520	146	19200	160	17760	148
	200W	60°	21000	140	23250	155	21300	142
		90°	22500	150	24600	164	22800	152
		110°	21900	146	24000	160	22200	148
HRRB-4-LS-CS-U	240W	60°	28000	140	31000	155	28400	142
		90°	30000	150	32800	164	30400	152
		110°	29200	146	32000	160	29600	148
	300W	60°	25200	140	27900	155	25560	142
		90°	27000	150	29520	164	27360	152
		110°	26280	146	28800	160	26640	148


Product Code	Selectable Wattage	Beam Angle	3500K		4000K		5000K	
			Lumen(lm)	Efficacy(lm/W)	Lumen(lm)	Efficacy(lm/W)	Lumen(lm)	Efficacy(lm/W)
HRRB-1-LS-CS-U-HE	60W	60°	9300	155	10200	170	9300	155
		90°	10200	170	10800	180	10200	170
		110°	9600	160	10500	175	9600	160
	80W	60°	12400	155	13600	170	12400	155
		90°	13600	170	14400	180	13600	170
		110°	12800	160	14000	175	12800	160
HRRB-2-LS-CS-U-HE	100W	60°	15500	155	17000	170	15500	155
		90°	17000	170	18000	180	17000	170
		110°	16000	160	17500	175	16000	160
	120W	60°	18600	155	20400	170	18600	155
		90°	20400	170	21600	180	20400	170
		110°	19200	160	21000	175	19200	160
HRRB-3-LS-CS-U-HE	150W	60°	23250	155	25500	170	23250	155
		90°	25500	170	27000	180	25500	170
		110°	24000	160	26250	175	24000	160
	200W	60°	28000	155	30400	170	28000	155
		90°	30400	170	32000	180	30400	170
		110°	29200	160	30000	175	29200	160
HRRB-4-LS-CS-U-HE	240W	60°	31000	155	34000	170	31000	155
		90°	34000	170	36000	180	34000	170
		110°	32000	160	35000	175	32000	160
	300W	60°	27900	155	30600	170	27900	155
		90°	30600	170	32400	180	30600	170
		110°	28800	160	31500	175	28800	160

LED Luminaires


ProLED Select HoverBay Round Highbay Series

Dimensions

100-150W

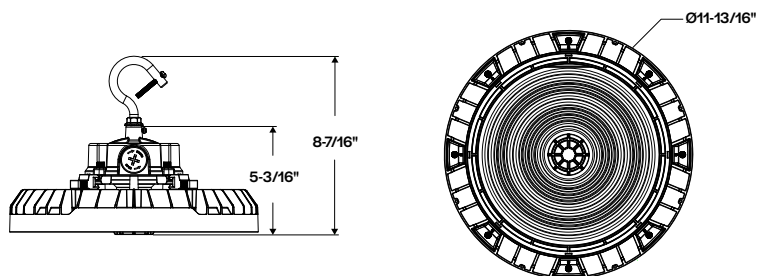


200-240W

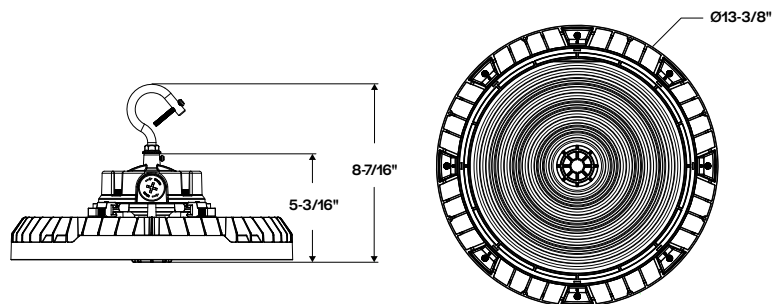

Accessory Options

Wire Guards

Product SKU	Description
30422	Wire Guard for 100-150W
30423	Wire Guard for 200-240W

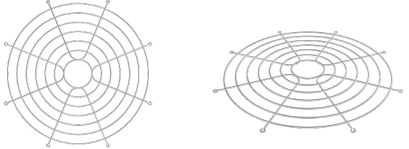

U-Bracket

Product SKU	Description
30414	U-shape Bracket for 100-240W - White
30415	U-shape Bracket for 100-240W - Black



Iron Chain

Product SKU	Description
30426	Iron Chain (100-240W) 1.5m Length (59in)



Reflectors

Product SKU	Description
30418	Aluminum Reflector for 100- 150W
30419	Aluminum Reflector for 200-240W
30420	Polycarbonate Reflector for 100-150W
30421	Polycarbonate Reflector for 200-240W



Polycarbonate Aluminum

Highbay Junction Box Mount

Product SKU	Description
30260	Junction Box Mount Top Thread NPS 3/4in Female, Bottom Thread NPS 1/2in Male



Hook

Product SKU	Description
30432	NPS 3/4" Male Steel Hook for use with Junction Box 30260



Battery Backup

Product SKU	Description
96104	Emergency Battery Pack 30W for 60W-240W Round High Bays



Pendant Mount Adapter

Product SKU	Description
30424	Pendant Adapter Works with 1/2in NPT Pipe
30425	Pendant Adapter Works with 3/4in NPT Pipe




ProLED Select HoverBay Round Highbay Series

Accessory Options

Standalone Sensors			
Image	Color	Part #	Description
	Black	37314	Haisen PIR 12VDC Input, 0-10V Dimming, with Daylight Harvesting and Photocell Function sensor 12VDC, 3.5mm Audio Pin Black
	Black	37315	Haisen Microwave 12VDC Input, 0-10V Dimming, with Daylight Harvesting and Photocell Function sensor 12VDC, 3.5mm Audio Pin Black
	White	37323	Haisen PIR Sensor 12VDC Input, 0-10V Dimming, with Daylight Harvesting and Photocell Function, 3.5mm Audio Pin White
	White	37324	Haisen Microwave Sensor 12VDC Input, 0-10V Dimming, with Daylight Harvesting and Photocell Function 3.5mm Audio Pin White
	New Model	90555	Haisen Remote Control for Programming the PIR Sensors (#37314 & #37323)
Bluetooth mwConnect Sensors & Controllers (Nodes)			
Image	Color	Part #	Description
	Black	25440	Sensor Receptacle Adapter Converts 3.5mm Pin to Z-10 Base Receptacle 12-24VDC Black
	Bronze	25441	TruBlu SIG Mesh Fixture PIR Sensor Controller with 3.5mm Pin to Z-10 Base Adaptor Kit for High/Low Bay Z-10 Bronze 12-24VDC Single Channel 0-10V Dimming Indoor/Outdoor with Photocell (for Highbay, Area & Floods)
	White	25442	TruBlu SIG Mesh Fixture PIR Sensor Controller with 3.5mm Pin to Z-10 Base Adaptor Kit for High/Low Bay Z-10 White 12-24VDC Single Channel 0-10V Dimming Indoor/Outdoor with Photocell (for Highbay, Area & Floods)



Replacements


LED Board	
Product SKU	Description
30408	LED Board with tooless connector for 100-150W
30409	LED Board with tooless connector for 200-240W
 	

Drivers	
Product SKU	Description
30410	Black Driver 277-480V, 60W/80W/100W
30411	Black Driver 277-480V, 100W/120W/150W
30412	Black Driver 277-480V, 120W/150W/200W
30413	Black Driver 277-480V, 180W/200W/240W
30428	White Driver 277-480V, 60W/80W/100W
30429	White Driver 277-480V, 100W/120W/150W
30430	White Driver 277-480V, 120W/150W/200W
30431	White Driver 277-480V, 180W/200W/240W
 	

ProLED Select HoverBay Round Highbay Series

Controls

Quick Install Standalone Controls - Sold Separately

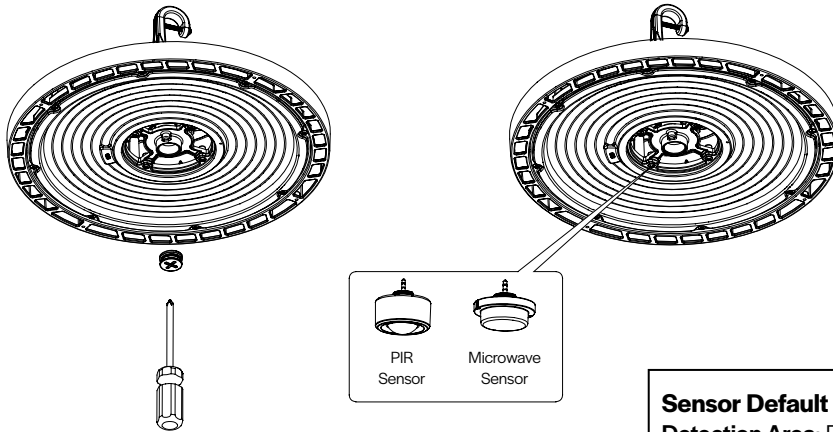

Quick Installation Instructions

1. Ensure power is not applied at fixture
2. Unscrew 1/2" knockout with screwdriver as illustrated
3. Insert the 3.5mm sensor plug fully into the receptacle until it clicks into place
4. Reapply power to fixture
5. Use the remote control to adjust motion settings and operating modes

Sensor Default Settings

Detection Area: Remote Control: 25%/50%/75%/100%

Rotating Switch: Default Setting 100%

Hold Time: Remote Control: 5s/30s/1min/3min/5min/10min/20min/30min

Rotating Switch: 5s/1min/5min/10min

Daylight Sensing: Remote Control: 2Lux/10Lux/30Lux/50Lux/80Lux/120Lux/200Lux/250Lux/300Lux/350Lux/400Lux/Disable

Rotating Switch: Default Setting Disable

Stand-by Dimming Level: Remote Control: 10%/20%/30%/50%


Rotating switch: 0%/10%/20%/30%

Stand-by Period: Remote Control: 0s/10s/30s/1min/5min/10min/30min/60min/+∞

Rotating switch: Default Setting +∞

Commissioning App

Bluetooth mwConnect Controls - Sold Separately

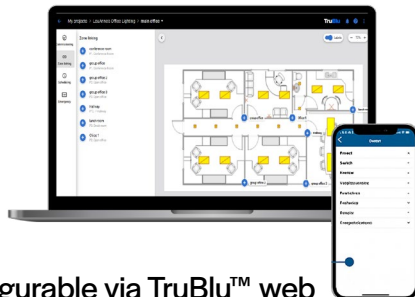

Configurable via TruBlu™ web portal or iOS mobile app




Scan to Download the App for iOS Devices

ProLED Select HoverBay Round Highbay Series


Photometrics

*The below diagrams and zonal lumen summaries represent each fixture at highest wattage selection and at 5000K. For complete photometry/IES files, please contact the factory.


HRHB-1-LS-CS-U

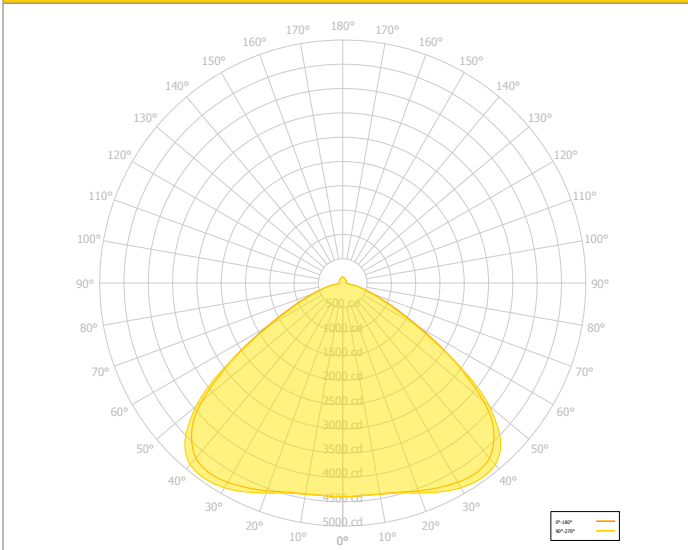

HRHB-2-LS-CS-U

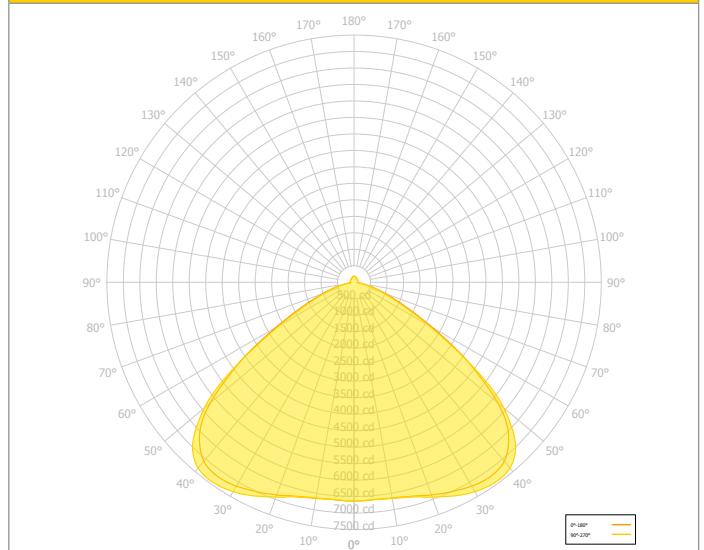

HRHB-3-LS-CS-U

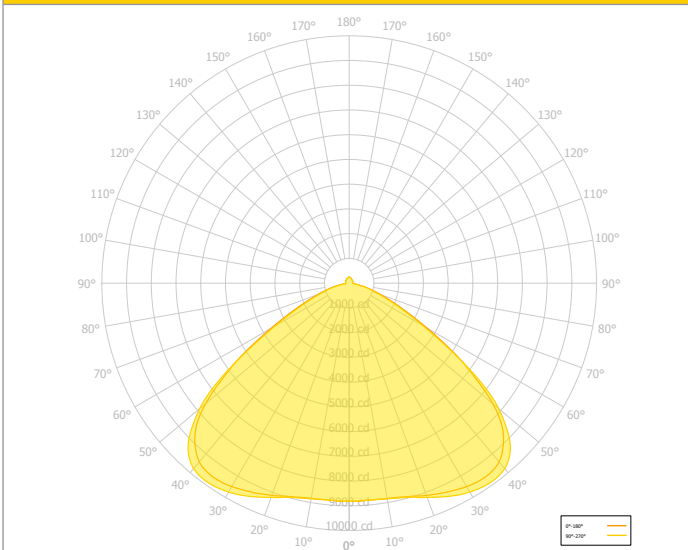

HRHB-4-LS-CS-U

