

IG13-20ELSX

- One Lamp
- Multi-Watt
- Small Case Size
- Lightweight
- Versatile
- Energy Saving



Features & Benefits

Wide lamp versatility, suitable for one CFQ13W/G24q, CFT13W/2GX7, CFM13W/G24q, F14T8, F14T12, F15T8, F15T12, F17T8, F18T8 CFTR18W/GX24, CFQ18W/G24q, FT18W/2G11, F20T8, F20T12, OR FC8T9(22W)G10q lamp

Starting Type: Rapid Start

Class A Sound Rating

End of Lamp Life Protection

More efficient Compared to standard magnetic ballasts

Lead wires do not interfere with mounting holes

Eliminates strobing

Thermal potting

Metal enclosure


Rapid start




SPECIFICATIONS

- Operating Voltage: 120VAC $\pm$ 10%
- Frequency: 50/60Hz
- Protection: Class P Inherent Thermal Protection
- Regulatory Approvals: UL, CUL Listed
- Over Current: Fuse
- Min. Operating Temp: 0°F (-17.78°C)
- Max. Case Temp: 158°F (75°C)
- FCC, 47 CFR, Part 18 Consumer Limits
- Type 1 Outdoor, Normal Power Factor

DIMENSIONS

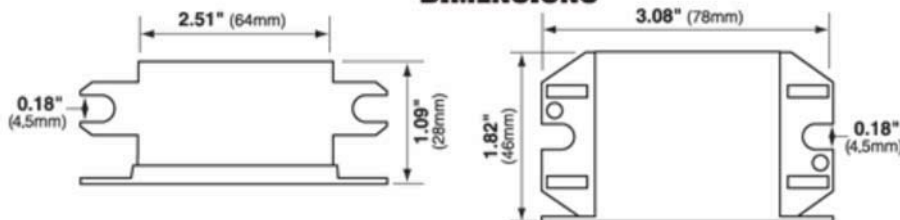

WIRING DIAGRAM

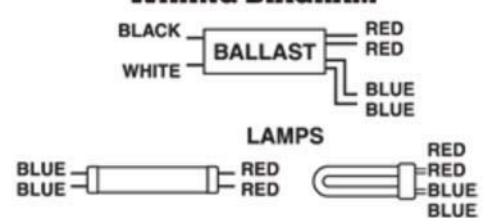

Weight: 5.2 oz. Case Quantity: 50pcs Case Weight: 18.5 lbs Standard Lead Length: black/white-12" blue/red-18"

Line Voltage	Lamp Type	Line Current	Input Power	Power Factor	Crest Factor	Ballast Factor	THD Percent	Min Start Temp
120	*CFQ13W/G24q	0.19	13.4	0.57	1.57	0.98	113.7	0°F
120	*CFT13W/2GX7	0.16	10.2	0.54	1.52	0.70	124.1	0°F
120	*CFQ18W/G24q	0.20	14.7	0.57	1.55	0.83	112.3	0°F
120	F14T8	0.15	10	0.55	1.7	0.77	126	0°F
120	F14T12	0.15	10	0.55	1.7	0.74	131	0°F
120	F15T8	0.16	11	0.56	1.7	0.83	118.5	0°F
120	F15T12	0.16	10	0.55	1.7	0.78	124.1	0°F
120	*F17T8	0.19	13	0.57	1.5	0.80	113.2	0°F
120	F18T8	0.18	12	0.57	1.6	0.67	112.6	0°F

120	F20T12	0.18	12	0.57	1.62	0.64	116.5	0°F
-----	--------	------	----	------	------	------	-------	-----

* Listed ballasts meet the ballast-controlled performance requirements in the ENERGY STAR program.

[For Warranty Information Click Here](#)