


IG217-40ELU-HPF

- One or Two Lamp
- Multi-Watt
- Energy Saving
- Universal Voltage

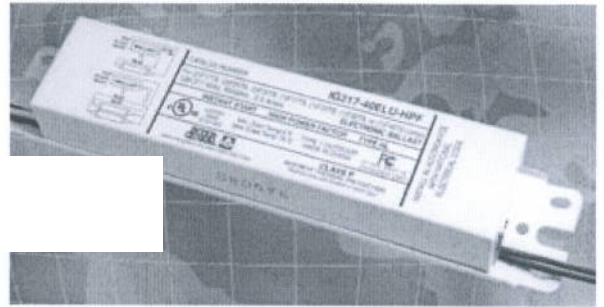

Features & Benefits

Wide lamp versatility, suitable for one F17T8, F25T8, F32T8, F32T8/U, F40T8 lamp or two F17T8, F25T8, F32T8, F32T8/U lamps

Eliminates strobing

Class A Sound Rating

Thermal potting

More efficient compared to standard magnetic ballasts


Metal enclosure

Instant Start


SPECIFICATIONS

- Operating Voltage: 120, 208, 220, 240, 277 VAC
- Frequency: 50/60Hz
- Protection: Class P Inherent Thermal Protection
- Regulatory Approvals: UL, CUL Listed
- Over Current: Fuse
- Min. Operating Temp: 0°F (-17.78°C)
- FCC, 47 CFR Part 18 Consumer Limits
- Type 1 Outdoor, High Power Factor

DIMENSIONS

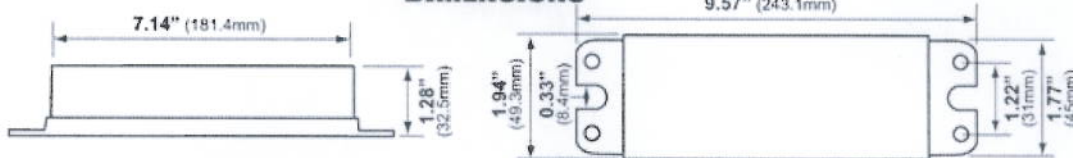

WIRING DIAGRAM



Weight: 20 oz. Case Quantity: 30pcs Case Weight: 38 lbs Standard Lead Length: black/white-26" red-37" blue-31"

Line Voltage	Lamp Type	Line Current	Input Power	Power Factor	Crest Factor	Ballast Factor	THD Percent	Min Start Temp
120	1 X F17T8	0.19	22	1.0	1.41	1.10	8.4	0°F
277	1 X F17T8	0.10	22	0.80	1.40	1.10	29.6	0°F
120	2 X F17T8	0.26	33	1.0	1.45	0.88	5.9	0°F
277	2 X F17T8	0.13	32	0.91	1.45	0.88	20.7	0°F
120	1 X F25T8	0.25	29	1.0	1.41	1.02	7.2	0°F
277	1 X F25T8	0.12	30	0.90	1.41	1.02	23.2	0°F
120	2 X F25T8	0.40	48	1.0	1.47	0.88	5.3	0°F
277	2 X F25T8	0.17	47	0.95	1.48	0.88	13.8	0°F
120	1 X F32T8	0.38	37	1.0	1.46	1.07	5.9	0°F
277	1 X F32T8	0.15	39	0.94	1.40	1.07	17.5	0°F
120	2 X F32T8	0.49	60	1.0	1.47	0.88	4.7	0°F
277	2 X F32T8	0.22	58	0.96	1.48	0.88	9.6	0°F
120	2 X F32T8U	0.30	36	1.0	1.40	0.96	5.2	0°F
277	2 X F32T8U	0.14	36	0.93	1.50	0.96	15.9	0°F
120	2 X F32T8U	0.47	57	1.0	1.38	0.86	4.0	0°F