

IG230ELSK

- Two Lamp
- Multi-Watt
- Small Case Size
- Lightweight
- Versatile
- Energy Saving



Features & Benefits

Wide lamp versatility, suitable for two F25T8, F25T12, F30T8, F30T12, *F32T8, *F34T12, *F40T8, *F40T10, or *F40T12 lamps

Class A Sound Rating

End of Lamp Life Protection

More efficient compared to standard magnetic ballasts

Lead wires do not interfere with mounting holes

Contains No PCBs

Eliminates strobing

Thermal potting

Metal enclosure


Rapid Start




SPECIFICATIONS

- Operating Voltage: 120 VAC \pm 10%
- Frequency: 50/60Hz
- Protection: Class P Inherent Thermal Protection
- Regulatory Approvals: UL, CUL Listed
- Over Current: Fuse
- Min. Starting Temp: 0°F (-17.78°C)
* 32°F Min. Operating Temp
- Max. Case Temp: 158°F (75°C)
- FCC, 47 CFR, Part 18 Consumer Limits
- Type 1 Outdoor, Normal Power Factor

DIMENSIONS

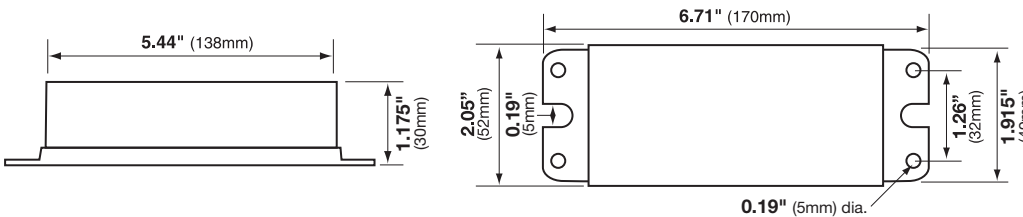

WIRING DIAGRAM



Weight: 13 oz. Case Quantity: 40pcs Case Weight: 35 lbs Standard Lead Length: black/white-24" blue/red-26" yellow-44"

Line Voltage	Lamp Type	Line Current	Input Power	Power Factor	Crest Factor	Ballast Factor	THD Percent	Min Start Temp
120	★ F25T8	0.70	50.6	0.507	1.39	1.0	119.2	0°F
120	F25T12	0.58	36.8	0.53	1.50	0.74	119.5	0°F
120	F30T8	0.70	46.6	0.55	1.50	0.78	119.1	0°F
120	F30T12	0.63	41.4	0.54	1.40	0.70	119.7	0°F
120	★ F32T8	0.80	61.5	0.53	1.40	0.90	117.3	32°F
120	F34T12	0.66	43.6	0.55	1.40	0.66	119.3	32°F



★ SCAN THE QR CODE TO THE LEFT TO ACCESS THE ENERGY STAR SUB COMPONENT DATABASE.

For warranty information refer to Inter-Global's BALLAST LIMITED WARRANTY in the back of the Ballast section of this catalog.

For more information contact our sales department at 1-800-325-7364 or visit www.interglobal-inc.com

Specifications subject to change without notice. Printed in U.S.A. © 2013 Inter-Global Inc.