

## IG5-13ELS

- One Lamp
- Multi-Watt
- Small Case Size
- Lightweight
- Versatile
- Energy Saving



### Features & Benefits

Wide lamp versatility, suitable for one F8T5, F13T5\*, CFT5W/2G7, CFT7W/2G7, or CFT9W/2G7 lamp

Class A Sound Rating

End of Lamp Life Protection

More efficient compared to standard magnetic ballasts

Lead wires do not interfere with mounting holes

Contains No PCBs

Eliminates strobing

Thermal potting

Metal enclosure

Rapid Start




### SPECIFICATIONS

- Operating Voltage: 120 VAC  $\pm$  10%
- Frequency: 50/60Hz
- Protection: Class P Inherent Thermal Protection


- Regulatory Approvals: UL, CUL Listed
- Over Current: Fuse
- Min. Starting Temp: 0°F (-17.78°C)  
\* 32°F Min. Starting Temp

- Max. Case Temp: 158°F (75°C)
- FCC, 47 CFR, Part 18 Consumer Limits
- Type 1 Outdoor, Normal Power Factor

### DIMENSIONS

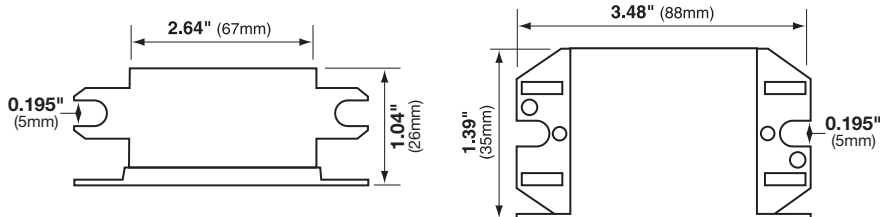

### WIRING DIAGRAM

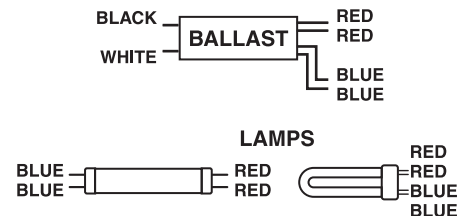

Weight: 5.2 oz. Case Quantity: 50pcs Case Weight: 16 lbs Standard Lead Length: black/white-12" blue/red-18"

| Line Voltage | Lamp Type | Line Current | Input Power | Power Factor | Crest Factor | Ballast Factor | THD Percent | Min Start Temp |
|--------------|-----------|--------------|-------------|--------------|--------------|----------------|-------------|----------------|
| 120          | F8T5      | 0.12         | 7.4         | 0.53         | 1.4          | 0.55           | 117.5       | 0°F            |
| 120          | F13T5     | 0.16         | 10.6        | 0.56         | 1.5          | 0.65           | 101.5       | 32°F           |
| 120          | CFT5W/2G7 | 0.9          | 5.2         | 0.50         | 1.6          | 0.84           | 136.1       | 0°F            |
| 120          | CFT7W/2G7 | 0.11         | 6.7         | 0.52         | 1.5          | 0.82           | 123.2       | 0°F            |
| 120          | CFT9W/2G7 | 0.12         | 7.5         | 0.53         | 1.5          | 0.81           | 117.4       | 0°F            |