




ENCAPSULATED CORE & COIL BALLAST SINGLE LAMP

- Contains no PCBs
- Product Specifications listed below

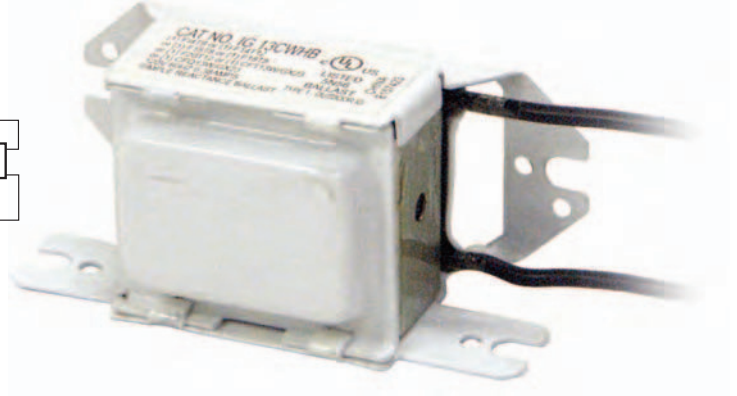

WIRING DIAGRAM



CASE STYLES

	A	B	C	D	E	F
1	-	-	1 3/16"	1 7/16"	2"	2 3/8"
2	3 5/64"	2 9/16"	1 1/4"	1 47/64"	2 47/64"	3 5/64"

15" LEAD LENGTHS FOR STOCKED BALLASTS. CUSTOM LEAD LENGTHS AVAILABLE. CALL FOR DETAILS.

Lamp Data		Part #	Circuit Electrical Data						Physical Data			Certification
Watts	Model#		Volts	Hz	Line Current (Amps)	Input (Watts)	Minimum Starting Temp	Sound Rating	Case Style	Std. Pkg	Weight	
13	CFT13W/GX23 CFQ13W/G23-2	*IG13CPWH	120	60	0.300	16	32°F	A	2	50	32lbs.	UL-CUL
14,15 17,20	F14T8 F14T12 F15T8 F15T12 F17T8 F20T12	IG15-20	120	60	0.320	14-20	32°F	A	2	50	32lbs.	UL-CUL
14,15, 18,20	F14T12 F14T8 F15T8 F18T8 F20T12	†IG13CWHB	120	60	0.300	15	32°F	A	2	50	30lbs.	UL-CUL
5,7, 8,9	CFT5W/G23 CFT7W/G23 CFT9W/G23 F8T5	*IG9CP	120	60	0.150	10.2	32°F	A	2	50	30lbs.	UL-CUL
5,7 8,9	CFT5W/G23 CFT7W/G23 CFT9W/G23 F8T5	IG9C	120	60	0.190	10.2	32°F	A	1	50	30lbs.	UR
13	CFT13W/GX23 CFQ13W/G23-2	IG13C	120	60	0.350	16.0	32°F	A	2	50	33lbs.	UR-CUR

* Ballast Class P

† Non-stocked, Special Order, Call for details

NOTE: All Ballasts Type 1, Outdoor

For warranty information refer to Inter-Global's BALLAST LIMITED WARRANTY in the back of the Ballast section of this catalog.

For more information contact our sales department at 1-800-325-7364 or visit www.interglobal-inc.com
Specifications subject to change without notice. Printed in U.S.A. © 2013 Inter-Global Inc.



1209.1

A5