




## MR-TYPE Base : GU4 / GU5.3



Voltage	Wattage	Axis(cd)	Rated Average Life (Hr.)	Beam Angle	Color Temp.(K)	Base	Lamp Type	Dimension(mm)	
								L	D
6	10	750	2000	SP - 9	2800	GU4	MR8	27.8	25.3
12	20	1700	2000	SP - 10	2800	GU4	MR8	27.8	25.3
12	20	800	2000	FL - 23	2800	GU4	MR8	27.8	25.3
12	35	2300	2000	SP - 13	2800	GU4	MR8	27.8	25.3
12	35	1400	2000	FL - 26	2800	GU4	MR8	27.8	25.3
6	5	250	1000	SP - 10	2700	G4	MR11	35	35.3
6	5	50	1000	FL - 30	2700	G4	MR11	35	35.3
6	10	750	1500	SP - 10	2700	G4	MR11	35	35.3
6	10	150	1500	FL - 30	2700	G4	MR11	35	35.3
6	15	2200	1500	SP - 10	2700	G4	MR11	35	35.3
6	15	350	1500	FL - 30	2700	G4	MR11	35	35.3
6	20	3600	1500	SP - 10	2700	G4	MR11	35	35.3
6	20	600	1500	FL - 30	2700	G4	MR11	35	35.3
12	5	250	1000	SP - 10	2700	G4	MR11	35	35.3
12	5	50	1000	FL - 30	2700	G4	MR11	35	35.3
12	10	750	1500	SP - 10	2700	G4	MR11	35	35.3
12	10	150	1500	FL - 30	2700	G4	MR11	35	35.3
12	15	2200	1500	SP - 10	2700	G4	MR11	35	35.3
12	15	350	1500	FL - 30	2700	G4	MR11	35	35.3
12	20	4800	2000	SP - 12	2800	GU4	MR11 - FTB	35	35.3
12	20	1550	2000	MED - 24	2800	GU4	MR11 - FTC	35	35.3
12	20	600	2000	FL - 36	2800	GU4	MR11 - FTD	35	35.3
12	35	7000	2000	SP - 12	2800	GU4	MR11 - FTE	35	35.3
12	35	2750	2000	MED - 24	2800	GU4	MR11 - FTF	35	35.3
12	35	1300	2000	FL - 36	2800	GU4	MR11 - FTH	35	35.3
12	20	3500	2000	SP - 12	2800	GU5.3	MR16 - ESX	48	50.7
12	20	950	2000	MED - 24	2800	GU5.3	MR16 - BBF	48	50.7
12	20	525	2000	FL - 36	2800	GU5.3	MR16 - BAB	48	50.7
12	35	6000	2000	SP - 12	2800	GU5.3	MR16 - FMT	48	50.7
12	35	3650	2000	MED - 24	2800	GU5.3	MR16 - FMY	48	50.7
12	35	1450	2000	FL - 36	2800	GU5.3	MR16 - FMW	48	50.7
12	50	8300	2000	SP - 12	2800	GU5.3	MR16 - EXT	48	50.7
12	50	4400	2000	MED - 24	2800	GU5.3	MR16 - EXZ	48	50.7
12	50	1450	2000	FL - 36	2800	GU5.3	MR16 - EXN	48	50.7
12	50	750	2000	WFL - 60	2800	GU5.3	MR16 - FNV	48	50.7
12	75	8500	2000	SP - 12	2800	GU5.3	MR16 - EYF	48	50.7
12	75	4300	2000	MED - 24	2800	GU5.3	MR16 - EYJ	48	50.7
12	75	2000	2000	FL - 36	2800	GU5.3	MR16 - EYC	48	50.7

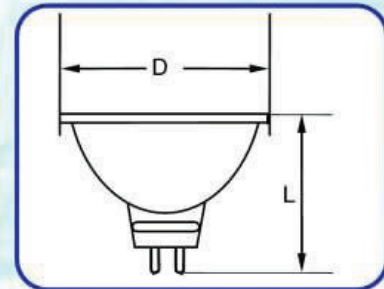