


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

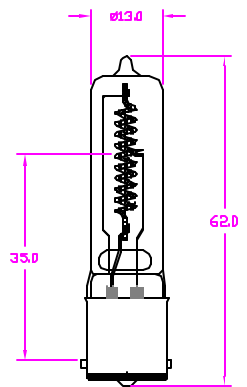

- NOTES:
1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350 °C
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES			CONTRACT NO.		
DECIMALS .X ± -			APPROVALS		
.XX ±			DATE		
.XXX ±			DRAWN R. AMPARO 05/02/01		
ANGLES ±			CHKD J. COOPER 05/02/01		
DRILLED HOLES PER AND 10357 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			ENGR		
MATERIAL			MRG		
COMPOSITE			QUAL		
FINISH			ORGN ACTVY		
			DDVT ACTVY		
			SCALE NONE		
			WEIGHT		
			SHEET 1 OF 1		

USHIO AMERICA, INC.
5440 Carritos Ave. Cypress, CA90630

TITLE
JCV120V-100WGB
HALOGEN LAMP

SIZE B

CODE IDENT NO. 1000968

DWG NO. 1000968

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	100 W
TOTAL LUMEN	1600 Lm
COLOR TEMP.	2800 K
AVERAGE LIFE	2000 HRS
FILAMENT TYPE	CC-B
BASE TYPE	BA15d
BULB FINISH	CLEAR
BURN POSITION	ANY

NEXT ASSY	USED ON	APPLICATION

