
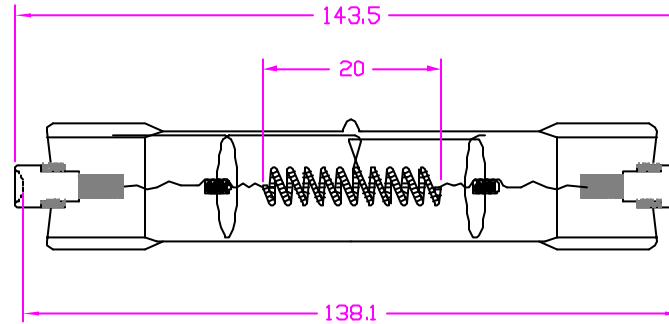


REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------



NOTE5:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	1000 W
COLOR TEMP	3000 K
LUMENS	23400 Lm
AVERAGE LIFE	2000 HRS
FILAMENTTYPE	CC-8
BASE TYPE	R7s-1B
BULB FINISH	CLEAR

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10307 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Ave. Cypress, CA 90630		
		APPROVALS				DATE
		DRAWN	R.AMPARO			04/17/01
		CHECKED				04/17/01
		ENGR				
		MFG				
MATERIAL		QUAL	SIZE	CODE IDENT NO.	DWG NO.	
COMPOSITE			B	DWT	1000228	
FINISH		DSGN ACTVY	SCALE	WEIGHT	SHEET	
		QOVT ACTVY	NONE		1 OF 1	