

Avant Garde

55W VERTICAL CYLINDER LED

T388L

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____



PRODUCT DESCRIPTION

The classic, simple appearance of the Vertical Cylinder LED fixtures offers a fresh take on a traditional aesthetic. The subtle elegance is carried through the entire design producing an understated charm. The 55W Vertical Cylinder LED fixtures have integral TIR optics which enable uniform spot, narrow flood, flood or wide flood distributions to be achieved. These fixtures have an integral, bayonet-mounted accessory holder that accommodates up to two accessories if desired. The 55W Vertical Cylinder LED can deliver up to 5550 lumens, at efficacies up to 101LPW and having a rated life of 50,000 hours. Available in 2700K, 3000K, 3500K and 4000K color temperatures, the white-light 55W Vertical Cylinder LED is compatible with all Juno line voltage trac and wide adapter accessories.



PRODUCT SPECIFICATIONS

Construction All-metal housing and custom designed concealed heat sink provides outstanding thermal management, yielding 70% average lumen maintenance at 50,000 hours of operation • Passively-cooled design – no moving parts to break or wear-out • Extruded aluminum vertically mounted LED driver housing • Concealed fixture wiring for a clean aesthetic • Fashionable, elegant design complements any decor • Available in white, black and silver painted finishes.

LED High performance LED array provides outstanding reliability, performance and color quality/consistency • 2700K, 3000K, 3500K or 4000K white phosphor high performance LEDs • Chromaticity range within a 3-step MacAdam Ellipse • 80 CRI minimum on standard product • Optional high CRI versions offer 90 CRI minimum • Optional SpectralWhite versions are also available which make whites appear naturally brilliant and render colors more richly.

Driver Assembled in a side-mount vertical housing to minimize overall fixture footprint • Insulating air gap between driver and LED light engine optimizes thermal operation • Provides quiet operation with or without dimming • 120V versions only are standard dimming-compatible using high quality, factory approved reverse phase ELV dimmers - see [T388L-DIM](#) • Solid state electronic, Class 2 compliant • Integral overcurrent and short circuit protection • Class B FCC Part 15 rated.

Optics Interchangeable computer-designed custom TIR optics available in four factory-configured beam spreads • One TIR optic provided with fixture (as specified in catalog number) • Accessory optics available to enable beam changes in the field • Beam patterns can be altered as desired using a variety of available light control accessories.

Juno Universal Trac Adapter Universally compatible with both Trac-Master 1-circuit or 2-circuit trac, Trac-Lites trac, monopoints and special mountings • Also UL Recognized for use on ConTech® LT Series track • Oversized trac adapter for greater mounting stability • Copper alloy contacts provide precise spring action – no arcing and will not take a set • True, positive electrical ground • On/off switch included • Patented embossed polarity arrows on bottom of adapter • Spring-loaded positive latch with embossed polarity arrows secures trac light to trac • Two-position power contact provided for two-circuit application.

Alternate TEK/HTEK Trac Adapter Compatible with either Juno TEK or HTEK trac systems • System specific and assembled to trac fixture • Integrally polarized construction to prevent reverse installation – only allows insertion in proper orientation • Rotary circuit selector enables simple switching between circuits • Integral on/off switch enables individual fixtures to be switched for servicing.

Alternate GTYPE Trac Adapter Compatible with track systems based on GES type track, including Lithonia LT Commercial Track (not LTS type) • System specific and assembled to trac fixture • Consult factory for additional information.

Alternate HTYPE Trac Adapter Compatible with track systems which use a H-type track adapter, including Lithonia LTS Decorative Track (not LT type) • System specific and assembled to trac fixture • Two-position power contact provided for two-circuit application • Consult factory for additional information.

Alternate LTYPE Trac Adapter Compatible with track systems which use a L-type track adapter • System specific and assembled to trac fixture • Two-position power contact provided for two-circuit application • Consult factory for additional information.

Accessory Holder Integral to fixture design • Die cast aluminum construction • Precision bayonet mounting • Accommodates up to two accessories if desired.

Aiming 360° horizontal coverage • Greater than 90° vertical aiming capability.


Labels UL and C-UL Listed • ENERGY STAR® certified • 80 CRI and 90 CRI versions are DesignLights Consortium® Qualified • 90CRI and 97CRI versions can be used to comply with California Title 24, Part 6 high efficacy LED light source requirements • Union made • Assembled in U.S.A.

Buy American This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT. Please refer to www.acuitybrands.com/buy-american for additional information.

Warranty 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Specifications subject to change without notice.

DIMENSIONS

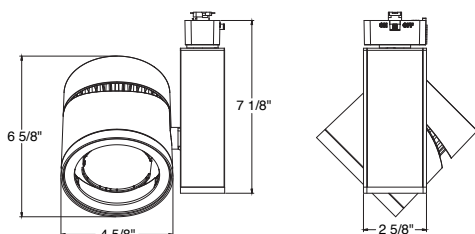

ConTech is a registered trademark of ConTech Lighting.



TRAC-MASTER®

Avant Garde

55W VERTICAL CYLINDER LED

T388L

ORDERING INFORMATION

Ordering Example: T388L 30K 90CRI PDIM NFL SL

Series	Mounting Adapter Type	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution	Finish
T388L 55W Vertical Cylinder LED	(Blank) Juno Universal 120V Trac Adapter	27K 2700K 30K 3000K	80CRI 80 CRI 90CRI 90 CRI SPW² SpectralWhite	OFF¹ On/Off (Non-Dimming) PDIM Phase Dimmable	SP Spot NFL Narrow Flood FL Flood WFL Wide Flood	BL Black SL Silver WH White
	HTEK¹ HTEK 277V Trac Adapter	35K 3500K 40K 4000K				
	TEK TEK 120V Trac Adapter					
	GTYPE G-Type Trac Adapter					
	HTYPE H-Type Trac Adapter					
	LTYPE L-Type Trac Adapter					

Accessories							
HCLBL 375	Hexcell Louver - Black	TBDR BLCK 375	Barn Doors - Black	DIFF 375	Diffusion Lens	TIR3 SPT	TIR Optic – Spot
CCLBL 375	Cube Cell Louver - Black	CGF 375	Color Glass Filter	SOLITE 375	Uniformity Lens (Solite)	TIR3 NFLD	TIR Optic – Narrow Flood
XBAFLBL 375	Cross Baffle - Black	DGF 375	Dichroic Glass Filter	PRISM 375	Prismatic Spread Lens	TIR3 FLD	TIR Optic – Flood
SNOOTBL 375	Snoot - Black	DCCF 375³	Dichroic Color Correction Filter	LSPREAD 375	Linear Spread Lens	TIR3 WFLD	TIR Optic – Wide Flood
EYEBROWBL 375	Eyebrow - Black	UVF 375	UV Filter	T40N⁴	Monopoint Canopy		

See specification sheet [D1.2.2](#) for details.

Other accessories can be found on specification sheet [D1.2.0](#).

Notes:

- HTEK versions available with OFF option only (not dimmable), and OFF option available with HTEK versions only; if HTEK is selected, fixture is not DLC qualified.
- 3000K and 3500K only.
- DCCF 375 HAL2700 corrects 3000K color to approximately 2700K and 4000K color to approximately 3400K.
- Add finish code to complete catalog number (Example: T40N WH).