KT-RHLEDXXXPS-1XC-8CSB-VDIM-X /G2

ROUND LED HIGHBAY FIXTURE

DESCRIPTION

Compact Round LED Highbay Fixture | Wet Location Rated

APPLICATION

Used for commercial and industrial highbay lighting applications



c UL us LISTED | DLC LISTED PREMIUM | DLC LISTED | TAA** COMPLIANT | TRUSTED NLB WARRANTY | **10 YEAR** LIMITED WARRANTY

PRODUCT FEATURES

- Keystone Power Select technology. *(see Perfomance Specifications for details)*
- Features Keystone Color Select technology. Adjust CCT between 3000K, 4000K, or 5000K
- Sensor Receptacle designed to accept easy screw-in installation of optional sensors
- Powered by Keystone 0–10V dimming LED driver
- J-Hook mounting accessory included
- 6' cord for input and dimming wires
- Powder-coated aluminum housing; Polycarbonate lens
- Ribbed lens to reduce glare
- Low optical flicker
- Built-in 6kV surge protection
- LED lifetime: L70 >100,000 hours @ 25°C fixture ambient
- Ambient operating temperature: −40°C/−40°F to 50°C/122°F
- IP65 rated, wet location

**** TAA options available. See *Ordering Information* below**

PERFORMANCE SPECIFICATIONS OVERVIEW

Catalog Number	Nominal Size	Selectable Wattage	Preset CCT	Lumens	Efficacy	Input Voltage	Housing Color
KT-RHLED100PS-11C-8CSB-VDIM /G2	11" Circular	100/70/50W	5000K	15,290	150 lm/W	120–277V	Black or white finishes available
KT-RHLED150PS-11C-8CSB-VDIM /G2	11" Circular	150/100/70W		22,490	150 lm/W		
KT-RHLED200PS-12C-8CSB-VDIM /G2	12" Circular	200/150/100W		31,640	158 lm/W		
KT-RHLED240PS-13C-8CSB-VDIM /G2	13" Circular	240/200/150W		37,010	156 lm/W		

Nominal Values above represent output when set to 5000K, please see page 3 for detailed output numbers
Note: Color uniformity: CCT (Correlated Color Temperature) range as per guidelines outlined in ANSI C78.377-2017

POWER SELECTION AND COLOR TEMPERATURE SELECTION CAPABILITY

KEYSTONE POWER SELECT TECHNOLOGY
Adjust power between 240W, 200W, or 150W

KEYSTONE COLOR SELECT TECHNOLOGY
Adjust CCT between 3000K, 4000K, or 5000K



SINCE 1945 KEYSTONE LIGHT MADE EASY | XFiT | POWER SELECT COLOR SELECT

KT-RHLEDXXXPS-1XC-8CSB-VDIM-X /G2

ROUND LED HIGH BAY FIXTURE

PERFORMANCE SPECIFICATIONS DETAILED

Catalog Number	Nominal Size	Selectable Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimmable	CRI	Housing Color
KT-RHLED100PS-11C-8CSB-VDIM /G2 KT-RHLED100PS-11C-8CSB-VDIM-W /G2	11″ Circular	100W	3000K	14,480	140 lm/W	120–277V	0-10V	>80	Black or white finishes available
			4000K	16,230	164 lm/W				
			5000K	15,290	150 lm/W				
		70W	3000K	10,920	149 lm/W				
			4000K	12,050	169 lm/W				
			5000K	11,680	159 lm/W				
		50W	3000K	7,780	155 lm/W				
			4000K	8,430	171 lm/W				
			5000K	8,330	166 lm/W				
KT-RHLED150PS-11C-8CSB-VDIM /G2 KT-RHLED150PS-11C-8CSB-VDIM-W /G2	11″ Circular	150W	3000K	21,290	141 lm/W				Black or white finishes available
			4000K	23,580	163 lm/W				
			5000K	22,490	150 lm/W				
		100W	3000K	14,740	154 lm/W				
			4000K	16,090	171 lm/W				
			5000K	15,810	165 lm/W				
		70W	3000K	11,030	159 lm/W				
			4000K	11,910	175 lm/W				
			5000K	11,850	171 lm/W				
KT-RHLED200PS-12C-8CSB-VDIM /G2 KT-RHLED200PS-12C-8CSB-VDIM-W /G2	12″ Circular	200W	3000K	29,350	147 lm/W	120–277V	0-10V	>80	Black or white finishes available
			4000K	32,330	168 lm/W				
			5000K	31,640	158 lm/W				
		150W	3000K	23,440	155 lm/W				
			4000K	25,350	173 lm/W				
			5000K	25,010	166 lm/W				
		100W	3000K	15,710	162 lm/W				
			4000K	16,660	178 lm/W				
			5000K	16,780	174 lm/W				
KT-RHLED240PS-13C-8CSB-VDIM /G2 KT-RHLED240PS-13C-8CSB-VDIM-W /G2	13″ Circular	240W	3000K	34,330	144 lm/W				Black or white finishes available
			4000K	37,920	167 lm/W				
			5000K	37,010	156 lm/W				
		200W	3000K	30,400	148 lm/W				
			4000K	33,520	170 lm/W				
			5000K	32,920	161 lm/W				
		150W	3000K	24,960	155 lm/W				
			4000K	26,950	172 lm/W				
			5000K	26,920	167 lm/W				


Note: Color uniformity: CCT (Correlated Color Temperature) range as per guidelines outlined in ANSI C78.377-2017

KT-RHLEDXXXPS-1XC-8CSB-VDIM-X /G2

ROUND LED HIGH BAY FIXTURE


PHOTOMETRIC SPECIFICATIONS (KT-RHLED100PS-11C-8CSB-VDIM /G2, KT-RHLED100PS-11C-8CSB-VDIM-W /G2)

ISOCANDELA PLOT

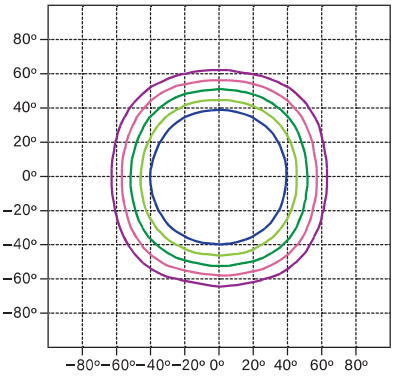

Cd: 7,266; 100%
Cd: 4,578; 63%
Cd: 2,906; 40%
Cd: 1,817; 25%
Cd: 1,163; 16%
Cd: 727; 10%
- - - - Point of Max Cd: 7,266


POLAR CANDELA DISTRIBUTION

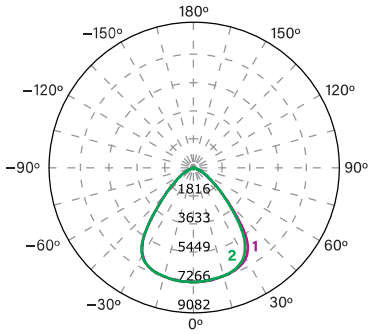

Average Diffuse Angle (50%): **85.1°**
Unit: cd **1 Violet**: C0 – C180 **2 Green**: C90 – C270

AVERAGE ILLUMINANCE EFFECTIVE FIGURE

Flux Out: 10193.17 lm

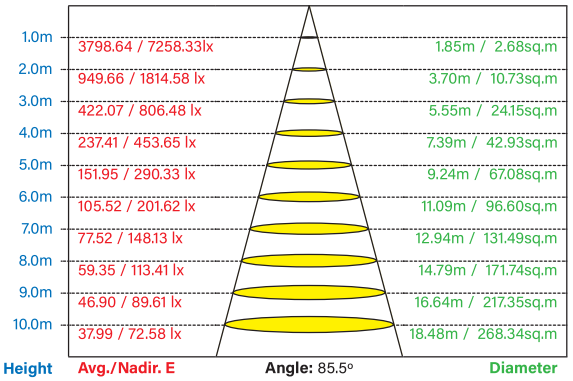


Height	Avg./Nadir. E	Diameter
1.0m	3798.64 / 7258.33lx	1.85m / 2.68sq.m
2.0m	949.66 / 1814.58 lx	3.70m / 10.73sq.m
3.0m	422.07 / 806.48 lx	5.55m / 24.15sq.m
4.0m	237.41 / 453.65 lx	7.39m / 42.93sq.m
5.0m	151.95 / 290.33 lx	9.24m / 67.08sq.m
6.0m	105.52 / 201.62 lx	11.09m / 96.60sq.m
7.0m	77.52 / 148.13 lx	12.94m / 131.49sq.m
8.0m	59.35 / 113.41 lx	14.79m / 171.74sq.m
9.0m	46.90 / 89.61 lx	16.64m / 217.35sq.m
10.0m	37.99 / 72.58 lx	18.48m / 268.34sq.m

Angle: 85.5°


PHOTOMETRIC SPECIFICATIONS (KT-RHLED150PS-11C-8CSB-VDIM /G2, KT-RHLED150PS-11C-8CSB-VDIM-W /G2)

ISOCANDELA PLOT

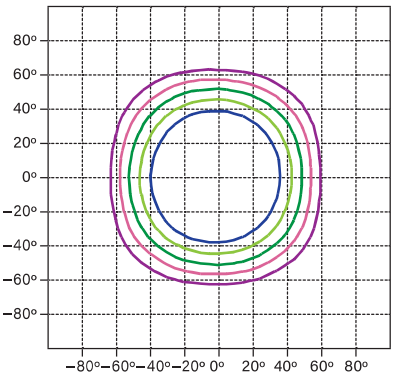

Cd: 11,347; 100%
Cd: 7,149; 63%
Cd: 4,539; 40%
Cd: 2,837; 25%
Cd: 1,816; 16%
Cd: 1,135; 10%
- - - - Point of Max Cd: 11,347


POLAR CANDELA DISTRIBUTION

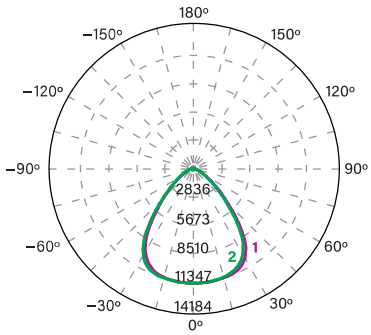

Average Diffuse Angle (50%): **83.7°**
Unit: cd **1 Violet**: C0 – C180 **2 Green**: C90 – C270

AVERAGE ILLUMINANCE EFFECTIVE FIGURE

Flux Out: 15141.21 lm

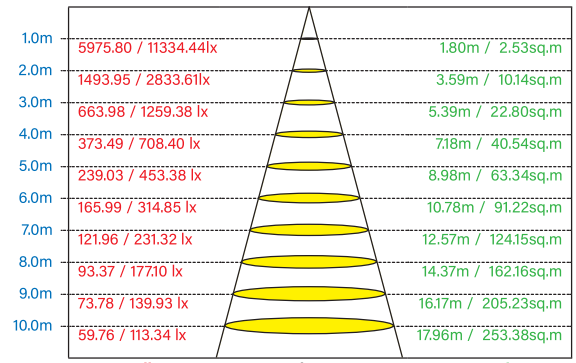

Height	Avg./Nadir. E	Diameter
1.0m	5975.80 / 11334.44lx	1.80m / 2.53sq.m
2.0m	1493.95 / 2833.61lx	3.59m / 10.14sq.m
3.0m	663.98 / 1259.38 lx	5.39m / 22.80sq.m
4.0m	373.49 / 708.40 lx	7.18m / 40.54sq.m
5.0m	239.03 / 453.38 lx	8.98m / 63.34sq.m
6.0m	165.99 / 314.85 lx	10.78m / 91.22sq.m
7.0m	121.96 / 231.32 lx	12.57m / 124.15sq.m
8.0m	93.37 / 177.10 lx	14.37m / 162.16sq.m
9.0m	73.78 / 139.93 lx	16.17m / 205.23sq.m
10.0m	59.76 / 113.34 lx	17.96m / 253.38sq.m

Angle: 83.9°


(*Photometric Specifications continued on next* page)

KT-RHLEDXXXPS-1XC-8CSB-VDIM-X /G2

ROUND LED HIGH BAY FIXTURE


PHOTOMETRIC SPECIFICATIONS (KT-RHLED200PS-12C-8CSB-VDIM /G2, KT-RHLED200PS-12C-8CSB-VDIM-W /G2)

ISOCANDELA PLOT

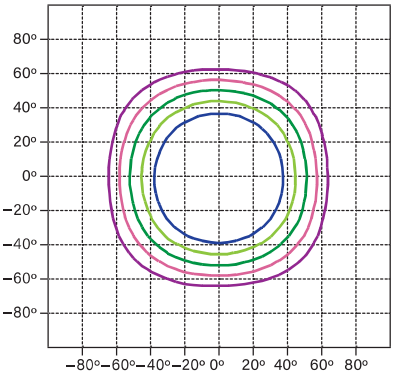

Cd: 16,071; 100%
Cd: 10,125; 63%
Cd: 6,428; 40%
Cd: 4,018; 25%
Cd: 2,571; 16%
Cd: 1,607; 10%
- - - - Point of Max Cd: 10,071


POLAR CANDELA DISTRIBUTION

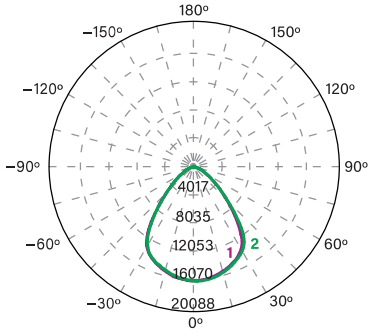

Average Diffuse Angle (50%): **83.2°**
Unit: cd **1 Violet**: C0 – C180 **2 Green**: C90 – C270

AVERAGE ILLUMINANCE EFFECTIVE FIGURE

Flux Out: 20372.48 lm

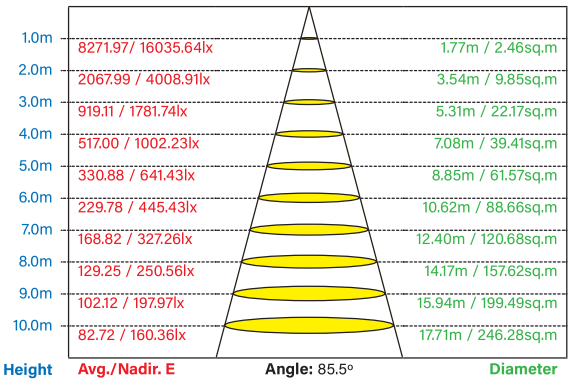


Height	Avg./Nadir. E	Diameter
1.0m	8271.97/ 16035.64lx	1.77m / 2.46sq.m
2.0m	2067.99 / 4008.91lx	3.54m / 9.85sq.m
3.0m	919.11 / 1781.74lx	5.31m / 22.17sq.m
4.0m	517.00 / 1002.23lx	7.08m / 39.41sq.m
5.0m	330.88 / 641.43lx	8.85m / 61.57sq.m
6.0m	229.78 / 445.43lx	10.62m / 88.66sq.m
7.0m	168.82 / 327.26lx	12.40m / 120.68sq.m
8.0m	129.25 / 250.56lx	14.17m / 157.62sq.m
9.0m	102.12 / 197.97lx	15.94m / 199.49sq.m
10.0m	82.72 / 160.36lx	17.71m / 246.28sq.m

Angle: 85.5°


PHOTOMETRIC SPECIFICATIONS (KT-RHLED240PS-13C-8CSB-VDIM /G2, KT-RHLED240PS-13C-8CSB-VDIM-W /G2)

ISOCANDELA PLOT

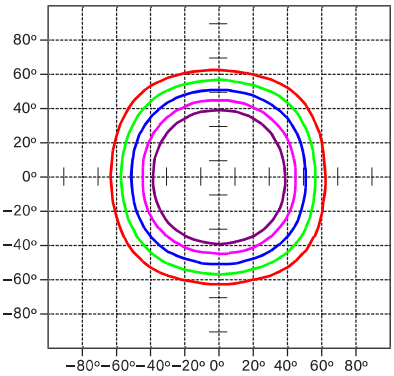

Cd: 18,558; 100%
Cd: 11,692; 63%
Cd: 7,423; 40%
Cd: 4,640; 25%
Cd: 2,969; 16%
Cd: 1,856; 10%
- - - - Point of Max Cd: 18,558


POLAR CANDELA DISTRIBUTION

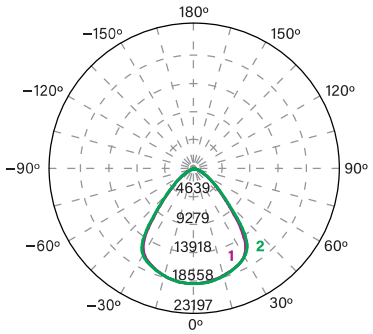

Average Diffuse Angle (50%): **83.9°**
Unit: cd **1 Violet**: C0 – C180 **2 Green**: C90 – C270

AVERAGE ILLUMINANCE EFFECTIVE FIGURE

Flux Out: 24740.39lm

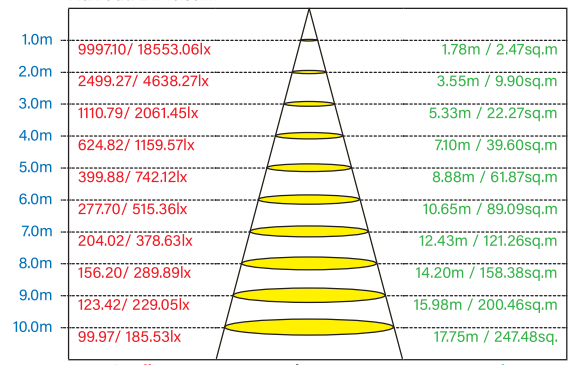

Height	Avg./Nadir. E	Diameter
1.0m	9997.10/ 18553.06lx	1.78m / 2.47sq.m
2.0m	2499.27/ 4638.27lx	3.55m / 9.90sq.m
3.0m	1110.79/ 2061.45lx	5.33m / 22.27sq.m
4.0m	624.82/ 1159.57lx	7.10m / 39.60sq.m
5.0m	399.88/ 742.12lx	8.88m / 61.87sq.m
6.0m	277.70/ 515.36lx	10.65m / 89.09sq.m
7.0m	204.02/ 378.63lx	12.43m / 121.26sq.m
8.0m	156.20/ 289.89lx	14.20m / 158.38sq.m
9.0m	123.42/ 229.05lx	15.98m / 200.46sq.m
10.0m	99.97/ 185.53lx	17.75m / 247.48sq.

Angle: 83.2°


Curves show illuminated area and average illumination when lamp is at various distances.

KT-RHLEDXXXPS-1XC-8CSB-VDIM-X /G2


ROUND LED HIGH BAY FIXTURE

PHYSICAL SPECIFICATIONS

J-HOOK
KT-RHLED100PS-11C-8CSB-VDIM-X /G2
KT-RHLED150PS-11C-8CSB-VDIM-X /G2

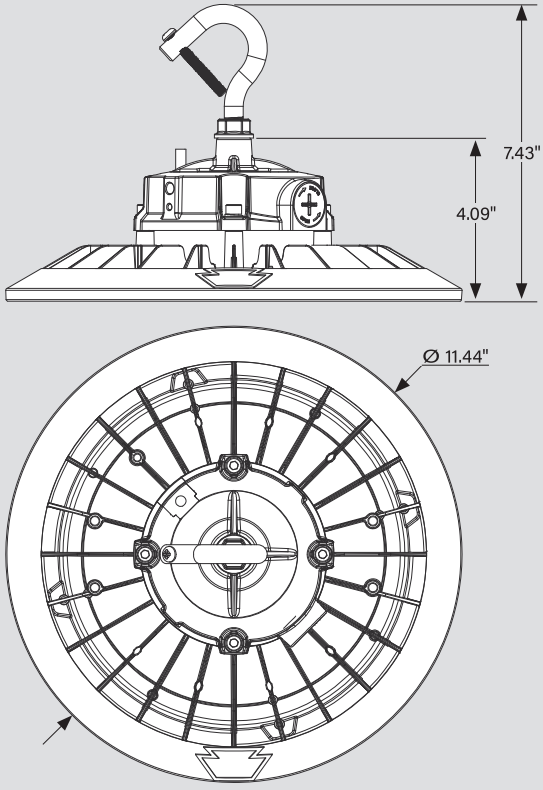


J-HOOK
KT-RHLED200PS-12C-8CSB-VDIM-X /G2
KT-RHLED240PS-13C-8CSB-VDIM-X /G2

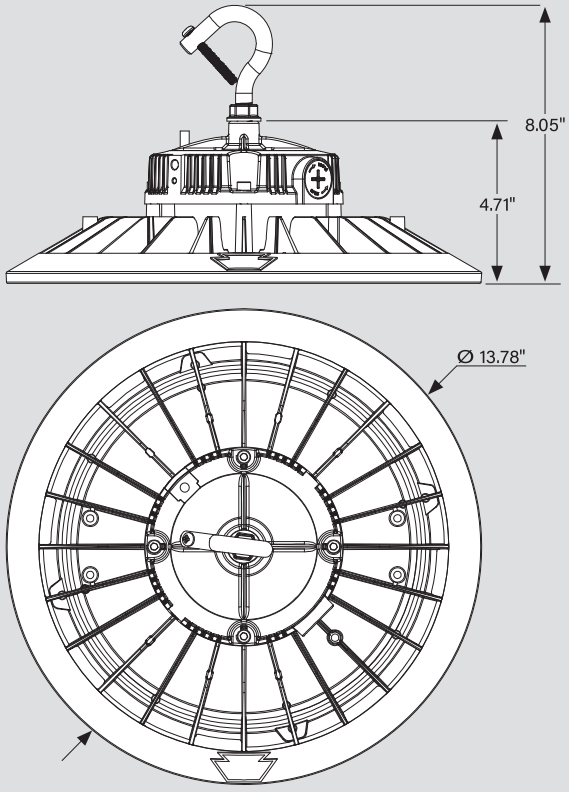

QUICK-INSTALL

1. Ensure power is off to the fixture.
2. Remove 1/2" knock-out (KO) plug.
3. Screw in sensor head. (see illustrations)
4. Re-connect power when ready.
5. Program desired settings as needed with Keystone Remote Control.

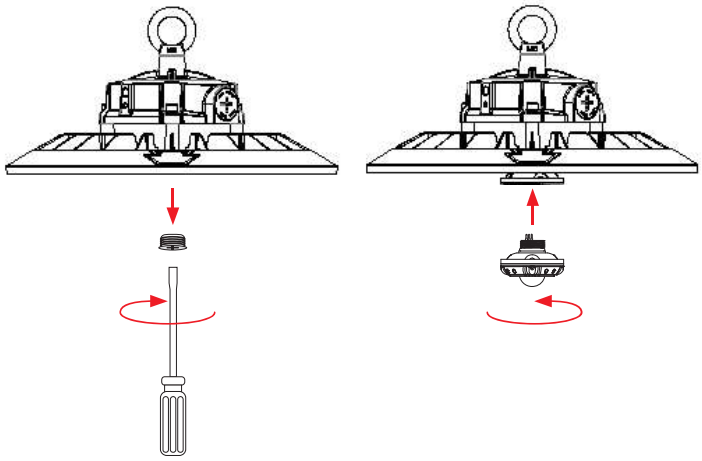

KT-RHLEDXXXPS-1XC-8CSB-VDIM-X /G2

ROUND LED HIGH BAY FIXTURE


ACCESSORIES

SENSORS/CONTROLLERS

Factory-Installable OR Field-Installable (field-installable purchased separately)

✓	Suffix*	Catalog Number	Description	UPC	Easy Code
	/FC3**	KTSL-FC3-12V-PKO-PIR	Bluetooth mesh screw-in PIR occupancy senor with built-in fixture controller for SmartLoop LLLC system	843654138862	OCW-60
	/FC4	KTSL-FC4-12V-PKO	Bluetooth mesh wireless screw-in low voltage fixture controller for SmartLoop system; 12V; 0–10V dimming	843654149066	RUN-10
	/PIR	KTS-PIR3-12V-PKO /G2	Screw-in PIR multifunction sensor, preset for 10 min hold time, ∞ min standby time at 50% dim, daylight	843654146447	GLF-99
	/MW3	KTS-MW3-12V-PKO	Screw-in microwave multifunction sensor, preset for 10 min hold time, ∞ min standby time at 50% dim, daylight disable	843654135212	TRM-32

** For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).*
*** When installing on Keystone highbay lights and an IP tight connection is desired, use the large gasket provided with the sensor to ensure proper electrical connection and water tight seal. Hand tighten only.*

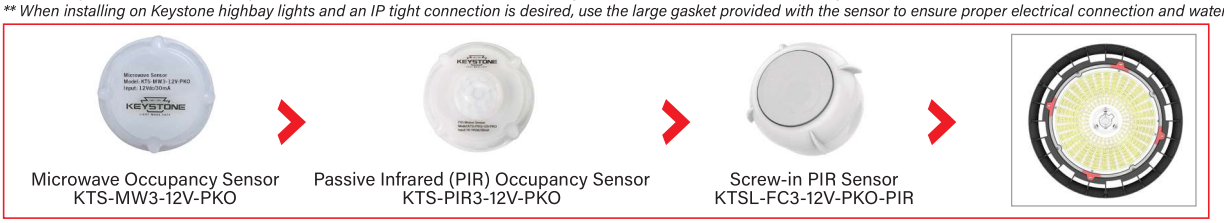

Microwave Occupancy Sensor
KTS-MW3-12V-PKO

Passive Infrared (PIR) Occupancy Sensor
KTS-PIR3-12V-PKO

Screw-in PIR Sensor
KTSL-FC3-12V-PKO-PIR

Field-Installable / Field-Use ONLY (purchased separately)

Catalog number	Description	UPC	Easy Code
KTS-MW3-REMOTECONTROL	Remote control for KTS-MW3-12V-PKO and KTS-PIR3-12V-PKO sensors, used to set and adjust all senor settings	843654132020	XSR-61

CORD SETS

Factory-Installable OR Field-Installable (field-installable purchased separately)

✓	Suffix*	Catalog number	Description	UPC	Easy Code
	/L515P	KT-P-L515P	125V NEMA L5-15P twist lock plug	843654123486	GEW-06
	/L615P	KT-P-L615P	250V NEMA L6-15P twist lock plug	843654138619	VPX-09
	/L715P	KT-P-L715P	277V NEMA L7-15P twist lock plug	843654123493	ETV-78

** For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).*
***Note:** For cord sets not listed here, please contact your Keystone sales rep.*

EMERGENCY BACKUPS

Factory-Installable OR Field-Installable (field-installable purchased separately)

✓	Suffix*	Catalog number	Description	UPC	Easy Code
	/EM	KT-EMRG-LED-40SD-5000-CEN /SF**	One Piece 40W Constant Wattage Design with Self Diagnositics. Approx 5000 lumens, Single Flex Cable with Included J-Box, 120-277V Input. CEC T20 Compliant.	843654144320	UGW-62

** For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).*
*** KT-RHLED200PS-12C-8CSB-VDIM /G2/EM Available for Quick Ship*
† Factory installation of emergency backup units will automatically include any relevant mounting bracket.
***EM cannot be used in conjunction with screw-in sensors on these fixtures.*

(*Accessories continued on next* page)

KT-RHLEDXXXPS-1XC-8CSB-VDIM-X /G2


ROUND LED HIGH BAY FIXTURE

ACCESSORIES (continued)

MOUNTS/BRACKETS

Field-Installable / Field-Use ONLY (purchased separately)

✓	Suffix*	Catalog number	Description	UPC	Easy Code
	-	KT-RHLED-JBOX-PM /G2	J-Box Optimized for Pole Pendant and Step-Down Transformer Applications.	843654133300	RAQ-94
	-	KT-RHLED-JBOX-PM-W /G2	J-Box Optimized for Pole Pendant and Step-Down Transformer Applications. White.	843654138756	IDT-59
	-	KT-RHLED-WG-1-KIT /G2	Wire guard kit for for 100W and 150W Color & Power Select G2 Round LED High Bay Fixtures; Includes mounting hardware.	843654133263	NPV-09
	-	KT-RHLED-WG-2-KIT /G2	Wire guard kit for for 200W and 240W Color & Power Select G2 Round LED High Bay Fixtures; Includes mounting hardware.	843654133270	PHU-26
	-	KT-RHLED-SM-1-KIT /G2	Surface Mount Kit for 100W and 150W Color & Power Select G2 Round LED High Bay Fixtures. Mounting Hardware Included.	843654133249	JXD-63
	-	KT-RHLED-SM-1-KIT-W /G2	Surface Mount Kit for 100W and 150W Color & Power Select G2 Round LED High Bay Fixtures. Mounting Hardware Included. White.	843654162850	XLA-73
	-	KT-RHLED-SM-2-KIT /G2	Surface Mount Kit for 200W and 240W Color & Power Select G2 Round LED High Bay Fixtures. Mounting Hardware Included.	843654133256	BLT-11
	-	KT-RHLED-SM-2-KIT-W /G2	Surface Mount Kit for 200W and 240W Color & Power Select G2 Round LED High Bay Fixtures. Mounting Hardware Included. White.	843654138763	UJS-44

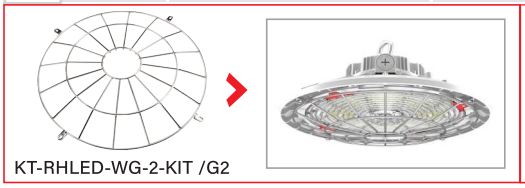
KT-RHLED-WG-2-KIT /G2


Surface Mount Kit
KT-RHLED-SM-2-KIT-W /G2


J-Box
KT-RHLED-JBOX-PM-W /G2

STEP-DOWN TRANSFORMERS

Factory-Installable OR Field-Installable (field-installable purchased separately)

✓	Suffix*	Catalog Number	Description	UPC	Easy Code
	/480†	KTAT-250-480-277 /SF	Fully enclosed, single flex step-down transformer for LED high bay fixtures (250VA or lower)	843654102931	XIM-17


Step-Down Transformer
KTAT-250-480-277 /SF



** For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).*
† Factory installation of step-down transformer units will automatically include any relevant mounting bracket.

KT-RHLEDXXXPS-1XC-8CSB-VDIM-X /G2

ROUND LED HIGH BAY FIXTURE

ACCESSORIES (continued)

LENSES/REFLECTORS

Field-Installable / Field-Use ONLY (purchased separately)

✓	Suffix*	Catalog Number	Description	UPC	Easy Code
	-	KT-RHLED-AR90-1-KIT /G2	Aluminum Dome Reflector for 100W and 150W Color & Power Select G2 Round LED High Bay Fixtures; Includes mounting hardware.	843654133287	ZOV-89
	-	KT-RHLED-AR90-2-KIT /G2	Aluminum Dome Reflector for 200W and 240W Color & Power Select G2 Round LED High Bay Fixtures; Includes mounting hardware.	843654133294	GBN-40
	-	KT-RHLED-CL90-1-KIT /G2	Clear Polycarbonate Reflector for 100W and 150W Color & Power Select G2 Round LED High Bay Fixtures; Includes mounting hardware.	843654133614	FVZ-16
	-	KT-RHLED-CL90-2-KIT /G2	Clear Polycarbonate Reflector for 200W and 240W Color & Power Select G2 Round LED High Bay Fixtures; Includes mounting hardware.	843654133621	SFZ-16



Aluminum Dome Refelctor
KT-RHLED-AR90-2-KIT /G2





Clear polycarbonate dome refelctor
KT-RHLED-CL90-2-KIT /G2



** Screw in PIR sensors can not be used with KT-RHLED-CL90-2-KIT /G2*

ORDERING INFORMATION

Order Code	Carton QTY	UPC	Easy Code	DLC Product ID
KT-RHLED100PS-11C-8CSB-VDIM /G2	1	843654160825	VZG-04	S-9NV65K
KT-RHLED100PS-11C-8CSB-VDIM /G2/TAA	1	843654183794	DPJ-65	
KT-RHLED100PS-11C-8CSB-VDIM-W /G2	1	843654160863	AKY-89	S-9NV65K
KT-RHLED100PS-11C-8CSB-VDIM-W /G2/TAA	1	TBD	TBD	
KT-RHLED150PS-11C-8CSB-VDIM /G2	1	843654160832	FXZ-79	S-BVBJFS
KT-RHLED150PS-11C-8CSB-VDIM /G2/TAA	1	843654183800	QNS-16	
KT-RHLED150PS-11C-8CSB-VDIM-W /G2	1	843654160870	HJX-98	S-BVBJFS
KT-RHLED150PS-11C-8CSB-VDIM-W /G2/TAA	1	TBD	TBD	
KT-RHLED200PS-12C-8CSB-VDIM /G2	1	843654160849	ENH-80	S-9VD33L
KT-RHLED200PS-12C-8CSB-VDIM /G2/TAA	1	843654183817	DLY-43	
KT-RHLED200PS-12C-8CSB-VDIM-W /G2	1	843654160887	FXR-90	S-9VD33L
KT-RHLED200PS-12C-8CSB-VDIM-W /G2/TAA	1	TBD	TBD	
KT-RHLED240PS-13C-8CSB-VDIM /G2	1	843654160856	CXC-07	S-Y5ZT80
KT-RHLED240PS-13C-8CSB-VDIM /G2/TAA	1	TBD	TBD	
KT-RHLED240PS-13C-8CSB-VDIM-W /G2	1	843654160894	PWY-88	S-Y5ZT80
KT-RHLED240PS-13C-8CSB-VDIM-W /G2/TAA	1	TBD	TBD	

ORDERING INFORMATION - QUICK SHIP PRODUCTION ITEMS

Order Code	Carton QTY	UPC	Easy Code
KT-RHLED200PS-12C-8CSB-VDIM /G2/EM	1	843654166209	SJL-18

(*Ordering Information continued on next* page)

KT-RHLEDXXXPS-1XC-8CSB-VDIM-X /G2

ROUND LED HIGH BAY FIXTURE

CATALOG NUMBER BREAKDOWN

KT-RHLEDXXXPS-1XC-8CSB-VDIM-X /G2

1	2	3	4	5	6	7	8	9	10	11	12

1 Keystone Technologies
2 Round Highbay LED Fixture
3 Wattage
4 Power Selectable
5 Circular Nominal Size
6 80 CRI
7 Color Selectable
8 Color Select Designation
9 0-10V Dimming
10 Housing Color
11 2nd Generation
12 TAA Compliant

8 Color Select Designation

B	3000K, 4000K, 5000K

5 Size / Shape

11C	11" Circular
12C	12" Circular
13C	13" Circular

10 Housing Color

	Black
W	White

12 TAA Compliant

/TAA	Made In Mexico

ORDERING EXAMPLES

FIXTURE WITH MULTIPLE FACTORY-INSTALLED ACCESSORIES*

KT-RHLEDXXXPS-1XC-8CSB-VDIM-X /G2 /FC3/L515P/EM/WG/480

FIXTURE WITH MULTIPLE FACTORY-INSTALLED ACCESSORIES*

KT-RHLEDXXXPS-1XC-8CSB-VDIM-X /G2 /FC3/EM/WG

FIXTURE WITH TWO FACTORY-INSTALLED ACCESSORIES*

KT-RHLEDXXXPS-1XC-8CSB-VDIM-X /G2 /FC3/L515P

FIXTURE WITH SINGLE FACTORY-INSTALLED ACCESSORY

KT-RHLEDXXXPS-1XC-8CSB-VDIM-X /G2 /FC3

FIXTURE WITH NO FACTORY-INSTALLED ACCESSORIES

KT-RHLEDXXXPS-1XC-8CSB-VDIM-X /G2

** When ordering more than one factory-installed accessory, use multiple suffixes as shown in the ordering examples above.*
*** When installing on Keystone highbay lights and an IP tight connection is desired, use the xxxx gasket provided with the sensor to ensure proper electrical connection and water tight seal. Hand tighten only.*
***Note:** All accessories can also be ordered separately for field installation using just their regular Catalog Number, UPC, or Easy Code.*

KEYSTONE FIXTURE

Catalog number
KT-RHLEDXXXPS-1XC-8CSB-VDIM-X /G2

SENSORS

✓	Suffix	Catalog number
✓	/FC3**	KTSL-FC3-12V-PKO-PIR

CORD SETS

✓	Suffix	Catalog number
✓	/L515P	KT-P-L515P

EMERGENCY BACKUP

✓	Suffix	Catalog number
✓	/EM	KT-EMRG-LED-40SD-5000-CEN /SF

MOUNTS AND BRACKETS

✓	Suffix	Catalog number
✓	/WG	KT-RHLED-WG-2-KIT /G2

STEP DOWN TRANSFORMER

✓	Suffix	Catalog number
✓	/480	KTAT-250-480-277 /SF