



KTEB-132-UV-TP-SL

T8 ELECTRONIC BALLAST



DESCRIPTION

1x F32T8 | 120-277V | High Power Factor | Rapid Start

STARTING METHOD: Rapid
LAMP CONNECTION: Parallel
INPUT VOLTAGE: 120-277VAC ±10%
INPUT FREQUENCY: 50/60 Hz
BALLAST FACTOR (LIGHT OUTPUT): Normal
WARRANTY: 3 Years




PRODUCT FEATURES

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 140°F, 75°F
- Meets FCC Part 18 (Class B) Consumer Limits
- OCV: 600V

ELECTRICAL SPECIFICATIONS

Lamp Type	No. of Lamps	Input Volts	Input Watts	Input Current	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD
F32T8	1	120V	32W	0.27A	0.99	1.34	1.00	3.13	10%
		277V	32W	0.12A	0.99	1.34	1.00	3.13	10%
F25T8	1	120V	25W	0.22A	0.99	1.45	1.00	4.00	10%
		277V	26W	0.10A	0.98	1.46	1.00	3.85	10%
F17T8	1	120V	20W	0.17A	0.99	1.56	1.00	5.00	12%
		277V	21W	0.08A	0.98	1.56	1.00	4.76	12%

WIRING DIAGRAM

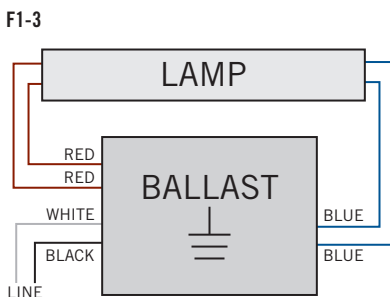

HOT SPOT LOCATION






KTEB-132-UV-TP-SL

T8 ELECTRONIC BALLAST

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS



LENGTH	9.45"
WIDTH	1.15"
HEIGHT	1.26"
MOUNTING	8.90"
CASE STYLE	L34

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACKAGE QUANTITY	ITEM STATUS
KTEB-132-UV-TP-SL-CP	Carton Pack	TBD	Active

CATALOG NUMBER BREAKDOWN

KTEB-132-UV-TP-SL-CP

Keystone Technologies Electronic Ballast	1	Wattage	Universal Voltage	Instant Start	Slim Case Style	Packaging Style