

Features & Benefits

- No rewiring needed
- Works with fluorescent electronic T5 ballast
- Long life
- High CRI
- Instant on, no delay
- Convenient and quick installation
- Utilizes existing T5 sockets
- No Mercury, No UV
- Compatible with controls and sensors
- Works in cold temperature applications
- High Performance PC lens
- Super Wide View Angle, 180 degree
- 5 Year Warranty



* EMERGENCY BALLAST RESTRICTIONS



RetroFlex™
LED T5HO LAMP • Simplicity.


Commercial Grade **LED T5 Lamp**

Specification Data

Order Code	Length	Lamp Power	Input Voltage (Depend on Ballast)	CCT	Initial Lumens	CRI	Beam Angle	Lamp Efficacy	System Efficacy	Life	DLC
L48T5/850/24P-EB 48	48	24W	120/277V, 347V	5000K	2700	83	180	112	100	40000	Yes
L48T5/840/24P-EB 48	48	24W	120/277V, 347V	4000K	2700	83	180	112	100	40000	Yes
L48T5/835/24P-EB 48	48	24W	120/277V, 347V	3500K	2700	83	180	112	100	40000	Yes

PRODUCT SPECIFICATIONS

Photometric Data

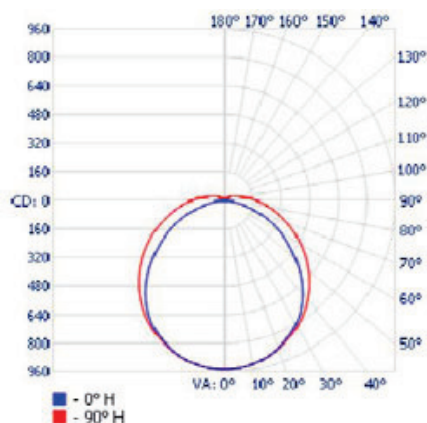

Wiring diagram

* Not compatible with products equipped with battery backup and/or emergency ballasts.

* Please refer to "Ballast Compatibility List" on Related Downloads.

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.