

Features & Benefits

Type A Application:

- Works on existing compatible Instant Start, Programmed Start, Dimming electronic ballast

Type B Application:

- Internal Driver (Direct 120-277VAC input)
- Long life | High CRI
- Instant on, no delay
- Convenient and quick installation
- Utilizes existing instant start or rapid start sockets
- Compatible with controls and sensors
- Works in cold temperature applications
- Glass tube for superior optical performance
- 5 Year Warranty



* EMERGENCY BALLAST RESTRICTIONS




UniFlex™

Commercial Grade LED T8 Lamp

Specification Data (with Normal Ballast Factor)

Order Code	Length	Input Voltage	Power Direct AC	Power w/ Ballast	CCT	Lumen	CRI	Beam Angle	Lamp Efficacy Direct AC	System Efficacy w/ Ballast	Life	DLC
L48T8/830/12G-AB	48	120-277V	12	15	3000K	1800	83	325Å°	150	120	50000	Yes
L48T8/835/12G-AB	48	120-277V	12	15	3500K	1800	83	325Å°	150	120	50000	Yes
L48T8/840/12G-AB	48	120-277V	12	15	4000K	1800	83	325Å°	150	120	50000	Yes
L48T8/850/12G-AB	48	120-277V	12	15	5000K	1800	83	325Å°	150	120	50000	Yes

Wiring diagram

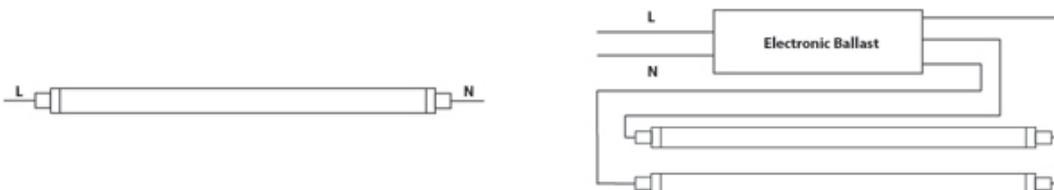

* Please refer to "Ballast Compatibility List" for compatible battery backup and/or emergency ballasts.

* Please refer to "Ballast Compatibility List" on Related Downloads.

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.