






REVISIONS		
REV	DESCRIPTION	DATE
D0	CHANGED PER ECN 15-009 & 15-010	05/08/2015
C0	CHANGED PER ECN 15-002	01/21/2015
B1	CHANGED PER ECN 14-019	09/22/2014
B0	CHANGED PER ECN 14-007	04/07/2014
A1	Manufacturing setting added, output wires lenght changed	04/02/2014
A0	RELEASE TO PRODUCTION	03/21/2014


**Specifications:**

- Input: 10.5~15Vac, 1.5A, non-isolated.
- Output Voltage: 5.0~6.5Vdc
- Output Current (±5%): 1500mA, 1100mA, 600mA, 230mA Selectable
- Efficiency: 75% minimum @ FULL LOAD
- Protection: SCP
- Operation Temp: -20C~+50C
- 60K hours warranty @Tcase of 75°C
- Location: Dry and damp locations use only, IP65
- UL certification: UL8750 and UL1310 (Class 2)
- Case material: rated UL94 V-2 minimum
- RoHS Compliant




Add label  
(U1 date code information)

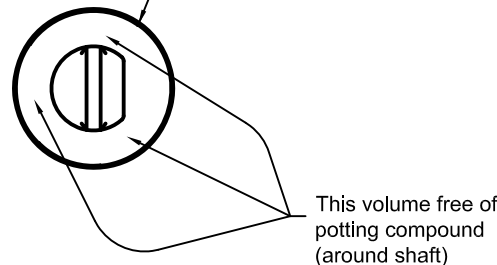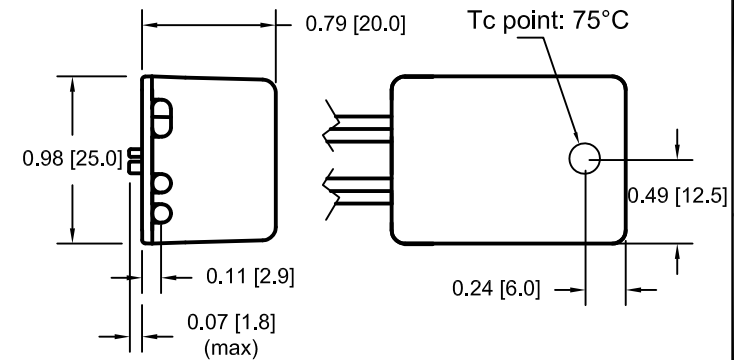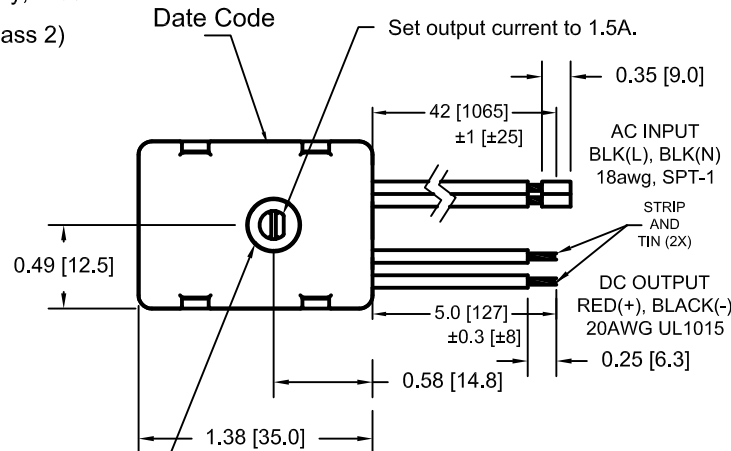





**Model: LA1012-6-C1500**  
**P/N: 20-3235 rev D**  
**AC In: 12~15Vac, 1.5A**  
**DC Out: 1.5A, 5~6.5Vdc**



**Input**  
**Black (L)**    **RoHS**  
**Black (N)**



**Output**  
**Red (+)**  
**Black (-)**

MANUFACTURED BY:				
THIS ITEM IS THE PROPERTY OF MAGTECH INDUSTRIES AND CONTAINS PROPRIETARY CONFIDENTIAL AND TRADE SECRET INFORMATION. THE INFORMATION CONTAINED HEREIN MUST NOT BE USED, DISCLOSED OR REPRODUCED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN CONSENT FROM MAGTECH IND.				
UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES (MM) TOLERANCES: .X DECIMALS± .05 (1.3) .XX DECIMALS± .02 (0.5) .XXX DECIMALS± .005 (0.13) ANGLES± 1° FRACTIONS± 1/16	QC:			
T I T L E : LA1012-6-C1500, CN-0267, 12W, 12VAC IN, 1.5A MAX, 5~6.5V				
DO NOT SCALE THIS DRAWING INTERPRET DRAWING PER ANSI Y14.5M	APPROVAL DATE: 04/08/2014	MODEL NO. LA1012-6-C1500	DWG NO. M20-3235	REV. D0 SH OF 1 1