

LED PLL SERIES

DIReCT LED PLL/BIAX



Project Name:

Notes:

Distribution Partner:

COMMERCIAL SPEC GRADE

Replaces 40W/55W Fluorescent PLL



Superior Wide-Beam Light Distribution



Coated Shatter-Resistant Glass

FEATURES

- DIReCT Replacement for Easy Installation
- Shatter-Resistant Polycarbonate Lens
- Universal Input Voltage - 120-277V, 347V
- Uniform Light Output From End-to-End
- Instant-ON with No Flicker
- 5-Year Warranty
- UL Listed



Proprietary IC-Driver design allows for high efficiency and exceptional longterm performance



ARCHIPELAGO® Light Engine produces uniform light output from end-to-end



Specifications and Technical (PLL/BIAX, DIReCT)


MODEL	BASE TYPE	WATTS / EQV.	LUMEN	CCT	LENGTH	VOLTAGE	CRI	THD	CARTON QTY	LIGHT DISTRIBUTION
LBX1635K1	2G11	15W / 40W	1450LM	3500K	2 FT	120-277, 347V	83	<20%	16	240°
LBX1641K1	2G11	15W / 40W	1450LM	4100K	2 FT	120-277, 347V	83	<20%	16	240°
LBX2035K1	2G11	19W / 55W	1900LM	3500K	2 FT	120-277, 347V	83	<20%	16	240°
LBX2041K1	2G11	19W / 55W	1900LM	4100K	2 FT	120-277, 347V	83	<20%	16	240°

* Suitable for use in totally enclosed fixtures

** Suitable for damp locations. Not for use where exposed to the weather or moisture


*** Visit <http://www.archipelagolighting.com/support> for ballast compatibility list

Installation Configuration

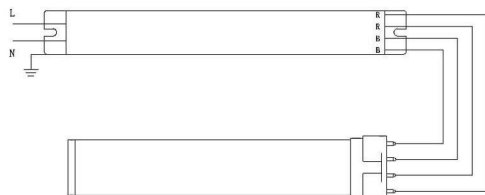

DIReCT

Light Distribution Curve



www.archipelagolighting.com | e: info@archipelagolighting.com

t: (866) 912-3220 | f: (909) 627-2887 | t: @ArchipelagoLED