

Driver LC 34W 690–825mA 0-10V fixC Ip SNC UNV

Linear essence series

**Product description**


- _ Constant current LED driver
- _ Only for US applications
- _ Dimmable via 0 ... 10 V
- _ Dimming range 10 to 100 %
- _ Class 2
- _ FCC Part 15
- _ Meets UL 8750 SF3.1
- _ Meets DesignLights Consortium 4.3
- _ Temperature protection as per UL8750/UL Recognized
- _ Adjustable output current 690 or 825 mA
- _ Max. output power 34 W
- _ Nominal lifetime up to 50,000 h
- _ 5 years guarantee (conditions at www.tridonic.com)

Housing properties

- _ Casing: metal, white
- _ Type of protection IP20
- _ Dry and damp location

Functions

- _ Overload protection
- _ Short-circuit protection
- _ No-load protection
- _ Overtemperature protection

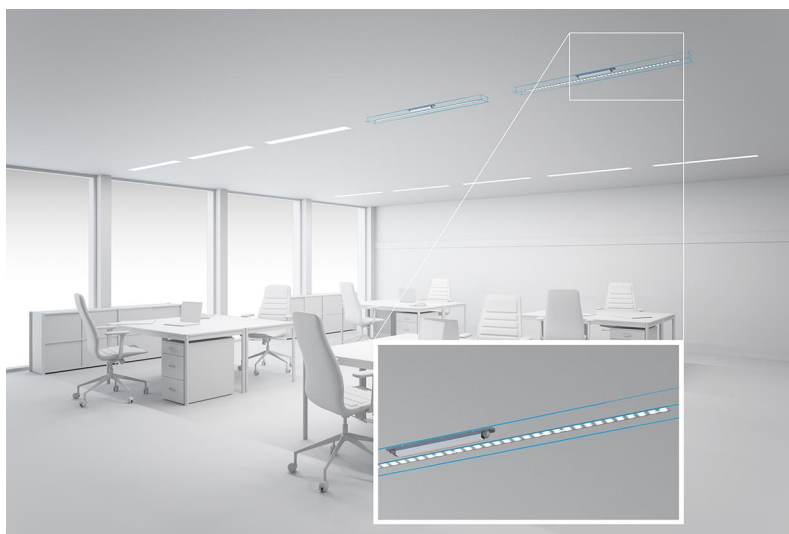Website
<http://www.tridonic.us/87500862>


Spotlights



Downlights



Linear



Area



Floor | Wall



Free-standing




Street



Decorative

Driver LC 34W 690–825mA 0-10V fixC Ip SNC UNV
Linear essence series

The complete data sheet for this product is available in the Downloads section.

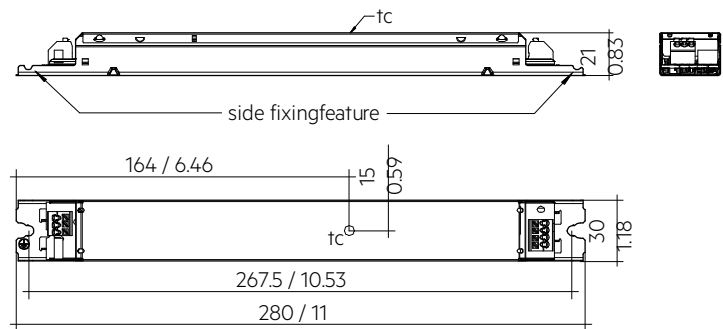

Dimensions in mm / inch

Ordering data					
Type	Article number	Packaging, carton	Packaging, low volume	Packaging, high volume	Weight per pc.
LC 34/690-825/50 0-10V fixC Ip SNC UNV	87500862	50 pc(s).	900 pc(s).	2,700 pc(s).	0.39 lbs

Technical data

Rated supply voltage	120 – 277 V
AC voltage range	108 – 305 V
Mains frequency	50 / 60 Hz
Leakage current (at 120 V, 60 Hz, full load) ^{①②}	< 700 µA
Leakage current (at 277 V, 60 Hz, full load) ^{①②}	< 700 µA
Typ. efficiency (at 120 V, 60 Hz, full load) ^②	84 %
Typ. efficiency (at 277 V, 60 Hz, full load) ^②	87 %
λ (at 120 V, 60 Hz, full load) ^①	> 0.95C
λ (at 277 V, 60 Hz, full load) ^①	> 0.95C
Typ. input current in no-load operation (at 120 V, 60 Hz)	15 mA
Typ. input current in no-load operation (at 277 V, 60 Hz)	23 mA
Typ. input power in no-load operation (at 120 V, 60 Hz)	0.31 W
Typ. input power in no-load operation (at 277 V, 60 Hz)	0.41 W
In-rush current (peak / duration at 120 V)	3.4 A / 28 µs
In-rush current (peak / duration at 277 V)	3.4 A / 21 µs
THD (at 120 V, 60 Hz, full load) ^①	< 20 %
THD (at 277 V, 60 Hz, full load) ^①	< 20 %
Starttime (at 120V, 60 Hz, full load) ^①	≤ 500 ms
Starttime (at 277V, 60 Hz, full load) ^①	≤ 500 ms
Turn off time at full load	< 500 ms
Hold time (power failure, full load)	0 s
Output current tolerance ^{①③}	± 5 %
Max. output current peak (non-repetitive)	≤ output current + 15 %
Output LF current ripple (< 120 Hz)	± 15 %
Max. output voltage (U-OUT)	60 V
Dimming range	10 – 100 %
Mains surge capability (between L - N)	2 kV
Mains surge capability (between L/N - PE)	2 kV
Surge voltage at output side (against PE)	3.5 kV
Surge ring wave protection	2.5 kV
Type of protection	IP20
Lifetime	up to 50,000 h
Guarantee (conditions at www.tridonic.com)	5 Year(s)
Dimensions L x W x H	11 x 1.18 x 0.83 inch

Approval marks**Standards**

UL 8750, UL 1310, UL 840, CSA C22.2, FCC PART 15

Specific technical data

Type	Output current ^④	Min. output voltage	Max. output voltage	Max. output power (at 120 V, 60 Hz, full load)	Typ. power consumption (at 120 V, 60 Hz, full)	Typ. current consumption (at 120 V, 60 Hz, full)	Typ. power consumption (at 277 V, 60 Hz, full)	Typ. current consumption (at 277 V, 60 Hz, full)	tc point max. ^④	Ambient temperature _{ta}	Iout select
LC 34/690-825/50 0-10V fixC Ip SNC UNV	690 mA	30 V	49.5 V	34.2 W	41.2 W	352 mA	39.1 W	143 mA	167 °F	-4 ... +122 °F	1
LC 34/690-825/50 0-10V fixC Ip SNC UNV	825 mA	30 V	41.2 V	34.0 W	40.0 W	350 mA	39.0 W	160 mA	167 °F	-4 ... +122 °F	ON

① Valid at 100 % dimming level.

② Depending on the selected output current.

③ 5-year guarantee.

④ Output current is mean value.